

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
R.R.	06-0032-00-SW	MOULTRIE	24	3
F.A.				
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-		

CONTRACT #9556I

- Pavement grades shown are at the top of pavement surfaces, unless otherwise noted in the plans.
- Erosion control measures shall be in accordance with IDOT Specifications. Placement shall be directed by the Engineer.
- All elevations refer to U.S.G.S. mean sea level datum.
- Any reference to a standard in the plans shall be interpreted to mean the edition as indicated by the sub-number listed on Sheet 2.
- The contractor shall be responsible for protecting the utility property from construction operations as outlined in Article 107.3I of the Standard Specifications. The J.U.L.I.E. number is 800-892-0123. A minimum of 48 hours advance notice is required. The utility members of J.U.L.I.E. known to be within the limits of the improvements:

ELECTRIC

Shannon Risley
City of Sullivan
2W Harrison Street
Sullivan, Illinois 61951
217-728-4383

TELEPHONE

Matt Briggs - (309) 663-3886
Aaron Vercimak (Area Tech) - (309) 663-3131
Verizon North, Inc.
1312 E. Empire Street
Mailcode: ILLAON
Bloomington, Illinois 61701

GAS

Rick Barnes
City of Sullivan
2W Harrison Street
Sullivan, Illinois 61951
217-728-4383

WATER, SEWER

A.D. Birt
City of Sullivan
2W Harrison Street
Sullivan, Illinois 61951
217-728-4383

CABLE TV

Kelly Barger
MediaCom, LLC
4290 Bluestem Road
Charleston, Illinois 61920
217-345-7071

STREET AND ALLEYS

Toby Shafer
City of Sullivan
2W Harrison Street
Sullivan, Illinois 61951
217-728-4383

- The following rates of application have been assumed in calculating plan quantities:

Bituminous Concrete	115 lbs/Inch/SY
Nitrogen Fertilizer Nutrient	90 lbs/Acre
Phosphorus Fertilizer Nutrient	90 lbs/Acre
Potassium Fertilizer Nutrient	90 lbs/Acre
Agricultural Ground Limestone	2 Tons/Acre
Mulch, Method 2	2 Tons/Acre
Temporary Erosion Control Seeding	100 lbs/Acre

- Before ordering storm sewers, pipe culverts or pipe drains, the Contractor shall consult the Engineer for exact lengths.


8. CURB AND GUTTER, WALKS, SLABS, AND PCC DRIVEWAY PAVEMENT 8"

A. Concrete curb and gutter shall be in accordance with IDOT Std. Spec. Locate contraction joints at 20 ft on center, unless otherwise shown. Locate expansion joints at minimum 100 ft. on center, unless otherwise shown.

B. Concrete walks, islands, and other slabs shall be in accordance with IDOT Std. Spec. Unless otherwise shown, locate sidewalk contraction joints at 5 ft on center and expansions joints at 50 ft on center, unless otherwise shown, locate contraction joints in larger slabs at 15 ft intervals in each direction, reinforced with lubricated smooth dowel bars (3/4 in. diameter, 18 in. length, at 12 in. centers).

C. Concrete walks crossing through entrances shall be constructed in accordance with the detail shown below. Monolithically constructed sidewalks will not be allowed.

D. Dowel bars shall be used when Portland Cement Concrete Driveways are placed adjacent to any existing concrete. The dowel bars shall be 2 feet in length and shall be placed on 2 foot centers.

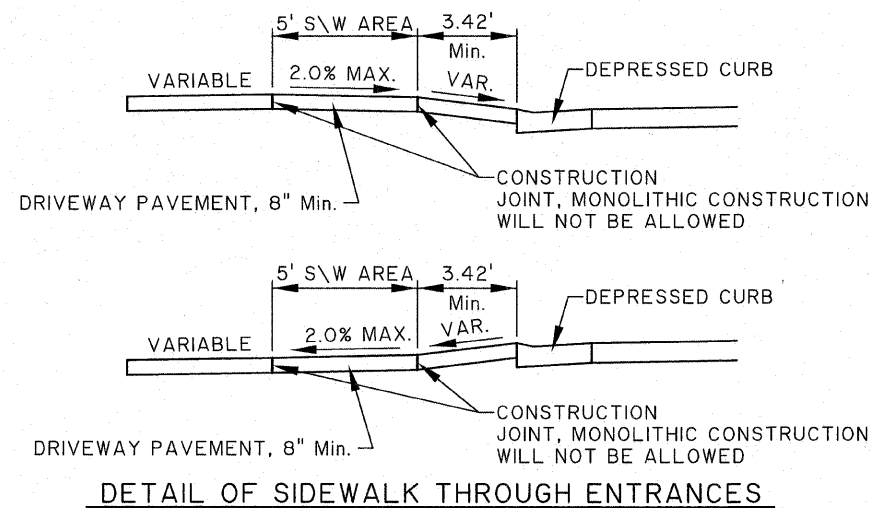

9. DISPOSAL

A. The owner will accept all concrete, asphalt & soil removed from the job. The contractor shall verify the disposal site with the owner. The contractor shall remove from Owner's property and legally dispose of excess excavated material, trash, debris, and waste materials.

LEGEND

○	IRON PIN FOUND
○ 1/4	1/4" IRON PIN FOUND
○ IP	IRON PIPE FOUND
○ N&W	NAIL & WASHER FOUND
○ N	NAIL FOUND
○ PK	PK NAIL FOUND
○ RR	RAILROAD SPIKE FOUND
○ T	"T" FENCE POST FOUND
○ *X	CHISELED "X" IN CONCRETE FOUND
○ DH	DRILLED HOLE IN CONCRETE FOUND
⊙	SURVEY DISC FOUND
⊙	STONE FOUND
⊙	TREE (DECIDUOUS)
⊙	TREE (EVERGREEN)
⊙	FIRE HYDRANT
⊙	WATER METER
— v —	WATER MAIN (EXISTING)
— w —	WATER SERVICE LINE (EXISTING)
⊙	VALVE (GAS OR WATER)
⊙	GAS METER
— g —	GAS MAIN (EXISTING)
— g —	GAS SERVICE LINE (EXISTING)
□ C	CABLE TV PEDESTAL
— CT —	UNDERGROUND CABLE TV (EXISTING)
□ T	TELEPHONE PEDESTAL
⊙	TELEPHONE MANHOLE
— T —	TELEPHONE CABLE (EXISTING)
— t —	TELEPHONE SERVICE WIRE (EXISTING)
⊙	POWER POLE
⊙	POWER POLE w/LIGHT
⊙	GUY ANCHOR
⊙	LIGHTPOLE (EXISTING)
⊙	STREET & SIDEWALK LIGHT POLE (PROPOSED)
⊙	SIDEWALK LIGHT (PROPOSED)
⊙	ELECTRIC PEDESTAL
— DHE —	OVERHEAD ELECTRIC (EXISTING)
— E —	UNDERGROUND ELECTRIC (EXISTING)
L/S	LANDSCAPING
○	FENCE POST
— X — X — X —	FENCE

MILANO & GRUNLOH ENGINEERS, LLC
14 WEST WASHINGTON
P.O. BOX 897
EFFINGHAM, ILLINOIS 62401
PHONE: (217) 347-7262
(800) 677-2714
FAX #: (217) 342-3433

GENERAL NOTES
SIDEWALK ENHANCEMENT
CITY OF SULLIVAN

File name: S:\DWG\06\06244\dwg\Title Sht.dwg
Plot date: 09/13/07 at 16:20