



JOINT REPAIR DETAILS

S.N. 010-0254

(EAST & WEST ABUTMENT JOINTS)

Proposed Improvements

1. Remove existing Neoprene Expansion Joint
2. Place Polymer Concrete Nosing
3. Place Backer Rod
4. Place Silicone Joint Sealer

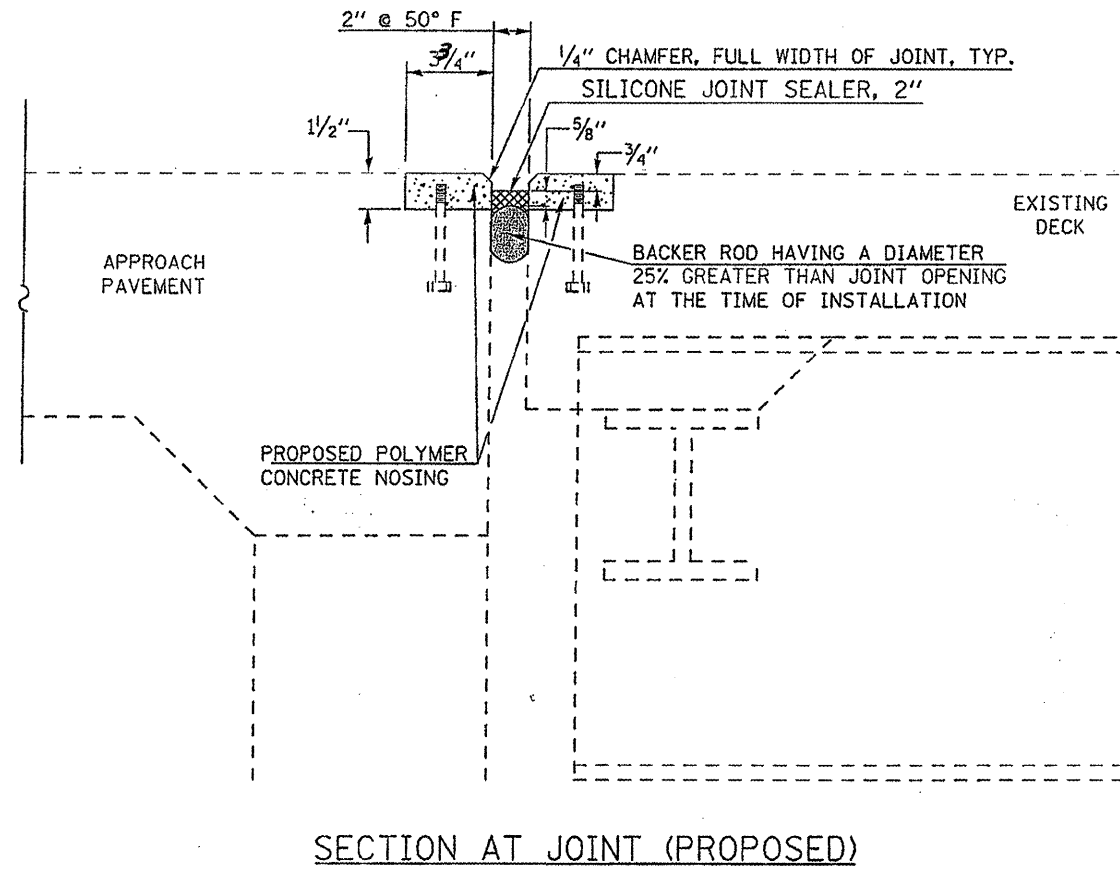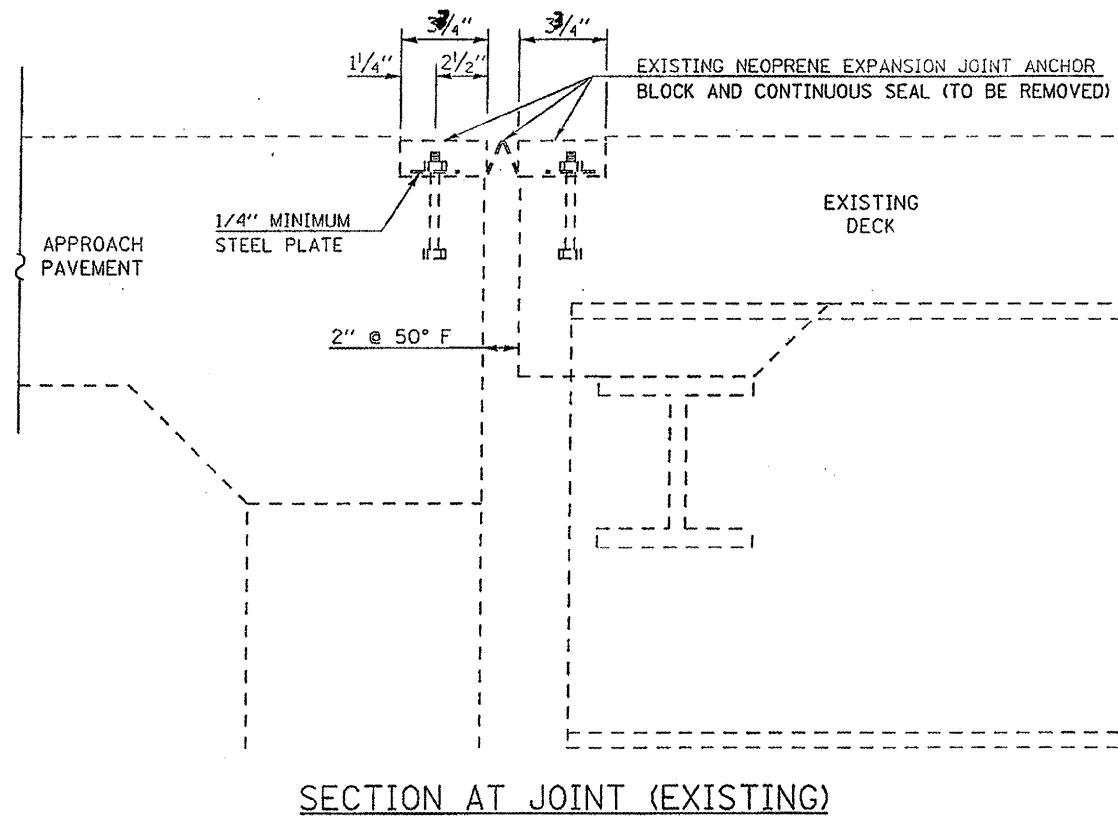

General Notes

Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit bid price for the work.

Removal of the existing Neoprene Expansion Joint shall be included with the cost of SILICONE JOINT SEALER and POLYMER CONCRETE.

BILL OF MATERIALS

Item	Unit	Total
Silicone Joint Sealer, 2"	Foot	215.0
Polymer Concrete	Cu. Ft.	16.8

FILE NAME *	USER NAME * #USERS*	DESIGNED - R. CARROLL	REVISED -
#FILE#		DRAWN - R. CARROLL	REVISED -
	PLOT SCALE * #SCALE*	CHECKED -	REVISED -
	PLOT DATE * #DATE*	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

JOINT REPAIR DETAILS
S.N. 010-0254

SCALE: SHEET NO. 1 OF 6 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-34, 10-35)RS-2(SB)	CHAMPAIGN	66	50
ILLINOIS FED. AID PROJECT			CONTRACT NO. 70923	