




REPAIR DESCRIPTIONS

REPAIR 3555 - REMOVE THE EXISTING CASTING AND LID OF MANHOLE ESAN-5 AND REPLACE IT WITH NEW, WATERPROOF-TYPE CASTING AND LID. CAREFULLY REMOVE ANY LOOSE BRICKS BELOW THE EXISTING CASTING AND LID AND REPLACE THEM WITH ADJUSTING RINGS IN ACCORDANCE WITH GPSD SPECIFICATIONS. ADDITIONALLY, REMOVE AND REPLACE BENCH AND TROUGH OF THE SAME.

LOCATION	SANITARY SCHEDULE	
	X8025602	X8028000
	MANHOLES TO BE ADJUSTED WITH FRAME AND GRATE (SPECIAL) EACH	MANHOLES TO BE RECONSTRUCTED (SPECIAL) EACH
REPAIR 3555	1	1
TOTAL	1	1

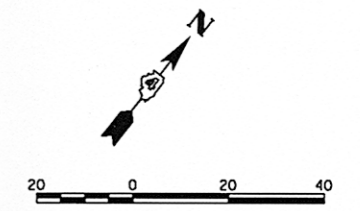

FILE NAME =	USER NAME = kovan01511	DESIGNED - PWM	REVISED -
ac:\pwise_work\do_not_delete\dms73308\042\0155-shr-san002.dgn		DRAWN - RLA	REVISED -
	PLOT SCALE = 3/8" = 1' in.	CHECKED - CAL	REVISED -
	PLOT DATE = 07/23/2012	DATE - 7/18/12	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**ADAMS STREET AND JEFFERSON AVENUE
SANITARY SEWER PLANS**

SCALE: 1"=20' SHEET NO. OF SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
66	12-00356-01-PV	PEORIA	519	211
CONTRACT NO.89626				
ILLINOIS FED. AID PROJECT TIG-50931581				

