


MODEL: det 3 - details  
 FILE NAME: p:\illinois\paw.bentley.com\PI\DOT\Documents\DOT Offices\Dirlet. 3\Projects\3-Darcy Details\03 Detail Revisions 2023\700-799 WORK\_ZONE - SIGNING - PAVEMENT MARKING.dgn

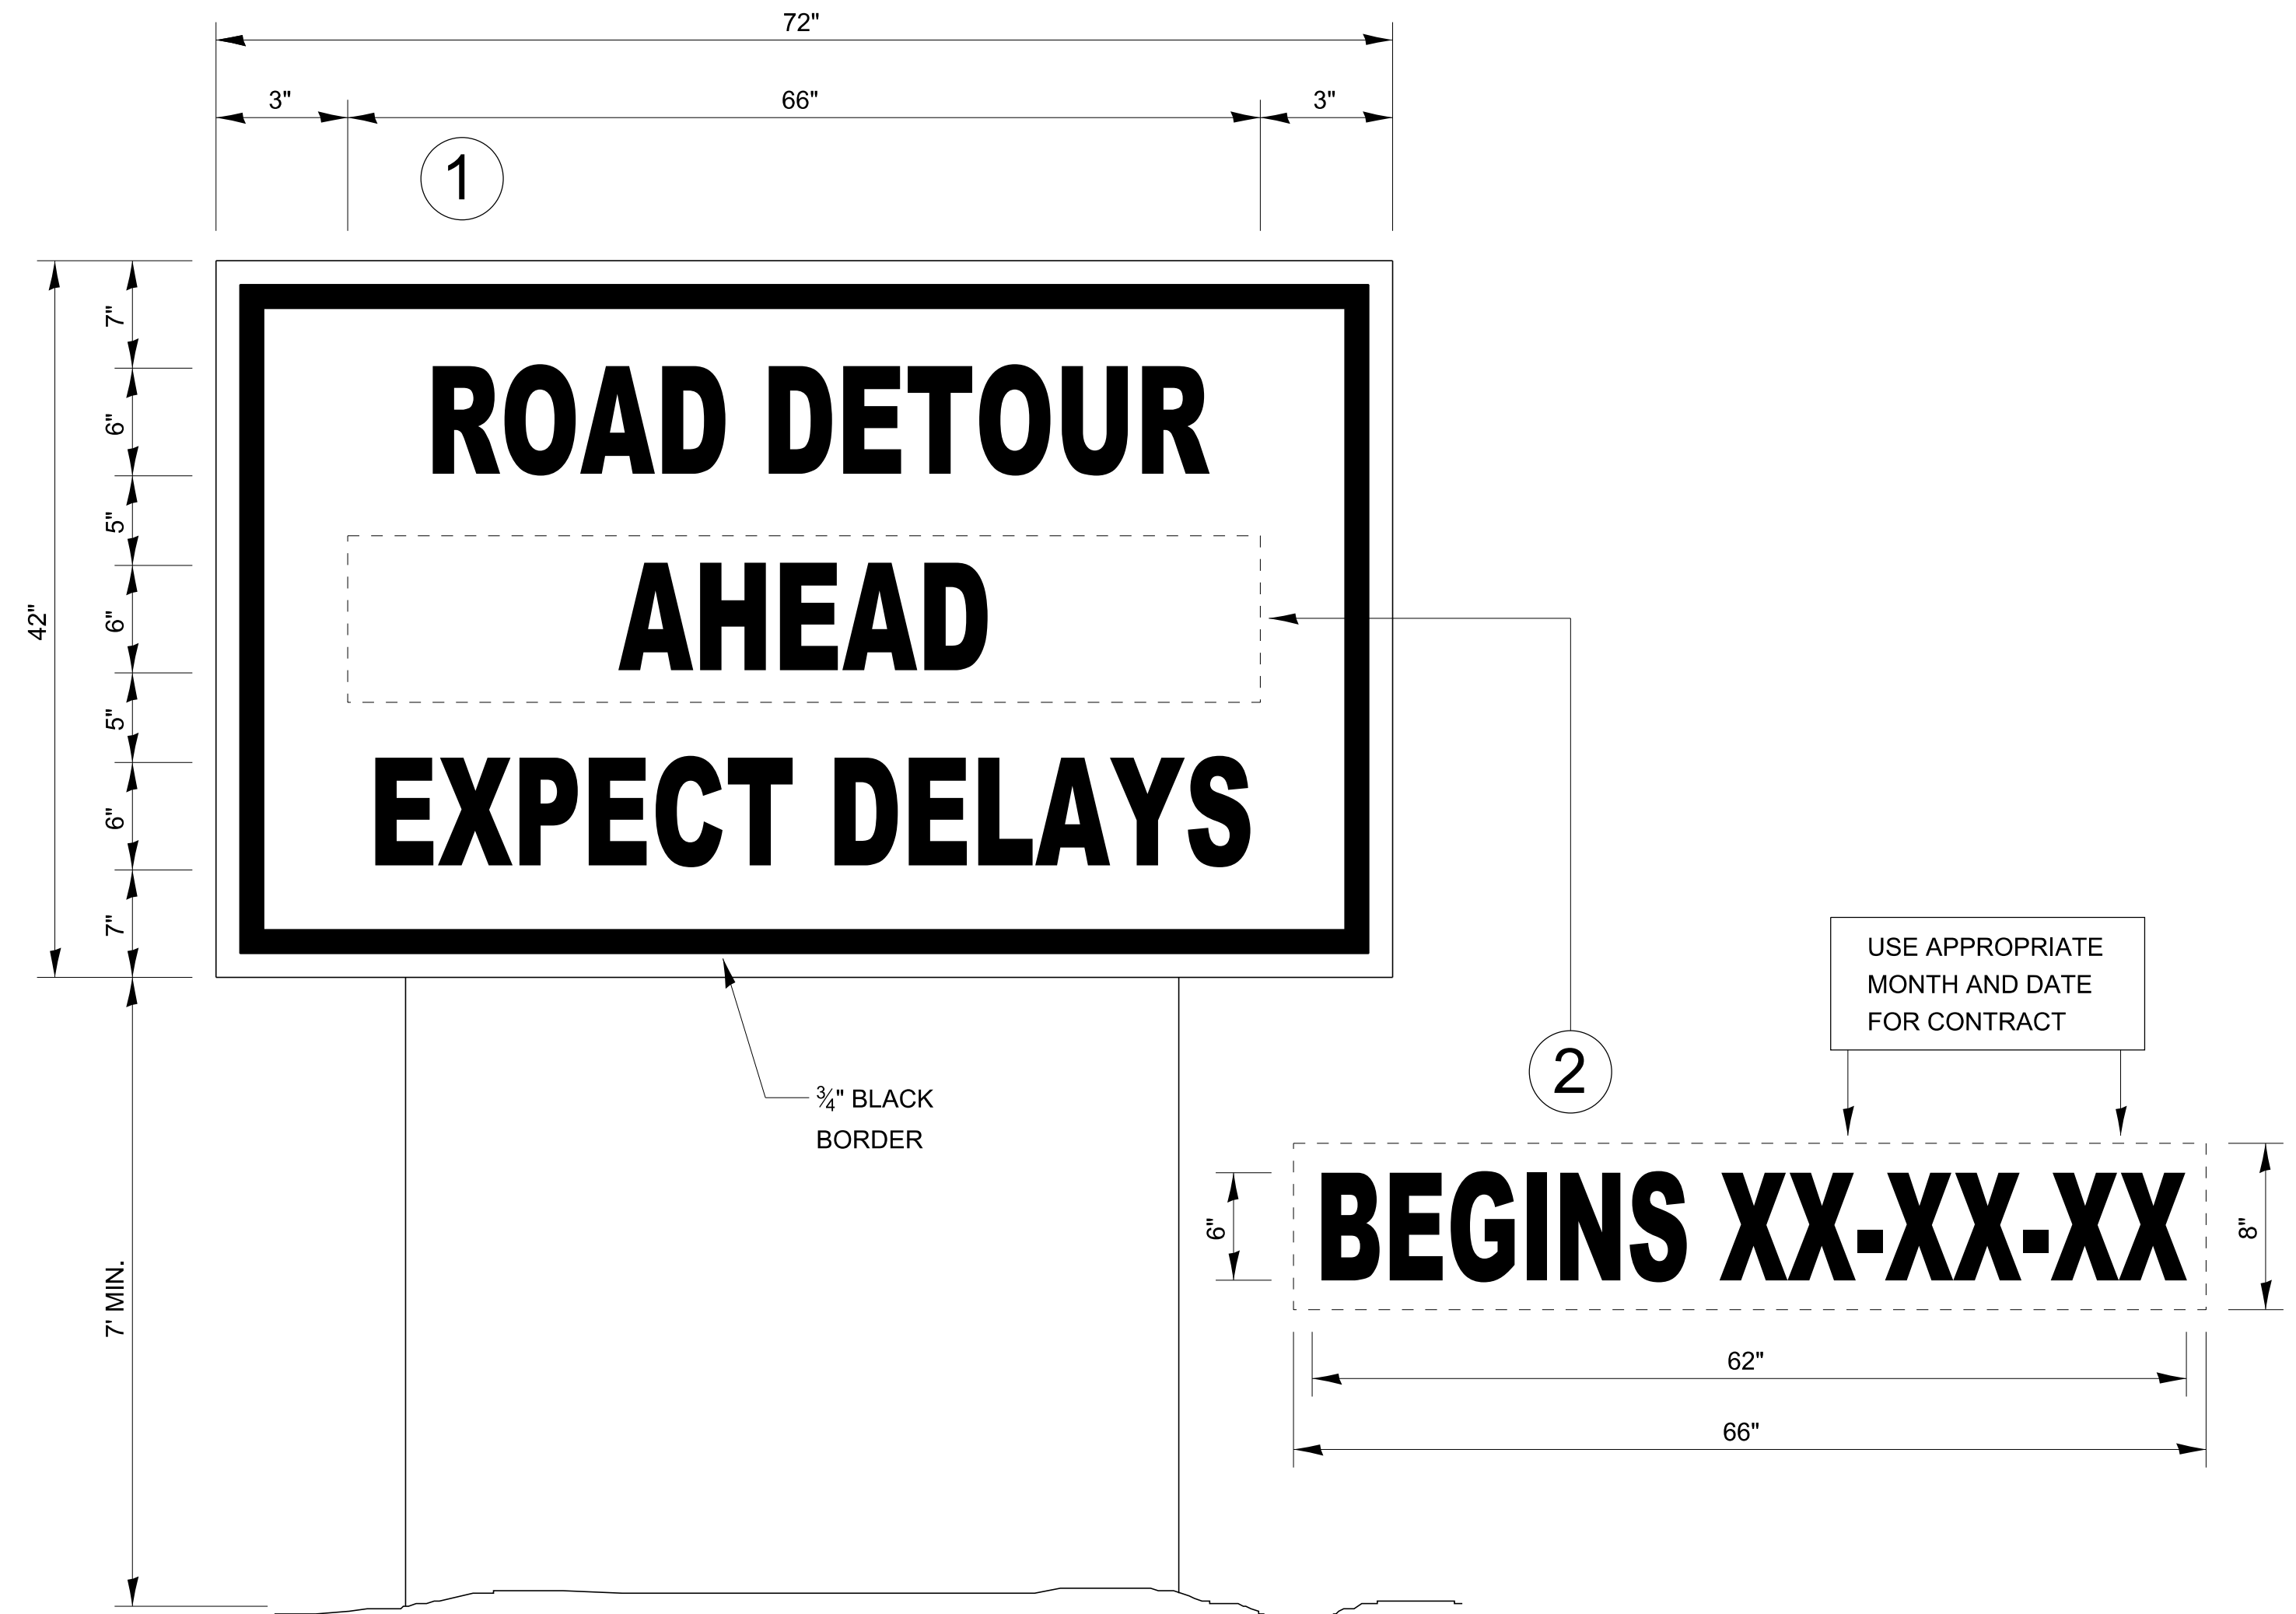

## TEMPORARY INFORMATION SIGNING

### NOTES:

- USE 6" D BLACK LETTERING ON FLUORESCENT ORANGE BACKGROUND.
- ERECT SIGNS AT LOCATIONS IN ADVANCE OF THE "ROAD CONSTRUCTION AHEAD" SIGNS AS DIRECTED BY THE ENGINEER.
- ERECT SIGN ① WITH INSTALLED PANEL ② A MINIMUM OF ONE WEEK PRIOR TO THE START OF THE DETOUR.
- REMOVE PANEL ② ON THAT DATE.
- SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- WILL BE PAID FOR PER SQ FT AS "TEMPORARY INFORMATION SIGNING". EACH SIGN = 21 SQ FT AND THE DATE PANEL ② WILL NOT BE MEASURED SEPARATELY FOR PAYMENT.

720-9

USER NAME = anthony.grunstad	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 50,000 ' / in.	DRAWN -	REVISED -								CONTRACT NO.				
PLOT DATE = 10/6/23	CHECKED -	REVISED -								ILLINOIS FED. AID PROJECT				
	DATE -	REVISED -												