
TRUSS UNIT TABLE

Structure		Design	Exterior Units (2)			Interior Unit				Upper & Lower Chord		Verticals; Horizontals; Vertical, Horizontal, and Interior Diagonals		Camber	Splicing Flange					
Number	Station	Truss Type	No. Panels per Unit	Unit	Panel	No.	No. Panels per Unit	Unit Lgth.(L ₁)	Panel		Wall	O.D.		Midspan	Bolt No./Splice		Weld W	Sizes Wı	A	В
8S0601055L017.2	840 + 00	II-A	5	29'-2"			per dilli	23'-01"			5/16"	3"	Wall 5/16*	2"	6	7/8"			9 1/4"	12 1/4
850825003L004.4	321 + 34	II-A	5	27'-1"	5'-0 1/2"	1	6	31'-6"	5'-0 1/2"	5 l/2"	5/16*	3"	5/16*	2 1/4"	6	7/8"	3/8"	1/4"	9 1/4"	12 1/4
8S060I055L018.3	1341 + 00	II-A	7	35′-8 1/2°	4'-10"					5 1/2*	5/16"	3"	5/16"	1 1/2"	6	7/8"	3/8"	1/4"	9 1/4"	12 1/4
<u> </u>		<u> </u>									<u> </u>					***************************************	 	 		

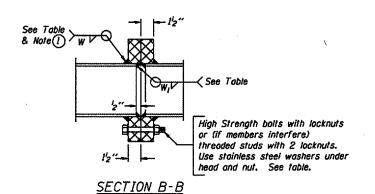


(1) Splicing Flanges shall be attached to each truss unit with the truss shop assembled to camber shown. Truss units shall be in proper alignment and flange surfaces shall be shop bolted into full contact before welding. Sufficient external welds or tacks shall be made to secure flanges until remaining welds are made after disassembly. Adjacent flanges shall be "match marked" to insure proper field assembly.


	 - 1	
·····	 	~~~~

ſ	1
DESIGNED -	
CHECKED -	EXAMINED
DRAWN -	ENGINEER OF MICCE DESIGN PASSED
CHECKED -	ENGINEER OF ENIDORS AND STRUCTURES


7/01/2006

054-A-2

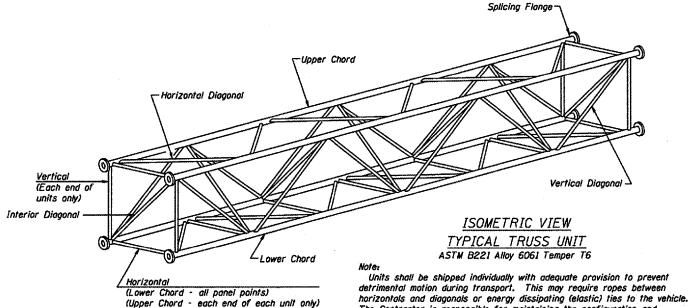


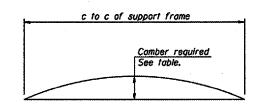


CAMBER DIAGRAM Camber curve shown is theoretical. Actual camber attained by slope changes at splices between units.

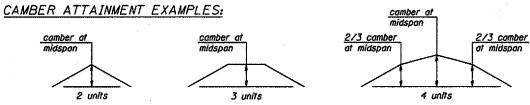

Camber shown is for fabrication only, measured with truss fully supported. (No-load condition)



TRUSS TYPES I-A. II-A. & III-A



TRUSS TYPES II-A & III-A SPLICING FLANGES ASTM B221, Alloy 6061-T6 or ASTM B209, Alloy 6061-T651 "To fit O.D. of Chord with maximum gap of 16".

OVERHEAD SIGN STRUCTURES ALUMINUM TRUSS DETAILS FOR TRUSS TYPES I-A, II-A AND III-A

> District 8 Overhead Sign Structure Repair and Replacement

Rev

The Contractor is responsible for maintaining the configuration and

protection of the units.