SIGN DETAIL

1:75

WB-TR-26
STA. 290+40

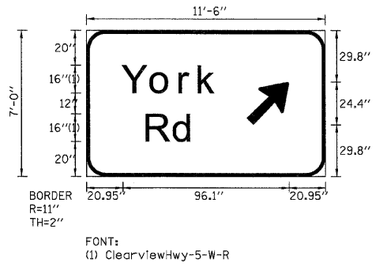

SIGN NUMBER	name	
WIDTH x HGHT.	11'-6" x 7'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	11"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	92.6	29.8	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																								LENGTH	SERIES/SIZE
Y	o	r	k																																						ClearviewHwy-5-W-R
20.9	37.5	54.3	65.3																																					55.6	16/13
R	d																																								ClearviewHwy-5-W-R
35.1	50.8																																							27.3	16/13

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Valemont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS		
$FILEL$	DRAWN - SEW	REVISED -					
USER NAME = $USER$	CHECKED - FML	REVISED -					
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -			SCALE: N.T.S.	SHEET NO. 23 OF 58 SHEETS	STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	351
		CONTRACT NO. 60I57		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		