





LEGEND

	WORK AREA
	BARREL WITH STEADY BURN LIGHT
	TEMPORARY TRAFFIC CONTROL SIGN(S) (OF TYPE(S) SPECIFIED)
	PORTABLE CHANGEABLE MESSAGE SIGN



CONSTRUCTION STAGING:

USE PORTABLE CHANGEABLE MESSAGE SIGNS (PCMS) TO GIVE 1 WEEK ADVANCE NOTICE TO PUBLIC THAT INTERSECTION WILL OPERATE AS A ROUNDABOUT BY USING MESSAGE: MESSAGE 1 MESSAGE 2

	ROUND-ABOUT COMING	DAY DATE TIME
INSTALL PERMANENT W10-1 & R8-8 SIGNS		
INSTALL & COVER PERMANENT W2-6/W16-12 SIGNS		
INSTALL & COVER TEMPORARY R2-1, R4-7 & R6-1R SIGNS		
USE BARRELS TO CONVERT INTERSECTION ACTION FROM TWO-WAY STOP TO ROUNDABOUT & UNCOVER ROUNDABOUT SIGNS		
CHANGE PCMS MESSAGE TO:	MESSAGE 1	MESSAGE 2
	ROUND-ABOUT AHEAD	YIELD TO CIRCLE TRAFFIC
FULL-DEPTH SAWCUT FOR SPLITTER ISLANDS AND CENTRAL ISLAND		
REMOVE EXISTING PAVEMENT FOR SPLITTER ISLAND CONSTRUCTION		
CONSTRUCT SPLITTER ISLANDS		
REMOVE EXISTING PAVEMENT FOR CENTRAL ISLAND & TRUCK APRON CONSTRUCTION		
CONSTRUCT CENTRAL ISLAND INCLUDING TOPSOIL		
CONSTRUCT TRUCK APRON AND MOUNTABLE CURB		
INSTALL PERMANENT ROUNDABOUT SIGNS IN ISLANDS & REMOVE REDUNDANT TEMPORARY SIGNS		

TRAFFIC CONTROL PAYMENT:

TRAFFIC CONTROL SHOWN ON THIS SHEET TO BE PAID FOR AS TRAFFIC CONTROL - STAGE II

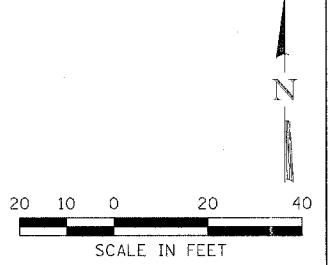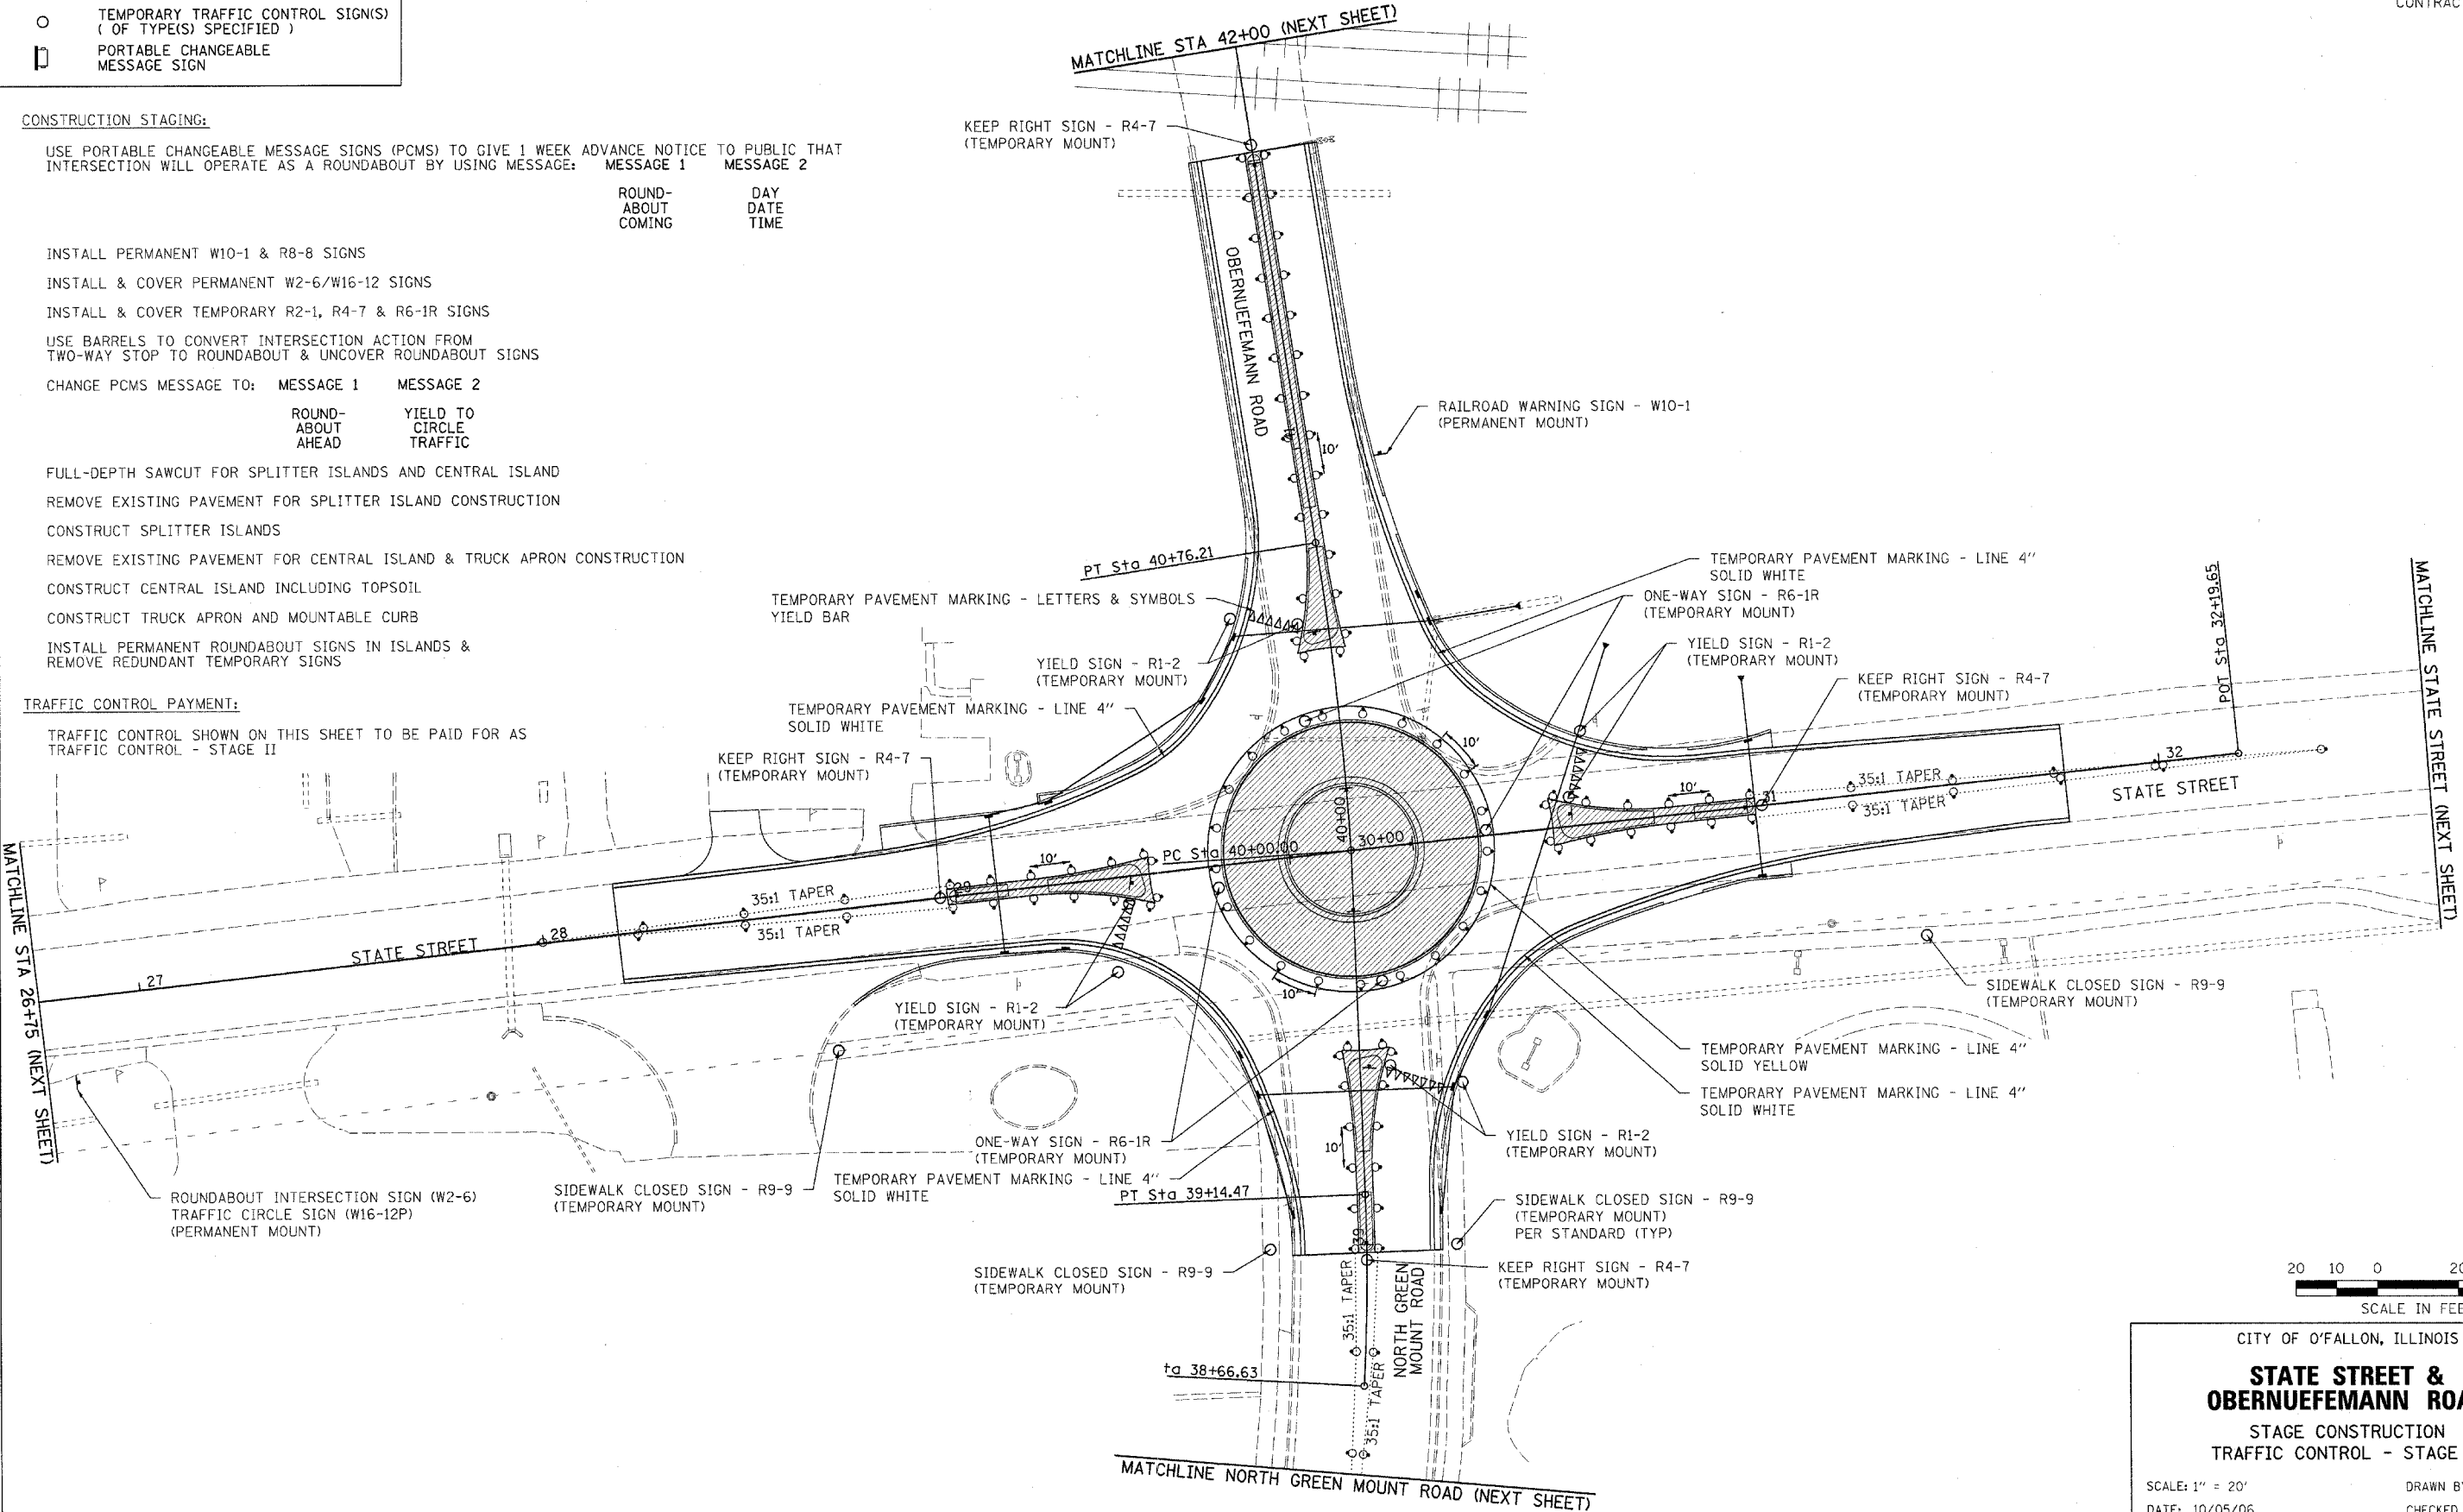

CITY OF O'FALLON, ILLINOIS

STATE STREET & OBERNUEFEMANN ROAD

STAGE CONSTRUCTION
 TRAFFIC CONTROL - STAGE II

SCALE: 1" = 20'
 DATE: 10/05/06

DRAWN BY: BDS
 CHECKED BY: TJM

Plot Date: 10/27/2006
 Plot Time: 12:55:57 AM
 File Name: S:\05046\CAD\Construction\Plan\Stages.dgn