SIGN DETAIL
TEMP_SIGN – 4

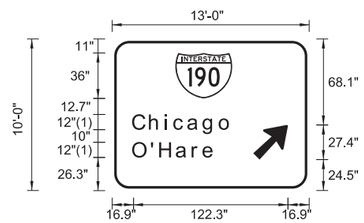

SIGN NUMBER	Temp_Sign – 4
WIDTH x HGHT.	13'–0" x 10'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	50	73	45	36
AR_Type A	315	111.7	24.5	22.1	34.8

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																					LENGTH	SERIES/SIZE
C	h	i	c	a	g	o																ClearviewHwy–5–W
16.9	30.3	42.9	49.5	60.4	72.7	85.5															77.9	12/9.8
O	'	H	a	r	e																	ClearviewHwy–5–W
16.9	31.6	38.2	51.3	64.1	72.6																64.6	12/9.8

SIGN DETAIL
TEMP_SIGN – 5

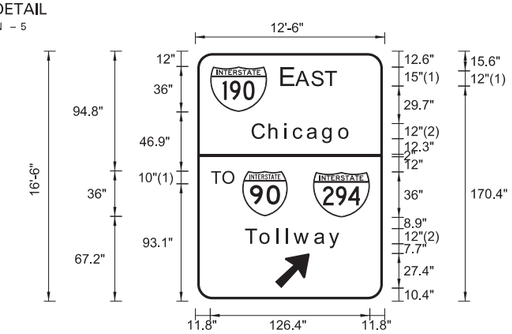

SIGN NUMBER	Temp_Sign – 5
WIDTH x HGHT.	12'–6" x 16'–6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	11.8	150	45	36
M1_1	0	37.1	67.2	36	36
M1_1	0	93.2	66.4	45	36
AR_Type A	315	63.1	10.4	22.1	34.8

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																					LENGTH	SERIES/SIZE
E	A	S	T																			ClearviewHwy–4–W
68.4	80	92.6	103.3																		43	15,12
C	h	i	c	a	g	o																ClearviewHwy–5–W
45.7	59.1	71.7	78.3	89.3	101.5	114.3															77.9	12/9.8
T	O																					ClearviewHwy–4–W
13.1	22.1																				17.7	10
T	o	l	l	w	a	y																ClearviewHwy–5–W
40.3	51.9	65.3	72.7	78.8	95.2	106.5															75.6	12/9.8

TIS–03

..\D160G37-MOT-GUIDESIGN.DGN,..\D160G37-BORDERT.DGN
10-18-2012,13:28:22 BAJZEKKJ F:\DOC_EXP\CH1-#0012584-02\COMMON\PSET\TEMPSHEETPLOT\D160G37-SHT-TEMPINFSIGN.3.DGN

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - MAM	REVISED -
		DRAWN - MAM	REVISED -
TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - KDA	REVISED -
	PLOT DATE = $DATE$	DATE - 10/19/12	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY INFORMATION SIGN
MANNHEIM ROAD

SCALE: N.T.S. | SHEET NO. OF SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	0105 WRS&HB	COOK	605	165
		CONTRACT NO. 60G37		
	ILLINOIS	FED. AID PROJECT		