SIGN DETAIL
TEMP_SIGN – 10



SIGN NUMBER	Temp_Sign – 10
WIDTH x HGHT.	10'–0" x 8'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
AR_Type A	315	47.4	13	22.1	34.8

FONT:
(1) ClearviewHwy-5-W

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																					LENGTH	SERIES/SIZE
B	A	L	M	O	R	A	L															ClearviewHwy–5–W
9.3	21.3	36.1	47	62.3	77.8	89.6	104.4														102.1	12
A	V	E																				ClearviewHwy–5–W
36.1	49.6	63.2																			34.7	12

SIGN DETAIL
TEMP_SIGN – 11

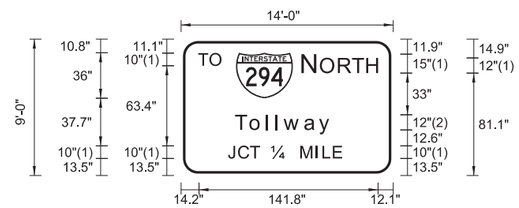

SIGN NUMBER	Temp_Sign – 11
WIDTH x HGHT.	14'–0" x 9'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	43.5	61.2	45	36

FONT:
(1) ClearviewHwy-4-W
(2) ClearviewHwy-5-W

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																					LENGTH	SERIES/SIZE
T	O																					ClearviewHwy–4–W
14.2	23.2																				17.7	10
N	O	R	T	H																		ClearviewHwy–4–W
96.4	110.8	125.1	136.1	147.4																	59.6	15,12
T	o	l	l	w	a	y																ClearviewHwy–5–W
43.6	55.3	68.7	76.1	82.2	98.6	109.9															75.6	12⁄9.8
J	C	T																				ClearviewHwy–4–W
37.7	45.8	55.2																			24.2	10
14																						ClearviewHwy–4–W
71.9																					13.2	10
M	l	L	E																			ClearviewHwy–4–W
95.2	107.4	112.8	120.9																		31.6	10

TIS–06

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - MAM	REVISED -
		DRAWN - MAM	REVISED -
TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - KDA	REVISED -
	PLOT DATE = $DATE$	DATE - 10/19/12	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY INFORMATION SIGN
MANNHEIM ROAD

SCALE: N.T.S. | SHEET NO. OF SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	0105 WRS&HB	COOK	605	168
		CONTRACT NO. 60G37		
	ILLINOIS FED. AID PROJECT			

..\D160G37-NOT-GUIDESIGN.DGN, ..\D160G37-BORDERT.DGN
10-18-2012,13:28:24 BHJZEKJ F:\DOC_EXP\CH-2008125984-02\COMMON\PSET\TEMPSHEETPLOT\D160G37-SHT-TEMPINFSIGN-6.DGN