| 1 | ROUTE   | SECTION    | COUNTY  | TOTAL<br>SHEETS | SHEET<br>NUMBER |
|---|---------|------------|---------|-----------------|-----------------|
| Ì | VARIOUS | 2006-018BP | VARIOUS | 27              | 3               |

Contract 60B43

## **GENERAL NOTES FOR PAINT**

CLEANING AND PAINTING OF THE EXISTING STRUCTURAL STEEL SHALL BE AS SPECIFIED IN THE SPECIAL PROVISION FOR "CLEANING AND PAINTING EXISTING STEEL STRUCTURES".


LOCATIONS 1, 2 AND 3 CONTAIN LEAD PAINT. A MINIMUM OF FOUR (4) [AT LOCATION 1] AND TWO (2) [AT LOCATIONS 2 & 3] AIR MONITORS WILL BE REQUIRED TO MONITOR ABRASIVE BLASTING OPERATIONS PER LOCATION, SEE SPECIAL PROVISIONS FOR CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUE. LOCATIONS 4, 5 & 6, DO NOT CONTAIN LEAD PAINT. CONTAINMENT SHALL BE IN ACCORDANCE WITH THE SPECIAL PROVISION "CONTAINMENT AND DISPOSAL OF NON-LEAD PAINT CLEANING RESIDUES".

THE SSPC-QP1 AND SSPC-QP2 PAINTING CONTRACTOR CERTIFICATIONS WILL NOT BE REQUIRED FOR THESE BRIDGES.

THE AREAS DESIGNATED TO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10 SHALL BE PAINTED ACCORDING TO THE REQUIREMENTS OF PAINT SYSTEM 1 -OZ/E/U. THE COLOR OF THE FINAL FINISH COAT FOR ALL INTERIOR STEEL SURFACES SHALL BE GRAY, MUNSELL NO 5B 7/1. THE COLOR OF THE FINAL FINISH COAT FOR THE EXTERIOR AND BOTTOM FLANGE OF THE FASCIA BEAMS SHALL BE REDDISH BROWN, MUNSELL NO 2.5YR 3/4.

ALL ITEMS (SUCH AS, BUT NOT LIMITED TO; CONDUITS, BRACKETS AND DECK DRAINS) ATTACHED TO THE OUTSIDE OF THE FASCIA BEAMS SHOULD BE CLEANED AND PAINTED.

## **FASCIA BEAM PAINTING DETAIL**

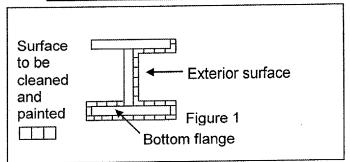

**LOCATIONS 1,2,4,5,AND 6** 

ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., TEN (10) FT. AT LOCATION 4 (SN 056-0059), (MEASURED ALONG THE BEAM) OF EITHER SIDE OF THE DECK JOINTS INCLUDING JOINTS AT PIN & LINKS ON LOCATION 2 (SN 023-0106), SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL ALSO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOCATION 3

THE EXTERIOR SURFACE AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FACIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP 10.

ILLINOIS DEPARTMENT OF TRANSPORTATION

**GENERAL PAINT NOTES** 

A REV. 2-27-07