NOTE: DISTANCES SHALL BE PROVIDED BY IDOT DISTRICT 4 OPERATIONS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(34-6,55-1)	HANCOCK/ McDONOUGH	433	248
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STATE CONTRACT NO. 68206

SIGN DETAIL

1:10

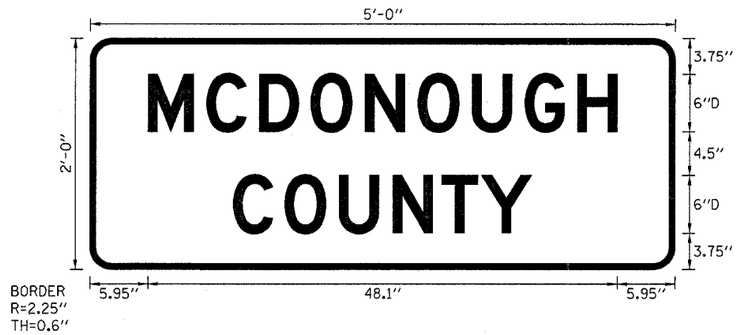

SIGN NUMBER	I1-I104	
WIDTH x HGHT.	5'-0" x 2'-0"	
BORDER WIDTH	0.6"	
CORNER RADIUS	2.25"	
MOUNTING	Ground	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/Pure White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: I1-I104.ssi

Dimensions are in inches.tenths

Letter spacings are to start of next letter

LETTER POSITIONS (X)

																																							LENGTH	SERIES/SIZE
	M	C	D	O	N	O	U	G	H																															D 2000
5.9	6	5.4	5.3	5.6	5.4	5.6	5.4	5.4	4.1	5.9																													48.1	6
	C	O	U	N	T	Y																																		D 2000
14.7	5.3	5.6	5.5	5	4.1	5.2	14.7																																30.6	6

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGN PANEL STANDARDS

SHEET 9 OF 14

SCALE: VERT. N/A HORIZ. N/A

DATE 6/21/04

DRAWN BY BDS

CHECKED BY SRD

Plot Date: 7/19/2006
Plot Time: 8:27:11 AM
Plotted By: bsmith
Pen Table: tidot.tbl
Filename: I:\03033\Cad\T\Construction_Plans\233_Details\SignPanel.dgn