


STG 2

CONTRACT NO. 94771

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
855	118-1	WHITE	25	10
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

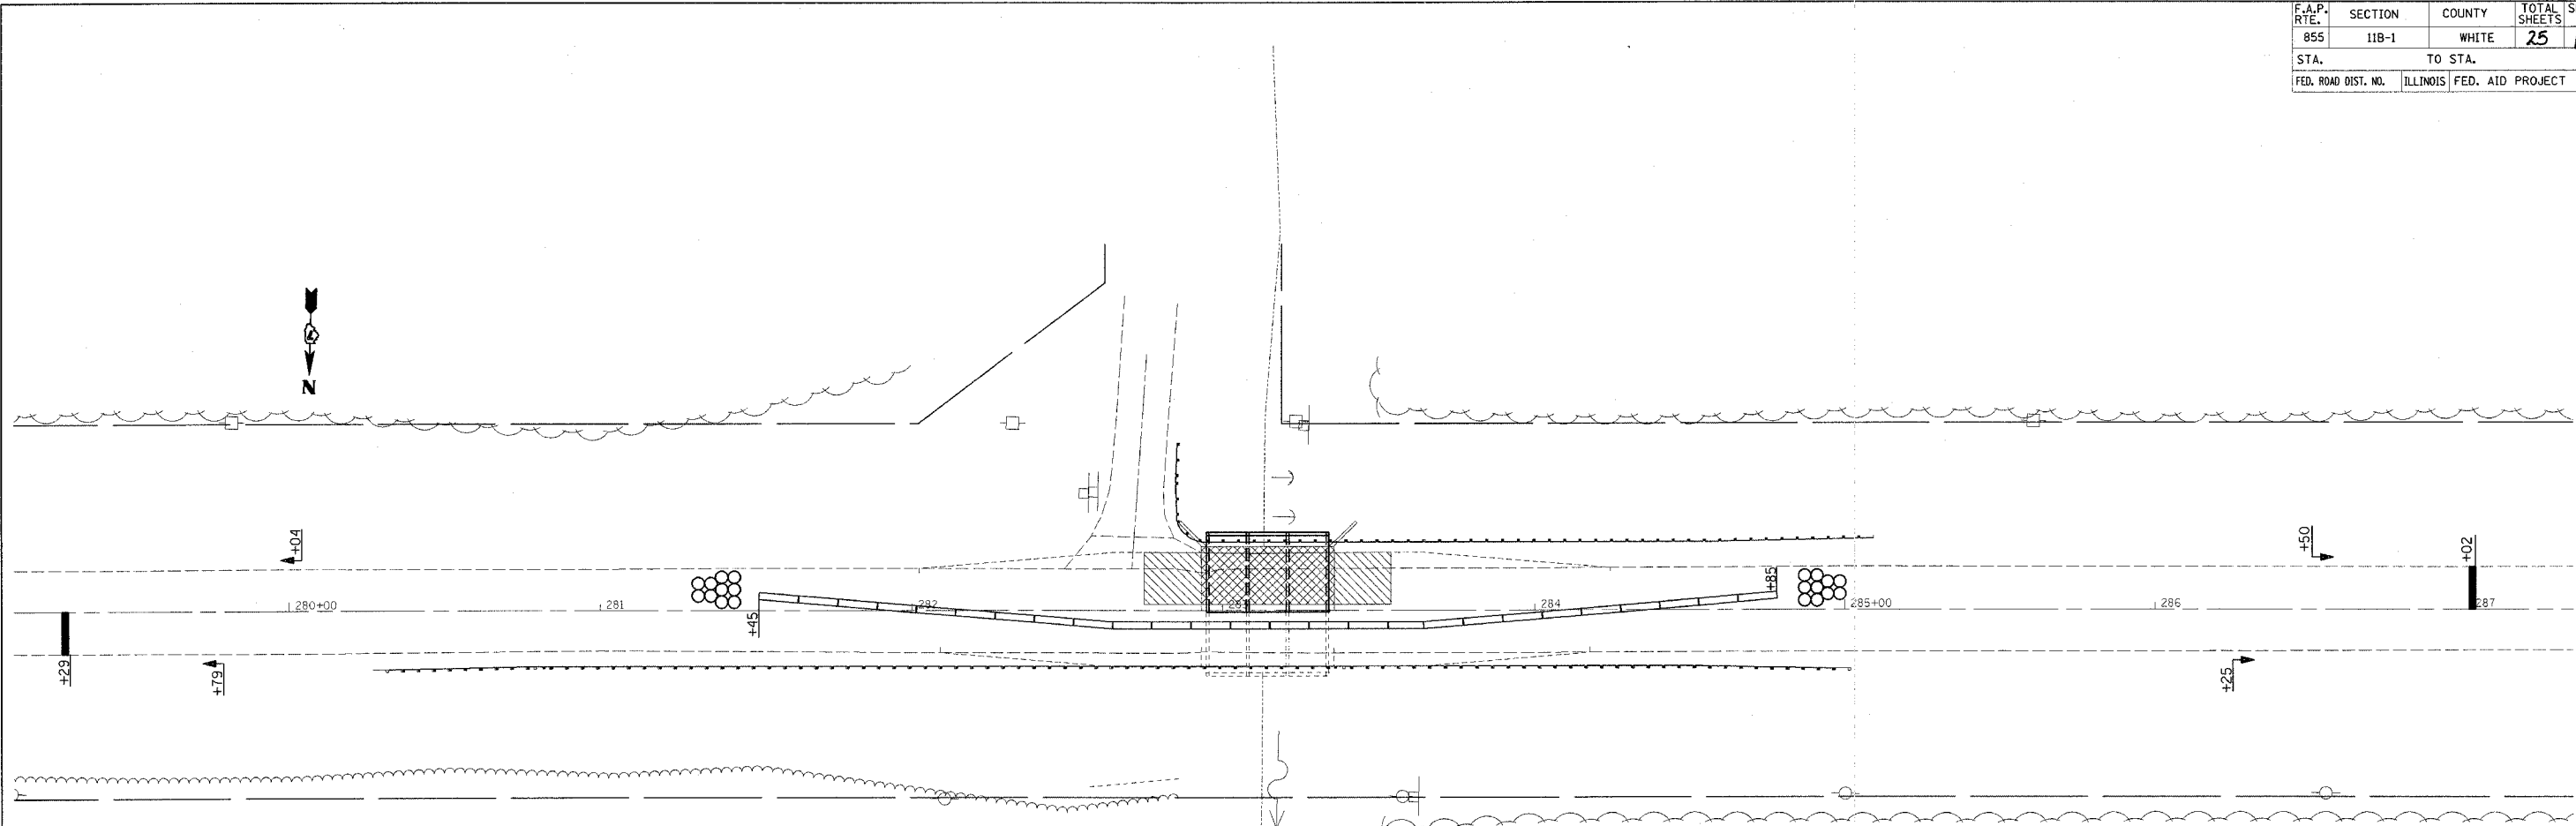

STAGE II

1. RELOCATE TEMPORARY CONCRETE BARRIERS, SIGNS, ECT. ACCORDING TO TRAFFIC CONTROL STANDARD 701321 AND PLACE TEMPORARY PAVEMENT MARKING TO ALLOW FOR A 12 FOOT DRIVING LANE.
2. REMOVE STAGE II PORTION OF THE EXISTING STRUCTURE, PAVEMENT, AND GUARDRAIL.
3. CONSTRUCT STAGE II PORTION OF THE NEW BOX CULVERT.
4. CONSTRUCT STAGE II PORTION OF THE NEW PAVEMENT, BASE COURSE WIDENING, AND SHOULDERS.
5. REMOVE TRAFFIC CONTROL STANDARD 701321 AND BLR 21.
6. CONSTRUCT SEEDING, MULCH, AND TEMPORARY DITCH CHECKS ON STAGE II CONSTRUCTION SIDE.

BASE COURSE WIDENING

282+74.82 TO 282+93.26	13.32 SQ YD
282+93.26 TO 283+35.95	23.72 SQ YD
283+35.95 TO 283+54.16	13.15 SQ YD
TOTAL =	50.00 SQ YD

PAVEMENT REMOVAL

282+74.82 TO 282+93.26	33.81 SQ YD
283+35.95 TO 283+54.16	33.38 SQ YD
TOTAL =	67.00 SQ YD

AGGREGATE SHOULDERS, TYPE B

282+84.25 TO 282+94.82	5.67 TON
282+94.82 TO 283+34.16	5.23 TON
282+94.82 TO 283+34.16	5.08 TON
283+34.16 TO 285+09.24	44.18 TON
TOTAL =	60.00 TON

SUB-BASE GRANULAR MATERIAL, TYPE B

282+74.82 TO 282+94.82	22.78 TON
282+94.82 TO 283+34.16	5.53 TON
283+34.16 TO 283+54.16	22.78 TON
TOTAL =	51.00 TON

BITUMINOUS CONCRETE PAVEMENT(FULL DEPTH), SUPERPAVE, 14"

282+74.82 TO 282+94.82	33.33 SQ YD
282+94.82 TO 283+34.16	72.12 SQ YD
283+34.16 TO 283+54.16	33.33 SQ YD
TOTAL =	139.00 SQ YD

BITUMINOUS MATERIALS (PRIME COAT)

282+64.82 TO 282+74.82	2.39 GALLON
282+74.82 TO 282+94.82	6.67 GALLON
282+94.82 TO 283+34.16	14.42 GALLON
283+34.16 TO 283+54.16	6.67 GALLON
TOTAL =	30.00 GALLON

BITUMINOUS SURFACE REMOVAL - BUTT JOINT

282+64.82 TO 282+74.82	23.89 SQ YD
TR 600E	24.44 SQ YD
TOTAL =	48.00 SQ YD

BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N70

282+64.82 TO 282+74.82	2.68 TON
TOTAL =	3.00 TON

INCIDENTAL BITUMINOUS SURFACING, SUPERPAVE, N50

TR 600E	6.48 TON
TOTAL =	7.00 TON

- STRUCTURE REMOVAL
- PAVEMENT REMOVAL

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**S.N. 097-2013  
STAGE 2 CONSTRUCTION**

SCALE: VERT.  
HORIZ.  
DATE

DRAWN BY  
CHECKED BY

PLOT DATE = 10/05/2005  
PLOT NAME = STG2  
PLOT SCALE = 1/8"=1'-0"  
USER NAME = dlatnot