SIGN DETAIL
1:75

WB-BM-48A
STA. 415+40

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 5'-6"
BORDER WIDTH	2"
CORNER RADIUS	9"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: White
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

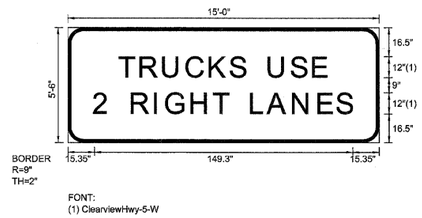

SYMBOL	ROT	X	Y	WID	HT

Panel Style: Regulatory_Signs.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
T	R	U	C	K	S		U	S	E																														ClearviewHwy-5-W
30.2	42.4	55.5	69.1	82.5	94.4	103	116.5	129.6	142.2																													119.7	12
2		R	I	G	H	T		L	A	N	E	S																												ClearviewHwy-5-W
15.4	23.6	37.5	50.6	57.2	71.9	84.6	93.3	106.4	115.9	130.6	145.3	156																										149.3	12

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 51 OF 58 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	379
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		