If you plan to submit a bid directly to the Department of Transportation

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later that 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

REQUESTS FOR AUTHORIZATION TO BID

Contractors wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) and the ORIGINAL "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHO CAN BID?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID: Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

ADDENDA AND REVISIONS: It is the contractor's responsibility to determine which, if any, addenda or revisions pertain to any project they may be bidding. Failure to incorporate all relevant addenda or revisions may cause the bid to be declared unacceptable.

Each addendum will be placed with the contract number. Addenda and revisions will also be placed on the Addendum/Revision Checklist and each subscription service subscriber will be notified by e-mail of each addendum and revision issued.

The Internet is the Department's primary way of doing business. The subscription server e-mails are an added courtesy the Department provides. It is suggested that bidders check IDOT's website at http://www.dot.il.gov/desenv/delett.html before submitting final bid information.

IDOT IS NOT RESPONSIBLE FOR ANY E-MAIL FAILURES.

Addenda Questions may be directed to the Contracts Office at (217)782-7806 or D&Econtracts@dot.il.gov

Technical Questions about downloading these files may be directed to Tim Garman (217)524-1642 or Timothy.Garman@illinois.gov.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of plans and proposals	217/782-7806

ADDENDUMS AND REVISIONS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated any addendum and/or revision prior to submitting their bid. Failure by the bidder to include and addendum or revision could result in a bid being rejected as irregular.

101

112131111111111111111111111111111111111
Proposal Submitted By
Name
Address
City

Letting June 12, 2009

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction.

(SEE INSTRUCTIONS ON THE INSIDE OF COVER)

Notice To Bidders, Specifications, **Proposal, Contract** and Contract Bond



Springfield, Illinois 62764

Contract No. 91410 **MCLEAN County** Section 06-00025-01-BT (Chenoa) Route ROUTE 66 BIKE TRAIL **Project ARA-HD-113(029) District 5 Construction Funds**

PLEASE MARK THE APPROPRIATE BOX BELOW:
A Bid Bond is included.
☐ A <u>Cashier's Check</u> or a <u>Certified Check</u> is included

Prepared by

Checked by

NEED NOT RETURN THE ENTIRE PROPOSAI (See instructions inside front cover) **BIDDERS**

INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written Authorization to Bid from IDOT's Central Bureau of Construction. To request authorization, a potential bidder <u>must complete and submit Part B of the Request for Authorization to Bid/or Not For Bid Status form (BDE 124 INT) and submit an original Affidavit of Availability (BC 57).</u>

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial. If a contractor has requested to bid but has not received a Proposal Denial and/or Authorization Form, they should contact the Central Bureau of Construction in advance of the letting date.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

Call

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding

J	
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of CD-ROMS	217/782-7806



PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

1. P	roposal of
•	ayer Identification Number (Mandatory) or the improvement identified and advertised for bids in the Invitation for Bids as:
	Contract No. 91410 MCLEAN County Soction 06 00025 01 RT (Change)

MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds

Project consists of constructing a multi-use bike trail including earth excavation, milling, aggregate base course, HMA shoulders and surface, topsoil excavation and placement, erosion control, seeding, fertilizer, mulch, pavement markings, signing and all other incidental items to complete the work on the Route 66 Bike Trail from TR 3000N to a commercial entrance north of U.S. Route 24 in the city of Chenoa.

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents shall govern performance and payments.

- 3. ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER. The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
- 4. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
- 5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

<u>A</u>	mount o	of Bid	Proposal <u>Guaranty</u>	<u>Am</u>	ount c	Proposal <u>of Bid</u> <u>Guaranty</u>
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000 \$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000 \$150,000
\$10,000	to	\$50,000	\$1,000	\$5,000,000	to	\$7,500,000 \$250,000
\$50,000	to	\$100,000	\$3,000	\$7,500,000	to	\$10,000,000 \$400,000
\$100,000	to	\$150,000	\$5,000	\$10,000,000	to	\$15,000,000 \$500,000
\$150,000	to	\$250,000	\$7,500	\$15,000,000	to	\$20,000,000 \$600,000
\$250,000	to	\$500,000	\$12,500	\$20,000,000	to	\$25,000,000\$700,000
\$500,000	to	\$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000 \$800,000
\$1,000,000	to	\$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000 \$900,000
\$1,500,000	to	\$2,000,000	\$75,000	over		\$35,000,000 \$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted, the proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is	\$(). If this proposal is accepted
and the undersigned shall fail to execute a contract bond as required herein,	it is hereby agreed that the amount of the	e proposal guaranty shall become
the property of the State of Illinois, and shall be considered as payment of da	mages due to delay and other causes suf	fered by the State because of the
failure to execute said contract and contract bond; otherwise, the bid bond s	shall become void or the proposal guaran	ity check shall be returned to the
undersigned.		

undersigned.		
Attach Cashier's	Check or Certif	ied Check Here
In the event that one proposal guaranty check is intended to cover to fithe proposal guaranties which would be required for each individuatate below where it may be found.		
The proposal guaranty check will be found in the proposal for:	Item	
	Section No.	
	County	
1		

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

6. **COMBINATION BIDS.** The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination		Combination Bid
No.	Sections Included in Combination	Dollars Cents

- 7. SCHEDULE OF PRICES. The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices shall govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.
- 8. **CERTIFICATE OF AUTHORITY.** The undersigned bidder, if a business organized under the laws of another State, assures the Department that it will furnish a copy of its certificate of authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish the certificate within the time provided for execution of an awarded contract may be cause for cancellation of the award and forfeiture of the proposal guaranty to the State.

ECMS002 DTGECM03 ECMR003 PAGE RUN DATE - 04/27/09 RUN TIME - 193518 ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 91410

> STATE JOB #- C-95-326-09 PPS NBR - 5-10245-0000

KON LIME - 193518	-HD-0113/029/000 ROUTE ROUTE -HD-0113/029/000 66	BIRE TRAIL	UNIT PRICE TOTAL PRICE DOLLARS CENTS DOLLARS CTS	— II -														
0 + 0	ARA-		QUANTITY	7.000	000'6	295,000	120.000	320.000	85.000	008:0	50.000	2.000	981.000	1.000	591.000	0.0	590.000	15,000
5	CTION NUMBER BT (CHENOA)		UNIT OF MEASURE		i	CO YD	NOL	SQ YD		V	G 1 1 1 1 1 1 1 1 1		F001		NOT	i	GALLON	NOL
	NAME CODE DIST SE SE 113 05 06-00025-01-		PAY ITEM DESCRIPTION	WOOD BOLLARD	CONC PARKING BLOCKS	EARTH EXCAVATION	SUB GRAN MAT B	GEOTECH FAB F/GR STAB	TOPSOIL EXC & PLAC	SEEDING CL 2 SPL	TEMP EROS CONTR SEED	TEMP DITCH CHECKS	PERIMETER EROS BAR	INLET & PIPE PROTECT	AGG BASE CSE B	PCC BASE CSE W 8	BIT MATLS PR CT	MIX CR JTS FLANGEWYS
	COUNTY N		ITEM	X00147	0323378	0200100	0201500	1001000	1101505	5001000	00250	8000300	8000400	8000500	5101400	5400300	0300100	0600400

ECMS002 DTGECM03 ECMR003 PAGE RUN DATE - 04/27/09 RUN TIME - 193518
ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 91410
(CHENOA)
ROUTE 06-00025-01-BT MCLEAN

DOLLARS CENTS PRICE DOLLARS 98,000 1.000 000.9 7.000 123.000 86.000 1.000 5,773.000 297.000 .000 860,000 64.000 5,773.000. 293.000 50.000 QUANTITY UNIT OF MEASURE SQ YD SQ YD SQ YD NOI SQ FT SQ YD CU YD TON FOOT SQ FT EACH EACH FOOT F00T FOOT PAY ITEM DESCRIPTION 3D COMB CURB GUTTER REM DETECTABLE WARNINGS AREA REF CR CON TR FLD TILE JUN VAULT FLD TILE JUN VAULT CONC MED TSM-6 DOW N50 N30 COMB CC&G TB6.24 COMB CC&G TB SPL STORM SEWER SPEC PROTECTIVE COAT MISC CONCRETE HMA SURF REM PAVEMENT REM HMA SC "C" HMA SC "C" 42001300 60605000 42400800 44000100 60611700 40603310 44000157 44000500 44300300 60622354 61100605 61133100 61133200 40603305 61139900 NUMBER

ILLINOIS DEPARTMENT OF TRANSPORTATION	ECMS002 DIGECM03 ECMR003 PAGE	œ
SCHEDULE OF PRICES	- 04/27/09)
CONTRACT NUMBER - 91410	RUN TIME - 193518	

(CHENDA)

ROUTE 06-00025-01-BT MCLEAN

UNIT PRICE TOTAL PRICE DOLLARS CENTS DOLLARS CTS	— II -														
QUANTITY	0.0	 50.000 X			196,000 X	463.000 X	6.000	62.000	49.00	1 0		00:		40.000 X	479.000 X
UNIT OF MEASURE	F00T		<u>-</u> 	S) S	1 O	08	١Ö	F0(08	L. 	FOOT	F00T	
PAY ITEM DESCRIPTION	STORM SEWER	STORM SEWER SPEC 10	MOBILIZATION	TRAF CONT COMPL	SIGN PANEL T1	WOOD SIN SUPPORT	THPL PVT MK LTR & SYM	THPL PVT MK LINE 6	THPL PVT MK LINE 8	THPL PVT MK LINE 24	PT PVT MK LTRS & SYMB	PAINT PVT MK LINE 4	PAINT PVT MK LINE 6	PAINT PVT MK LINE 12	PAVT MARKING REMÖVAL
 ITEM	61140000	1140100	7100100	0103700	2000100	3000100	8000100	0400	800020	8000650	8001100	8001110	8001130	8001150	8300100

NOTE: *** PLEASE TURN PAGE FOR IMPORTANT NOTES ***

TOTAL

ROUTE 06-00025-01-BT (CHENDA) MCLEAN

ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 91410

ECMS002 DTGECM03 ECMR003 PAGE RUN DATE - 04/27/09 RUN TIME - 193518

NOTE:

EACH PAY ITEM SHOULD HAVE A UNIT PRICE AND A TOTAL PRICE.

A DISCREPANCY BETWEEN SI THERE THE UNIT PRICE SHALL GOVERN IF NO TOTAL PRICE IS SHOWN OR IF THE PRODUCT OF THE UNIT PRICE MULTIPLIED BY THE QUANTITY. . د

0 IF A UNIT PRICE IS OMITTED, THE TOTAL PRICE WILL BE DIVIDED BY THE QUANTITY IN ORDER ESTABLISH A UNIT PRICE. . თ

A UNIT PRICE NOR A TOTAL PRICE IS SHOWN. BID MAY BE DECLARED UNACCEPTABLE IF NEITHER ⋖ 4

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

- **A.** Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.
- **B.** In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.
- **C.** In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

II. ASSURANCES

A. The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

- (a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.
- (b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.
- (e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$177,412.00. Sixty percent of the salary is \$106,447.20.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

- (a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.
- 2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

H. Confidentiality

1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

III. CERTIFICATIONS

A. The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

- (a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:
 - (1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or
 - (2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.
- (b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:
 - (1) the business has been finally adjudicated not guilty; or
 - (2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.
- (c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.
- (d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.
- 2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

C. Educational Loan

- 1. Section 3 of the Educational Loan Default Act provides:
- § 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.
- 2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

D. Bid-Rigging/Bid Rotating

1. Section 33E-11 of the Criminal Code of 1961 provides:

§ 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

E. International Anti-Boycott

- 1. Section 5 of the International Anti-Boycott Certification Act provides:
- § 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.
- 2. The bidder makes the certification set forth in Section 5 of the Act.

F. Drug Free Workplace

- 1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.
- 2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:
- (a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.
- (b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.
- (c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.
- (d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.
- (e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.
- (f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.
- (g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

G. Debt Delinquency

1. The Illinois Procurement Code provides:

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder certifies that it, or any affiliate, is not barred from being awarded a contract under 30 ILCS 500. Section 50-11 prohibits a person from entering into a contract with a State agency if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The contractor further acknowledges that the contracting State agency may declare the contract void if this certification is false or if the contractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

H. Sarbanes-Oxley Act of 2002

1. The Illinois Procurement Code, Section 50-60(c), provides:

The contractor certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 for a period of five years prior to the date of the bid or contract. The contractor acknowledges that the contracting agency shall declare the contract void if this certification is false.

I. Addenda

The contractor or bidder certifies that all relevant addenda have been incorporated in to this contract. Failure to do so may cause the bid to be declared unacceptable.

J. Section 42 of the Environmental Protection Act

The contractor certifies in accordance with 30 ILCS 500/50-12 that the bidder or contractor is not barred from being awarded a contract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The contractor acknowledges that the contracting agency may declare the contract void if this certification is false.

K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the bidder certifies that it is a participant, either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project as reported on the Construction Employee Workforce Projection (Form BC-1256) and returned with the bid is accounted for and listed.

NA - FEDERAL

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

L. Executive Order Number 1 (2007) Regarding Lobbying on Government Procurements

The bidder hereby warrants and certifies that they have complied and will comply with the requirements set forth in this Order. The requirements of this warrant and certification are a material part of the contract, and the contractor shall require this warrant and certification provision to be included in all approved subcontracts.

M. Disclosure of Business Operations in Iran

Section 50-36 of the Illinois Procurement Code, 30ILCS 500/50-36 provides that each bid, offer, or proposal submitted for a State contract shall include a disclosure of whether or not the Company acting as the bidder, offer or, or proposing entity, or any of its corporate parents or subsidiaries, within the 24 months before submission of the bid, offer, or proposal had business operations that involved contracts with or provision of supplies or services to the Government of Iran, companies in which the Government of Iran has any direct or indirect equity share, consortiums or projects commissioned by the Government of Iran, or companies involved in consortiums or projects commissioned by the Government of Iran and either of the following conditions apply:

- (1) More than 10% of the Company's revenues produced in or assets located in Iran involve oil-related activities or mineral-extraction activities; less than 75% of the Company's revenues produced in or assets located in Iran involve contracts with or provision of oil-related or mineral-extraction products or services to the Government of Iran or a project or consortium created exclusively by that government; and the Company has failed to take substantial action.
- (2) The Company has, on or after August 5, 1996, made an investment of \$20 million or more, or any combination of investments of at least \$10 million each that in the aggregate equals or exceeds \$20 million in any 12-month period, which directly or significantly contributes to the enhancement of Iran's ability to develop petroleum resources of Iran.

The terms "Business operations", "Company", "Mineral-extraction activities", "Oil-related activities", "Petroleum resources", and "Substantial action" are all defined in the Code.

Failure to make the disclosure required by the Code shall cause the bid, offer or proposal to be considered not responsive. The disclosure will be considered when evaluating the bid, offer, or proposal or awarding the contract. The name of each Company disclosed as doing business or having done business in Iran will be provided to the State Comptroller.

Check the appropriate statement:
// Company has no business operations in Iran to disclose.
// Company has business operations in Iran as disclosed the attached document.

N. Political Contributions and Registration with the State Board of Elections

Sections 20-160 and 50-37 of the Illinois Procurement Code regulate political contributions from business entities and any affiliated entities or affiliated persons bidding on or contracting with the state. Generally under Section 50-37, any business entity, and any affiliated entity or affiliated person of the business entity, whose current year contracts with all state agencies exceed an awarded value of \$50,000, are prohibited from making any contributions to any political committees established to promote the candidacy of the officeholder responsible for the awarding of the contracts or any other declared candidate for that office for the duration of the term of office of the incumbent officeholder or a period 2 years after the termination of the contract, whichever is longer. Any business entity and affiliated entities or affiliated persons whose state contracts in the current year do not exceed an awarded value of \$50,000, but whose aggregate pending bids and proposals on state contracts exceed \$50,000, either alone or in combination with contracts not exceeding \$50,000, are prohibited from making any political contributions to any political committee established to promote the candidacy of the officeholder responsible for awarding the pending contract during the period beginning on the date the invitation for bids or request for proposals is issued and ending on the day after the date of award or selection if the entity was not awarded or selected. Section 20-160 requires certification of registration of affected business entities in accordance with procedures found in Section 9-35 of The Election Code.

By submission of a bid, the contractor business entity acknowledges and agrees that it has read and understands Sections 20-160 and 50-37 of the Illinois Procurement Code, and that it makes the following certification:

The undersigned business entity certifies that it has registered as a business with the State Board of Elections and acknowledges a continuing duty to update the registration in accordance with the above referenced statutes. A copy of the certificate of registration shall be submitted with the bid. The bidder is cautioned that the Department will not award a contract without submission of the certificate of registration.

These requirements and compliance with the above referenced statutory sections are a material part of the contract, and any breach thereof shall be cause to void the contract under Section 50-60 of the Illinois Procurement Code. This provision does not apply to Federal-aid contracts.

TO BE RETURNED WITH BID

IV. DISCLOSURES

A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. <u>Disclosure Forms</u>. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.**

C. Disclosure Form Instructions

Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may check the following certification statement indicating that the information previously submitted by the bidder is, as of the date of submission, current and accurate. Before checking this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder checks the Certification, the Bidder should proceed to Form B instructions.

CERTIFICATION STATEMENT

I have determined that the Form A disclosure information previously submitted is current and accurate, and all forms are hereby incorporated by reference in this bid. Any necessary additional forms or amendments to previously submitted forms are attached to this bid.					
		(Bidding Company)			
		Signature of Authorized Representative	Date		

Form A: For bidders who have NOT previously submitted the information requested in Form A

D.

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

1.	Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES NO				
2.	Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$102,600.00? YES NO				
3.	Does anyone in your organization receive more than \$106,447.20 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES NO				
4.	Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$106,447.20? YES NO				
	(Note: Only one set of forms needs to be completed <u>per person per bid</u> even if a specific individual would require a yes answer to more than one question.)				
the bidd	answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or ing entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is ed to execute contracts for your organization. Photocopied or stamped signatures are not acceptable . The person signing can be, but have to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.				
	swer to each of the above questions is "NO", then the <u>NOT APPLICABLE STATEMENT</u> on page 2 of Form A must be signed and dated by that is authorized to execute contracts for your company.				
bidding (Identifying Other Contracts & Procurement Related Information Disclosure Form B must be completed for each bid submitted by the entity. Note: Checking the NOT APPLICABLE STATEMENT on Form A does not allow the bidder to ignore Form B. Form B must be end, checked, and dated or the bidder may be considered nonresponsive and the bid will not be accepted.				
ongoing	der shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:				
agency pattached	If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an I sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital ment Board must be included. Bidders who submit Affidavits of Availability are suggested to use Option II.				
Option II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type "See Affidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the Affidavit of Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.					
<u>Bidders</u>	Submitting More Than One Bid				
	submitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. Indicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms ence.				
	ne bid submitted for letting item contains the Form A disclosures or Certification Statement and the Form B sclosures. The following letting items incorporate the said forms by reference:				

is

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form A Financial Information & Potential Conflicts of Interest Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)
Disclosure of the information contained in the LCS 500). Vendors desiring to enter into a cotential conflict of interest information as solublicly available contract file. This Form A contracts. A publicly traded company mathe requirements set forth in Form A. See	contract with the State of Illinois in pecified in this Disclosure Form. A must be completed for bids in expression a 10K disclosure (or expression)	must disclose the financial information and This information shall become part of the excess of \$10,000, and for all open-ended quivalent if applicable) in satisfaction of
1. Disclosure of Financial Information. To of ownership or distributive income share in	The individual named below has an excess of 5%, or an interest which	interest in the BIDDER (or its parent) in terms has a value of more than \$106,447.20 (60% ry and attach a separate Disclosure Form
A for each individual meeting these requ	irements)	у шта шта странато постоято т
FOR INDIVIDUAL (type or print informat	ion)	
NAME:		
ADDRESS		
Type of ownership/distributable incon	ne share:	
stock sole proprietorship	Partnership	other: (explain on separate sheet):
% or \$ value of ownership/distributable in		
2. Disclosure of Potential Conflicts of Interest relationships appearance describe.		
(a) State employment, currently or in t	he previous 3 years, including conti	ractual employment of services. YesNo
If your answer is yes, please answe	er each of the following questions.	. 65 <u> </u>
 Are you currently an office Highway Authority? 	r or employee of either the Capitol I	Development Board or the Illinois Toll YesNo
currently appointed to or enexceeds \$106,447.20, (60)	ed to or employed by any agency mployed by any agency of the State 1% of the Governor's salary as of 3 employed and your annual salary.	e of Illinois, and your annual salary /1/09) provide the name the State

3.	If you are currently appointed to or employed by any as salary exceeds \$106,447.20, (60% of the Governor's (i) more than 7 1/2% of the total distributable incomporation, or (ii) an amount in excess of the salary of	salary as of 3/1/09) are you entitled to receive ne of your firm, partnership, association or
4.	If you are currently appointed to or employed by any assalary exceeds \$106,447.20, (60% of the Governor's or minor children entitled to receive (i) more than 15% of your firm, partnership, association or corporation, or salary of the Governor?	salary as of 3/1/09) are you and your spouse in aggregate of the total distributable income
` '	employment of spouse, father, mother, son, or daughter, previous 2 years.	including contractual employment for services
If your	answer is yes, please answer each of the following ques	YesNo etions.
1.	Is your spouse or any minor children currently an office Board or the Illinois Toll Highway Authority?	r or employee of the Capitol Development YesNo
	Is your spouse or any minor children currently appointed of Illinois? If your spouse or minor children is/are curred agency of the State of Illinois, and his/her annual sala Governor's salary as of 3/1/09) provide the name of the of the State agency for which he/she is employed and his	ently appointed to or employed by any ry exceeds \$106,447.20, (60% of the spouse and/or minor children, the name
	If your spouse or any minor children is/are currently app State of Illinois, and his/her annual salary exceeds \$10 as of 3/1/09) are you entitled to receive (i) more than 71 firm, partnership, association or corporation, or (ii) ar Governor?	6,447.20.00, (60% of the salary of the Governor /2% of the total distributable income of your
	If your spouse or any minor children are currently appostate of Illinois, and his/her annual salary exceeds \$106 3/1/09) are you and your spouse or any minor children aggregate of the total distributable income from your firm (ii) an amount in excess of 2 times the salary of the Gov	,447.20, (60% of the Governor's salary as of entitled to receive (i) more than 15% in the n, partnership, association or corporation, or ernor?
		Yes No
unit of I	e status; the holding of elective office of the State of Illino local government authorized by the Constitution of the Scurrently or in the previous 3 years.	
	nship to anyone holding elective office currently or in the daughter.	previous 2 years; spouse, father, mother, YesNo
America of the S	tive office; the holding of any appointive government office, or any unit of local government authorized by the Constate of Illinois, which office entitles the holder to compensation of that office currently or in the previous 3 years.	stitution of the State of Illinois or the statues
	nship to anyone holding appointive office currently or in the daughter.	ne previous 2 years; spouse, father, mother, YesNo
(g) Employ	yment, currently or in the previous 3 years, as or by any r	registered lobbyist of the State government. YesNo

son, or daughter.	YesNo				
(i) Compensated employment, currently or in the previous 3 years, by any regist committee registered with the Secretary of State or any county clerk of the State action committee registered with either the Secretary of State or the Federal Bo	e of Illinois, or any political				
(j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a collast 2 years by any registered election or re-election committee registered with a county clerk of the State of Illinois, or any political action committee registered State or the Federal Board of Elections.	the Secretary of State or any				
	Yes No				
APPLICABLE STATEMENT					
This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on	previous page.				
Completed by:					
Signature of Individual or Authorized Representative	Date				
NOT APPLICABLE STATEMENT					
I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A.					
This Disclosure Form A is submitted on behalf of the CONTRACTOR listed on the previous page.					
Signature of Authorized Representative	Date				

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form B Other Contracts & Procurement Related Information Disclosure

Contractor Name			
Legal Address			
City, State, Zip		_	
Telephone Number	Email Address	Fax Number (if available	e)
Disclosure of the information containe	d in this Form is required by the	Section 50-35 of the Illinois P	rocurement
Act (30 ILCS 500). This information s			m B must
pe completed for bids in excess of \$10	0,000, and for all open-ended co	ontracts.	
DISCLOSURE OF O	THER CONTRACTS AND PRO	CUREMENT RELATED INFOR	MATION
1. Identifying Other Contracts & F has any pending contracts (including any other State of Illinois agency: If "No" is checked, the bidder only	leases), bids, proposals, or other Yes No	ner ongoing procurement relation	nship with
2. If "Yes" is checked. Identify each information such as bid or project nu INSTRUCTIONS:			
ТН	E FOLLOWING STATEMENT	MUST BE CHECKED	
	Signature of Authorized Repre	esentative	Date

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.



TRAINEES

Contract No. 91410
MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds

PART I. IDENTIFIC	ATION																						
Dept. Human Rights	s #						_ Du	ration o	of Proj	ect: _													
Name of Bidder:																							
PART II. WORKFO A. The undersigned which this contract wo projection including a	bidder hark is to be	as analyz e perform	ed mir ed, an	d for the	ne locati	ions fro	m whic	ch the b	idder re	cruits	employ	ees, and h	ereb	y subm	nits the fol	lowir con	ng workfo						
		TOT	AL Wo	rkforce	e Projec	tion for	Contra	act						(CURRENT		_	ES .					
				MIN	ORITY I	EMPLO	YEES			TR	AINEES	8			TO BE								
JOB CATEGORIES	EMPL	TAL OYEES		ACK	HISP		MIN	HER IOR.	APPREN- TICES	TICES			N THE JOB RAINEES		THE JOB		THE JOB			OTAL LOYEES		EMPLO	ORITY OYEES
OFFICIALS (MANAGERS)	M	F	M	F	M	F	M	F	М	F	M	F	-	M	F		M	F					
SUPERVISORS																							
FOREMEN																							
CLERICAL																							
EQUIPMENT OPERATORS																							
MECHANICS																							
TRUCK DRIVERS																							
IRONWORKERS																							
CARPENTERS																							
CEMENT MASONS																							
ELECTRICIANS																							
PIPEFITTERS, PLUMBERS																							
PAINTERS																							
LABORERS, SEMI-SKILLED LABORERS,																							
UNSKILLED																							
TOTAL																							
Т	TAE OTAL Tra	BLE C	niectio	n for C	Contract				7			FOR	DE	PARTI	MENT USE	01	ILY						
EMPLOYEES IN	TO	TAL OYEES		ACK		PANIC		THER NOR.															
TRAINING	М	F	М	F	М	F	М	F															
APPRENTICES																							
ON THE JOB																							

Note: See instructions on page 2

Other minorities are defined as Asians (A) or Native Americans (N).
Please specify race of each employee shown in Other Minorities column.

BC 1256 (Rev. 12/11/08)

Contract No. 91410
MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds

PART II. WORKFORCE PROJECTION - continued

B.		ncluded in "Total Employees" under Table A is the total number of new hires that would be employed in the vent the undersigned bidder is awarded this contract.								
	The u	ndersigned bidder projects that: (number)		new hires would be						
	recruit	ted from the area in which the contract project is lo	cated; and/or (number)							
	office	or base of operation is located.	be recruited from the ar	ca in which the blader 3 philospar						
C.		ed in "Total Employees" under Table A is a project signed bidder as well as a projection of numbers o								
		ndersigned bidder estimates that (number)ectly employed by the prime contractor and that (no yed by subcontractors.	umber)	persons will persons will be						
PART	II. AFF	IRMATIVE ACTION PLAN								
A.	A. The undersigned bidder understands and agrees that in the event the foregoing minority and female employee utilization projection included under PART II is determined to be an underutilization of minority persons or women in any job category, and in the event that the undersigned bidder is awarded this contract, he/she will, prior to commencement of work, develop and submit a written Affirmative Action Plan including a specific timetable (geared to the completion stages of the contract) whereby deficiencies in minority and/or female employee utilization are corrected. Such Affirmative Action Plan will be subject to approval by the contracting agency and the Department of Human Rights .									
B.	submi	ndersigned bidder understands and agrees that the ted herein, and the goals and timetable included upart of the contract specifications.								
Comp	any		Telephone Numb	per						
Addre	 SS									
		NOTICE REGARDIN	G SIGNATURE							
		signature on the Proposal Signature Sheet will constituted only if revisions are required.	e the signing of this form.	The following signature block needs						
Signat	ure: 🗌		Title:	Date:						
Instruct	ions:	All tables must include subcontractor personnel in addition to	prime contractor personnel.							
Table A -		Include both the number of employees that would be hired to perform the contract work and the total number currently employed (Table B) that will be allocated to contract work, and include all apprentices and on-the-job trainees. The "Total Employees" column should include all employees including all minorities, apprentices and on-the-job trainees to be employed on the contract work.								
Table B	-	Include all employees currently employed that will be allocate currently employed.	d to the contract work including	ng any apprentices and on-the-job trainees						
Table C	: -	Indicate the racial breakdown of the total apprentices and on-	the-job trainees shown in Tab	le A.						
				PC 1256 (Pay 12/11/09)						

ADDITIONAL FEDERAL REQUIREMENTS

In addition to the Required Contract Provisions for Federal-Aid Construction Contracts (FHWA 1273), all bidders make the following certifications.

- A. By the execution of this proposal, the signing bidder certifies that the bidding entity has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with the submitted bid. This statement made by the undersigned bidder is true and correct under penalty of perjury under the laws of the United States.
- B. <u>CERTIFICATION, EQUAL EMPLOYMENT OPPORTUNITY:</u>

1.	Have you participated in any previous contracts or subcontracts subject to the equal opportunity clause. YES NO
2.	If answer to #1 is yes, have you filed with the Joint Reporting Committee, the Director of OFCC, any Federal agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements of those organizations? YES NO

Contract No. 91410
MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds

PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

	Firm Name	
(IF AN INDIVIDUAL)	Signature of Owner	
	Business Address	
	240600 / 144600	
	Firm Name	
(IF A CO-PARTNERSHIP)		
(II A CO-I AKTNEKOTIII)	Dusilless Address	
		Name and Address of All Members of the Firm:
	Corporate Name	
((F.), 000000 (Fig.)	Бу	Signature of Authorized Representative
(IF A CORPORATION)		
		Typed or printed name and title of Authorized Representative
	Attact	
	Allesi	Signature
(IF A JOINT VENTURE, USE THIS SECTION FOR THE MANAGING PARTY AND THE	Business Address	
SECOND PARTY SHOULD SIGN BELOW)		
	Corporate Name	
(IF A JOINT VENTURE)	_,	Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
	Attest	
	, most	Signature
	Business Address	
If more than two parties are in the joint venture,	olease attach an addit	ional signature sheet.



Return with Bid

Division of Highways Proposal Bid Bond (Effective November 1, 1992)

		Item No.
		Letting Date
KNOW ALL MEN BY THESE PRESENTS, That We		
as PRINCIPAL, and		
		as SURETY, are
held jointly, severally and firmly bound unto the STATE OF specified in Article 102.09 of the "Standard Specifications for F is the lesser sum, well and truly to be paid unto said STATE administrators, successors and assigns.	Road and Bridge Construct	tion" in effect on the date of invitation for bids, whichever
THE CONDITION OF THE FOREGOING OBLIGATION IS STATE OF ILLINOIS, acting through the Department of Tra Number and Letting Date indicated above.		·
NOW, THEREFORE, if the Department shall accept the and as specified in the bidding and contract documents, submafter award by the Department, the PRINCIPAL shall enter in including evidence of the required insurance coverages and performance of such contract and for the prompt payment of failure of the PRINCIPAL to make the required DBE submissio to the Department the difference not to exceed the penalty he which the Department may contract with another party to per void, otherwise, it shall remain in full force and effect.	nit a DBE Utilization Plan to to a contract in accordance providing such bond as a labor and material furnish or to enter into such contered between the amount	nat is accepted and approved by the Department; and if, se with the terms of the bidding and contract documents specified with good and sufficient surety for the faithful hed in the prosecution thereof; or if, in the event of the tract and to give the specified bond, the PRINCIPAL pays specified in the bid proposal and such larger amount for
IN THE EVENT the Department determines the PRINCII paragraph, then Surety shall pay the penal sum to the Department may bring expenses, including attorney's fees, incurred in any litigation in In TESTIMONY WHEREOF, the said PRINCIPAL and the	nent within fifteen (15) days g an action to collect the ar which it prevails either in w ne said SURETY have caus	s of written demand therefor. If Surety does not make full mount owed. Surety is liable to the Department for all its whole or in part. sed this instrument to be signed by
their respective officers this day of		A.D.,
PRINCIPAL	SURETY	
(Company Name)		(Company Name)
By (Signature & Title)	Ву:	
(Signature & Title)		(Signature of Attorney-in-Fact)
•	tification for Principal and S	Surety
STATE OF ILLINOIS, County of		
l,	, a Notary Pul	olic in and for said County, do hereby certify that
·	and	
(Insert names of individua	ls signing on behalf of PRI	NCIPAL & SURETY)
who are each personally known to me to be the same persons and SURETY, appeared before me this day in person and ack and voluntary act for the uses and purposes therein set forth.	s whose names are subscrinowledged respectively, th	ibed to the foregoing instrument on behalf of PRINCIPAL at they signed and delivered said instrument as their free
Given under my hand and notarial seal this	day of	A.D.
My commission expires		
In Proceedings of the Above 1997 1997 1997	Tamas the Date to the Co	Notary Public
In lieu of completing the above section of the Proposal Bid F marking the check box next to the Signature and Title line be and the Principal and Surety are firmly bound unto the State of	low, the Principal is ensur	ing the identified electronic bid bond has been executed
Electronic Bid Bond ID# Company / Bidde	r Name	Signature and Title

PROPOSAL ENVELOPE



PROPOSALS

for construction work advertised for bids by the Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:	
Address:	
Phone No.	

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 326 Illinois Department of Transportation 2300 South Dirksen Parkway Springfield, Illinois 62764

NOTICE

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 91410
MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds



Illinois Department of Transportation

NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS. Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., June 12, 2009. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.
- **2. DESCRIPTION OF WORK**. The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

Contract No. 91410
MCLEAN County
Section 06-00025-01-BT (Chenoa)
Project ARA-HD-113(029)
Route ROUTE 66 BIKE TRAIL
District 5 Construction Funds

Project consists of constructing a multi-use bike trail including earth excavation, milling, aggregate base course, HMA shoulders and surface, topsoil excavation and placement, erosion control, seeding, fertilizer, mulch, pavement markings, signing and all other incidental items to complete the work on the Route 66 Bike Trail from TR 3000N to a commercial entrance north of U.S. Route 24 in the city of Chenoa.

- 3. INSTRUCTIONS TO BIDDERS. (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.
 - (b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the Illinois Department of Transportation

Gary Hannig, Acting Secretary

INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2009.

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-07) (Revised 1-1-09)

SUPPLEMENTAL SPECIFICATIONS

Std. Sp		<u>age No.</u>
201	Clearing, Tree Removal and Protection	
205	Embankment	
251	Mulch	
253	Planting Woody Plants	
280	Temporary Erosion Control	6
443	Reflective Crack Control Treatment	7
502	Excavation for Structures	10
503	Concrete Structures	11
504	Precast Concrete Structures	12
505	Steel Structures	13
540	Box Culverts	14
581	Waterproofing Membrane System	15
633	Removing and Reerecting Guardrail and Terminals	16
669	Removal and Disposal of Regulated Substances	17
672	Sealing Abandoned Water Wells	
701	Work Zone Traffic Control and Protection	19
733	Overhead Sign Structures	
783	Pavement Marking and Marker Removal	21
801	Electrical Requirements	
805	Electrical Service Installation – Traffic Signals	23
836	Pole Foundation	24
838	Breakaway Devices	
862	Uninterruptable Power Supply	26
873	Electric Cable	
878	Traffic Signal Concrete Foundation	
1004	Coarse Aggregates	
1008	Structural Steel Coatings	
1010	Finely Divided Materials	
1020	Portland Cement Concrete	34
1022	Concrete Curing Materials	43
1024	Nonshrink Grout	44
1042	Precast Concrete Products	45
1062	Reflective Crack Control System	47
1069	Pole and Tower	49
1074	Control Equipment	
1076	Wire and Cable	57
1081	Materials for Planting	
1083	Flastomeric Bearings	60
1094	Overhead Sign Structures	61
1101	General Equipment	62
1102	Hot-Mix Asphalt Equipment	63
1106	Work Zone Traffic Control Devices	

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHE	CK SI	<u>PAGE</u>	NO.
1	\boxtimes	Additional State Requirements For Federal-Aid Construction Contracts	05
		(Eff. 2-1-69) (Rev. 1-1-07)	65
2	\boxtimes	Subletting of Contracts (Federal-Aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93)	67 68
3		EEO (Eff. 7-21-78) (Rev. 11-18-80)	00
4	Ш	Specific Equal Employment Opportunity Responsibilities Non Federal-Aid Contracts (Eff. 3-20-69) (Rev. 1-1-94)	78
E	\Box	Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 1-1-94)	
5	片	Reserved	88
6 7	Η	Reserved	89
8	H	Haul Road Stream Crossings, Other Temporary Stream Crossings, and	-
U	ш	In-Stream Work Pads (Eff. 1-2-92) (Rev. 1-1-98)	90
9	П	Construction Layout Stakes Except for Bridges (Eff. 1-1-99) (Rev. 1-1-07)	
10	Ħ	Construction Layout Stakes (Eff. 5-1-93) (Rev. 1-1-07)	94
11	Ħ	Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-07)	97
12		Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 1-1-07)	99
13		Hot-Mix Asphalt Surface Correction (Eff. 11-1-87) (Rev. 1-1-09)	103
14		Pavement and Shoulder Resurfacing (Eff. 2-1-00) (Rev. 1-1-09)	105
15		PCC Partial Depth Hot-Mix Asphalt Patching (Eff. 1-1-98) (Rev. 1-1-07)	106
16		Patching with Hot-Mix Asphalt Overlay Removal (Eff. 10-1-95) (Rev. 1-1-07)	108
17		Polymer Concrete (Eff. 8-1-95) (Rev. 1-1-08)	
18	Ц	PVC Pipeliner (Eff. 4-1-04) (Rev. 1-1-07)	
19	Ц	Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-07)	
20	님	Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	113
21	님	Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-07)	117
22	H	Temporary Modular Glare Screen System (Eff. 1-1-00) (Rev. 1-1-07)	
23 24	H	Work Zone Public Information Signs (Eff. 9-1-02) (Rev. 1-1-07)	
2 4 25	H	Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	124
26	H	English Substitution of Metric Bolts (Eff. 7-1-96)	125
27	Ħ	English Substitution of Metric Reinforcement Bars (Eff. 4-1-96) (Rev. 1-1-03)	
28	Ħ	Calcium Chloride Accelerator for Portland Cement Concrete (Eff. 1-1-01)	
29	Ħ	Reserved	
30		Quality Control of Concrete Mixtures at the Plant	
		(Éff. 8-1-00) (Rev. 1-1-09)	129
31		Quality Control/Quality Assurance of Concrete Mixtures	
		(Eff. 4-1-92) (Rev. 1-1-09)	
32		Asbestos Bearing Pad Removal (Eff. 11-1-03)	
33		Asbestos Hot-Mix Asphalt Surface Removal (Eff. 6-1-89) (Rev. 1-1-09)	150
	,		450
LRS			152
LRS		Furnished Excavation (Eff. 1-1-99) (Rev. 1-1-07)	153
LRS			154
LRS LRS		Contract Claims (Eff. 1-1-02) (Rev. 1-1-07)	156
LRS		Bidding Requirements and Conditions for Contract Proposals (Eff. 1-1-02)	157
LRS		Bidding Requirements and Conditions for Material Proposals (Eff. 1-1-02) (Rev. 1-1-03)	163
LRS		Failure to Complete the Work on Time (Eff. 1-1-99)	
LRS		Bituminous Surface Treatments (Eff. 1-1-99)	
LRS		Reflective Sheeting Type C (Eff. 1-1-99) (Rev. 1-1-02)	
LRS		Fmployment Practices (Eff. 1-1-99)	172
LRS		Wages of Employees on Public Works (Eff. 1-1-99) (Rev. 4-1-06)	174
LRS	13	Selection of Labor (Eff. 1-1-99)	175
LRS	_	Paving Brick and Concrete Paver Pavements and Sidewalks (Eff. 1-1-04) (Rev. 1-1-09)	176
IRS		Partial Payments (Eff. 1-1-07)	

INDEX OF SPECIAL PROVISIONS

INTENT OF PROJECT	
DESCRIPTION OF WORK	1
EXAMINATION OF EXISTING CONDITIONS AND EXISTING CONDITION DOCUMENTATION	
CONSTRUCTION LAYOUT	
EARTH EXCAVATION	2
REMOVAL OF UNCLASSIFIED MATERIAL	
SIGNS TO BE MOVED	
SIGNS TO BE REMOVED	
EMBANKMENT	3
SUBGRADE PREPARATION	4
TEST ROLLING OF SUBGRADE AND BASE COURSE	
GRANULAR SUBGRADE REPAIR OR REPLACEMENT	
ADJUSTMENT OF QUANTITIES FOR SUBGRADE TREATMENTS	
TOPSOIL EXCAVATION AND PLACEMENT	
TEMPORARY EROSION CONTROL	
SEEDING, CLASS 2 SPECIAL	
EXPLORATORY EXCAVATION	6
TREATMENT OF EXISTING TILE OR SUMP DRAIN LINE SYSTEMS	
CONCRETE COLLAR	
TRENCH BACKFILL	
FLY ASH IN MIX FOR COMBINATION CONCRETE CURB AND GUTTER	
COMBINATION CONCRETE CURB AND GUTTERCOMBINATION CONCRETE CURB AND GUTTER TYPE B (SPECIAL)	<u>/</u>
COMBINATION CONCRETE CORD AND GUITER TIPE B (SPECIAL)	<i>ا</i>
EXPANSION JOINTSSAW JOINTS	
WOOD BOLLARD	
CONCRETE PARKING BLOCKS	
APPLICATION OF PRIME COAT	
AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	
HOT-MIX ASPHALT SURFACE COURSE GENERAL CONDITIONS	
TRAFFIC CONTROL COMPLETESEQUENCE OF OPERATIONS	10
STANDARDS IN THE PLANS	
DAMAGE TO NEW OR EXISTING STRUCTURES OR PROPERTY	10
UTILITIES	11
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS	. 11
PLAN QUANTITY CALCULATION RATES	
CERTIFICATE OF INSURANCE	
COMMITMENTS	
OTODALWATED DOLLLITION DREVENTION DLAN	40

INDEX LOCAL ROADS AND STREETS SPECIAL PROVISIONS

LR SD 13 Required Cold Milled Surface Texture Nov. 1, 1987 Jan. 1, 2007 LR 102 Protests on Local Lettings Jan. 1, 2007 LR 105 24 Cooperation with Utilities Jan. 1, 1999 Jan. 1, 2007 LR 107-2 Railroad Protective Liability Insurance for Local Lettings Mar. 1, 2005 Jan. 1, 2008 LR 107-3 Disadvantaged Business Enterprise Participation Jan. 1, 2007 Nov. 1, 2008 LR 107-5 Insurance Feb. 1, 2007 Aug. 1, 2007 LR 108 Combination Bids Jan. 1, 1994 Mar. 1, 2005 LR 212 Shaping Roadway Aug. 1, 1969 Jan. 1, 2002 LR 355-2 Asphalt Stabilized Base Course, Road Mix or Traveling Plant Mix Feb. 2, 1963 Jan. 1, 2007 LR 400-1 Bituminous Treated Earth Surface Jan. 1, 2008 Jan. 1, 2008 LR 400-2 Bituminous Turface Mixture (Class B) Jan. 1, 2008 Jan. 1, 2008 LR 403-2 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1869 Jan. 1, 2007 LR 406 Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2004 Jan. 1, 2007 LR	LR#	Pg#		Special Provision Title	Effective	Revised
R 102	LR SD 12			Slab Movement Detection Device	Nov. 11, 1984	Jan. 1, 2007
RR 105	LR SD 13			Required Cold Milled Surface Texture	·	Jan. 1, 2007
Railroad Protective Liability Insurance for Local Lettings	LR 102			Protests on Local Lettings	•	
R 107-3	LR 105	24	\boxtimes	Cooperation with Utilities	Jan. 1, 1999	
LR 107-4 27	LR 107-2			Railroad Protective Liability Insurance for Local Lettings	Mar. 1, 2005	Jan. 1, 2006
LR 107-4 27	LR 107-3			Disadvantaged Business Enterprise Participation	Jan. 1, 2007	•
LR 107-5	LR 107-4	27	\boxtimes		Feb. 1, 2007	
LR 108 Combination Bids Jan. 1, 1994 Mar. 1, 2005 LR 212 Shaping Roadway Aug. 1, 1969 Jan. 1, 2002 LR 355-1 Asphalt Stabilized Base Course, Road Mix or Traveling Plant Mix Oct. 1, 1973 Jan. 1, 2007 LR 355-2 Asphalt Stabilized Base Course, Plant Mix Feb. 2, 1963 Jan. 1, 2007 LR 400-1 Bituminous Treated Earth Surface Jan. 1, 2008 LR 400-2 Bituminous Surface Mixture (Class B) Jan. 1, 2008 LR 400-3 Pavement Rehabilitation by the Heat-Scarify-Overlay Method Jan. 1, 2008 LR 400-2 Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 400-3 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 403-2 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 Jan. 1, 2008 LR 420 PCC Pavement (Special) May 12, 1964 Jan. 1, 2007 LR 451 Crack Filling Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jan. 1, 2007 LR 503-2 Furnishing C	LR 107-5		_	Substance Abuse Prevention Program	Jan. 1, 2008	Jan. 8, 2008
R 355-1					Jan. 1, 1994	Mar. 1, 2005
LR 355-1 Asphalt Stabilized Base Course, Road Mix or Traveling Plant Mix Oct. 1, 1973 Jan. 1, 2007 LR 355-2 Asphalt Stabilized Base Course, Plant Mix Feb. 2, 1963 Jan. 1, 2007 LR 400-1 Bituminous Treated Earth Surface Jan. 1, 2008 LR 400-2 Bituminous Surface Mixture (Class B) Jan. 1, 2008 LR 400-3 Pavement Rehabilitation by the Heat-Scarify-Overlay Method Jan. 1, 2008 LR 402 Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 403-2 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 Jan. 1, 2007 LR 420 PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 503-1 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-2 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002	LR 212		\Box	Shaping Roadway	Aug. 1, 1969	Jan. 1, 2002
LR 355-2 ☐ Asphalt Stabilized Base Course, Plant Mix Feb. 2, 1963 Jan. 1, 2007 LR 400-1 ☐ Bituminous Treated Earth Surface Jan. 1, 2008 LR 400-2 ☐ Bituminous Surface Mixture (Class B) Jan. 1, 2008 LR 400-3 ☐ Pavement Rehabilitation by the Heat-Scarify-Overlay Method Jan. 1, 2008 LR 402 ☐ Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 403-2 ☐ Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 ☐ Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 May 12, 1964 Jan. 2, 2007 LR 420 ☐ PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 ☐ Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 503-1 ☐ Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-2 ☐ Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 542 ☐ Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 ☐ Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007					Oct. 1, 1973	Jan. 1, 2007
LR 400-1 Bituminous Treated Earth Surface Jan. 1, 2008 LR 400-2 Bituminous Surface Mixture (Class B) Jan. 1, 2008 LR 400-3 Pavement Rehabilitation by the Heat-Scarify-Overlay Method Jan. 1, 2008 LR 402 Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 403-2 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 LR 420 PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2007 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type			\Box		Feb. 2, 1963	Jan. 1, 2007
Bituminous Surface Mixture (Class B)			\Box	·	Jan. 1, 2008	
LR 402 ☐ Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 403-2 ☐ Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 ☐ Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 Jan. 1, 2008 LR 420 ☐ PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 ☐ Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 ☐ Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 ☐ Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 ☐ Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 ☐ Pipe Culverts, Type				Bituminous Surface Mixture (Class B)	Jan. 1, 2008	
LR 402 ☐ Salt Stabilized Surface Course Feb. 20, 1963 Jan. 1, 2007 LR 403-2 ☐ Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 ☐ Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 Jan. 1, 2008 LR 420 ☐ PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 ☐ Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 ☐ Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 ☐ Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 ☐ Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 ☐ Pipe Culverts, Type	LR 400-3			Pavement Rehabilitation by the Heat-Scarify-Overlay Method	Jan. 1, 2008	
LR 403-2 Bituminous Hot Mix Sand Seal Coat Aug. 1, 1969 Jan. 1, 2007 LR 406 Filling HMA Core Holes with Non-shrink Grout Jan. 1, 2008 LR 420 PCC Pavement (Special) May 12, 1964 Jan. 2, 2007 LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1,	LR 402				Feb. 20, 1963	Jan. 1, 2007
LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 Growth Curve Mar. 1, 2008 Feb. 1, 2007 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007				Bituminous Hot Mix Sand Seal Coat	Aug. 1, 1969	Jan. 1, 2007
LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 Growth Curve Mar. 1, 2008 Feb. 1, 2007 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 406			Filling HMA Core Holes with Non-shrink Grout	Jan. 1, 2008	
LR 442 Bituminous Patching Mixtures for Maintenance Use Jan. 1, 2004 Jun. 1, 2007 LR 451 Crack Filling Bituminous Pavement with Fiber-Asphalt Oct. 1, 1991 Jan. 1, 2007 LR 503-1 Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 Growth Curve Mar. 1, 2008 Feb. 1, 2007 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 420				May 12, 1964	Jan. 2, 2007
LR 503-1 ☐ Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 ☐ Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 ☐ Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 ☐ Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 ☐ Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 ☐ Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 ☐ Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 ☐ Growth Curve Mar. 1, 2008 LR 1032-1 ☐ Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 ☐ Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 442			Bituminous Patching Mixtures for Maintenance Use	Jan. 1, 2004	Jun. 1, 2007
LR 503-1 ☐ Furnishing Class SI Concrete Oct. 1, 1973 Jan. 1, 2002 LR 503-2 ☐ Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 ☐ Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 ☐ Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 ☐ Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 ☐ Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 ☐ Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 ☐ Growth Curve Mar. 1, 2008 LR 1032-1 ☐ Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 ☐ Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 451			Crack Filling Bituminous Pavement with Fiber-Asphalt	Oct. 1, 1991	Jan. 1, 2007
LR 503-2 Furnishing Class SI Concrete (Short Load) Jan. 1, 1989 Jan. 1, 2002 LR 542 Pipe Culverts, Type (Furnished) Sep. 1, 1964 Jan. 1, 2007 LR 663 Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2008 LR 1030 Growth Curve Mar. 1, 2008 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007					Oct. 1, 1973	Jan. 1, 2002
LR 663 ☐ Calcium Chloride Applied Jun. 1, 1958 Jan. 1, 2007 LR 702 ☐ Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 ☐ Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 ☐ Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2002 LR 1030 ☐ Growth Curve Mar. 1, 2008 LR 1032-1 ☐ Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 ☐ Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007				Furnishing Class SI Concrete (Short Load)	Jan. 1, 1989	Jan. 1, 2002
LR 702 ☐ Construction and Maintenance Signs Jan. 1, 2004 Jun. 1, 2007 LR 1004 ☐ Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 ☐ Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2002 LR 1030 ☐ Growth Curve Mar. 1, 2008 LR 1032-1 ☐ Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 ☐ Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 542			Pipe Culverts, Type (Furnished)	Sep. 1, 1964	Jan. 1, 2007
LR 1004 Coarse Aggregate for Bituminous Surface Treatment Jan. 1, 2002 Jan. 1, 2007 LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2002 LR 1030 Growth Curve Mar. 1, 2008 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 663				Jun. 1, 1958	Jan. 1, 2007
LR 1013 Rock Salt (Sodium Chloride) Aug. 1, 1969 Jan. 1, 2002 LR 1030 Growth Curve Mar. 1, 2008 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 702			Construction and Maintenance Signs	Jan. 1, 2004	Jun. 1, 2007
LR 1030 Growth Curve Mar. 1, 2008 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 1004			Coarse Aggregate for Bituminous Surface Treatment	Jan. 1, 2002	Jan. 1, 2007
LR 1030 Growth Curve Mar. 1, 2008 LR 1032-1 Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 1013			Rock Salt (Sodium Chloride)	Aug. 1, 1969	Jan. 1, 2002
LR 1032-1 □ Penetrating Emulsions Jan. 1, 2007 Feb. 1, 2007 LR 1032-2 □ Multigrade Cold Mix Asphal Jan. 1, 2007 Feb. 1, 2007	LR 1030			Growth Curve	Mar. 1, 2008	
LR 1032-2				Penetrating Emulsions	Jan. 1, 2007	Feb. 1, 2007
	LR 1032-2				Jan. 1, 2007	Feb. 1, 2007
LIT 1102 LIT 10ad with of traveling a latituity Equipment can. 1, 2007	LR 1102			Road Mix or Traveling Plan Mix Equipment	Jan. 1, 2007	

BDE SPECIAL PROVISIONS For the April 24 and June 12, 2009 Lettings

The following special provisions indicated by an "X" are applicable to this contract. An * indicates a new or revised special provision for the letting.

File Name	Pg#		Special Provision Title	Effecti	<u>ve</u>	Revised
80099			Accessible Pedestrian Signals (APS)	April 1	, 2003	Jan. 1, 2007
80186			Alkali-Silica Reaction for Cast-in-Place Concrete	Aug. 1		Jan. 1, 2009
80213			Alkali-Silica Reaction for Precast and Precast Prestressed Concrete	Jan. 1	, 2009	
* 80243	28	Χ	American Recovery and Reinvestment Act Provisions	April 1	, 2009	
* 80236	29	X		April 1	, 2009	April 2, 2009
80207	35	X	Approval of Proposed Borrow Areas, Use Areas, and/or Waste Areas Inside	Nov. 1	, 2008	
			Illinois State Borders			
80192			Automated Flagger Assistance Device		, 2008	
* 80173			Bituminous Materials Cost Adjustments		, 2006	
50261			Building Removal-Case I (Non-Friable and Friable Asbestos)	Sept. 1		Jan. 1, 2007
50481			Building Removal-Case II (Non-Friable Asbestos)	Sept. 1	•	Jan. 1, 2007
50491			Building Removal-Case III (Friable Asbestos)	Sept. 1		Jan. 1, 2007
50531		avecano una	Building Removal-Case IV (No Asbestos)	Sept. 1		Jan. 1, 2007
* 80166	36	<u> X</u>			, 2007	April 1, 2009
80198			Completion Date (via calendar days)	April 1		
80199			Completion Date (via calendar days) Plus Working Days	April 1		
* 80094	39	X	XX: 2000 X 20000 X 2000			April 1, 2009
80193			Concrete Barrier		, 2008	
80214			Concrete Gutter, Type A	Jan. 1		
80215		US 200 B 3	Concrete Joint Sealer	Jan. 1 April 1		
* 80226	40	v	Concrete Mix Designs	April 1		
* 80237	43	X	Construction Air Quality – Diesel Vehicle Emissions Control	**************************************		
* 80239	45	X	Construction Air Quality – Idling Restrictions	April 1	, 2009 , 2009	
* 80227	2001		Determination of Thickness	April 1		
80177	47		Digital Terrain Modeling for Earthwork Calculations			Nov. 1 2009
80029	47 55	X	Disadvantaged Business Enterprise Participation	Sept. 1		Nov. 1, 2008
80178	55	Х	Dowel Bars	April 1		Jan. 1, 2008
80179			Engineer's Field Office Type A	April 1		Aug. 1, 2008
80205			Engineer's Field Office Type B	Aug. 1		
80175	50	<u> </u>	Epoxy Pavement Markings	Jan. 1. Aug. 2.		Jan. 2, 2008
80189	56	_X_	Equipment Rental Rates	Aug. 2 April 1		Jan. 2, 2006
* 80228 * 80229			Flagger at Side Roads and Entrances Fuel Cost Adjustment	April 1	**************************************	
Water Committee		30,3	High Tension Cable Median Barrier	Jan. 1		
80169 80194			HMA – Hauling on Partially Completed Full-Depth Pavement	Jan. 1,		
80181	58	х	Hot-Mix Asphalt – Field Voids in the Mineral Aggregate	April 1		April 1, 2008
80201	60	$\hat{\mathbf{x}}$	Hot-Mix Asphalt – Field Volds in the Milleral Aggregate Hot-Mix Asphalt – Plant Test Frequency	April 1,		April 1, 2000
80201	62	$\frac{\hat{x}}{x}$	Hot-Mix Asphalt – Flant Test Frequency	April 1,		
80136	02		Hot-Mix Asphalt — Transportation Hot-Mix Asphalt Mixture IL-4.75	Nov. 1,		Jan. 1, 2008
80195	63	V	Hot-Mix Asphalt Mixture IL-9.5L	Jan. 1,		Jan. 1, 2000
80109	03	X	Impact Attenuators	Nov. 1,	•	Nov. 1, 2008
80110			Impact Attenuators, Temporary	Nov. 1,		Jan. 1, 2007
* 80230	64	X			, 2009	
80196		35///25	Mast Arm Assembly and Pole	Jan. 1,		Jan. 1, 2009
80045			Material Transfer Device	June 15,		Jan. 1, 2009
* 80203			Metal Hardware Cast into Concrete	April 1		April 1, 2009
80165	S-EMWARKS.	Distriction (Moisture Cured Urethane Paint System	Nov. 1,		Jan. 1, 2007
* 80238	65	Х	Monthly Employment Report	April 1,		
80082		3007.7000	Multilane Pavement Patching	Nov. 1,		
80180	67	Х	National Pollutant Discharge Elimination System / Erosion and Sediment	April 1,		Nov. 1, 2008
30100	٠.	``	Control Deficiency Deduction	. 4	-	
			(NOTE: This special provision was previously named "Erosion and Sediment			
			Control Deficiency Deduction".)			
80208			Nighttime Work Zone Lighting	Nov. 1,	2008	
80129			Notched Wedge Longitudinal Joint	July 1,		Jan. 1, 2007
80182			Notification of Reduced Width	April 1,		
				•		

<u>File Name</u>	<u>Pg#</u>	Special Provision Title	<u>Effective</u>	<u>Revised</u>
80069	ندان	Organic Zinc-Rich Paint System	Nov. 1, 2001	Jan. 1, 2008
80216		Partial Exit Ramp Closure for Freeway/Expressway	Jan. 1, 2009	
* 80231		Pavement Marking Removal	April 1, 2009	
80022	68	X Payments to Subcontractors	June 1, 2000	Jan. 1, 2006
* 80235	- 70	X Payrolls and Payroll Records	Mar. 1, 2009	
80209	72	X Personal Protective Equipment	Nov. 1, 2008	
* 80232		Pipe Culverts	April 1, 2009	
80134		Plastic Blockouts for Guardrail	Nov. 1, 2004	Jan. 1, 2007
80119		Polyurea Pavement Marking	April 1, 2004	Jan. 1, 2009
80210		Portland Cement Concrete Inlay or Overlay	Nov. 1, 2008	
80170		Portland Cement Concrete Plants	Jan. 1, 2007	
80217		Post Clips for Extruded Aluminum Signs	Jan. 1, 2009	
80171		Precast Handling Holes	Jan. 1, 2007	
* 80218		Preventive Maintenance – Bituminous Surface Treatment	Jan. 1, 2009	April 1, 2009
* 80219	4.1	Preventive Maintenance — Cape Seal	Jan: 1, 2009	April 1, 2009
80220		Preventive Maintenance – Micro-Surfacing	Jan. 1, 2009	
80221		Preventive Maintenance – Slurry Seal	Jan. 1, 2009	
80211		Prismatic Curb Reflectors	Nov. 1, 2008	
80015		Public Convenience and Safety Railroad Protective Liability Insurance	Jan. 1, 2000 Dec. 1, 1986	Jan. 1, 2006
3426I 80157		Railroad Protective Liability Insurance Railroad Protective Liability Insurance (5 and 10)	Jan. 1, 2006	Jan. 1, 2000
80223		Ramp Closure for Freeway/Expressway	Jan. 1, 2009	
* 80172	73	X. Reclaimed Asphalt Pavement (RAP)		April 1, 2009
80183	80	X Reflective Sheeting on Channelizing Devices	April 1, 2007	Nov. 1, 2008
* 80151	00	Reinforcement Bars		April 1, 2009
* 80206		Reinforcement Bars - Storage and Protection		April 1, 2009
80224		Restoring Bridge Approach Pavements Using High-Density Foam	Jan. 1, 2009	eneral Principa — 2.252.9
80184	81	X Retroreflective Sheeting, Nonreflective Sheeting, and Translucent Overlay	April 1, 2007	
00.01	٠.	Film for Highway Signs		
* 80233			April 1, 2009	
80131	87	X Seeding	July 1, 2004	Jan. 1, 2009
80152		Self-Consolidating Concrete for Cast-In-Place Construction	Nov. 1, 2005	Jan. 1, 2009
80132		Self-Consolidating Concrete for Precast Products	July 1, 2004	Jan. 1, 2007
80212	89	X Sign Panels and Sign Panel Overlays	Nov. 1, 2008	
80197	90	X Silt Filter Fence	Jan. 1, 2008	***************************************
		Steel Cost Adjustment	April 2, 2004	April 1, 2009
80153		Steel Plate Beam Guardrail	Nov. 1, 2005	Aug. 1, 2007
80191		Stone Gradation Testing	Nov. 1, 2007	
* 80234		Storm Sewers	April 1, 2009	
80143	91	X Subcontractor Mobilization Payments	April 2, 2005	
80075		Surface Testing of Pavements	April 1, 2002	Jan. 1, 2007
80087	92	X Temporary Erosion Control	Nov. 1, 2002	Jan. 1, 2008
80225		Temporary Raised Pavement Marker	Jan. 1, 2009	
80176	93	Thermoplastic Pavement Markings	Jan. 1, 2007	
20338		Training Special Provisions	Oct. 15, 1975	
80185		Type ZZ Retroreflective Sheeting, Nonreflective Sheeting, and Translucent Overlay Film for Highway Signs	April 1, 2007	
80149		Variable Spaced Tining	Aug. 1, 2005	Jan. 1, 2007
80071	95	X Working Days	Jan. 1, 2002	Jan. 1, 2001
80204	90	Woven Wire Fence	April 1, 2008	
30207			, .p ,, 2000	

The following special provisions are in the 2009 Supplemental Specifications and Recurring Special Provisions:

File Name 80108	Special Provision Title Asbestos Bearing Pad Removal	New Location Check Sheet #32	Effective Nov. 1, 2003	Revised
72541	Asbestos Waterproofing Membrane and Asbestos Hot-Mix		June 1, 1989	Jan. 2, 2007
12541	Asphalt Surface Removal	Oneok Grieet #00	tune 1, 1000	oan. 2, 2001
80167	Electrical Service Installation – Traffic Signals	Section 805	Jan. 1, 2007	
80164	Removal and Disposal of Regulated Substances	Section 669	Aug. 1, 2006	Jan. 1, 2007
80161	Traffic Signal Grounding	Sections 873 and 1076	April 1, 2006	Jan. 1, 2007
80162	Uninterruptable Power Supply (UPS)	Sections 801, 862 and 1074	April 1, 2006	Jan. 1, 2007

File Name 80163 Special Provision Title
Water Blaster with Vacuum Recovery

New Location Articles 783.02 and 1101.12 Effective April 1, 2006 Revised Jan. 1, 2007

The following special provisions require additional information from the designer. The additional information needs to be included in a separate document attached to this check sheet. The Project Development and Implementation section will then include the information in the applicable special provision. The Special Provisions are:

- Building Removal-Case I
- Building Removal-Case II
- Building Removal-Case III
- Building Removal-Case IV
- Completion Date
- Completion Date Plus Working Days
- DBE Participation
- Material Transfer Device

- Railroad Protective Liability Insurance
- Right-of-Entry Permit
- Training Special Provisions
- Working Days

STATE OF ILLINOIS

SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for the Road and Bridge Construction," adopted January 1, 2007; "Supplemental Specifications and Recurring Special Provisions," adopted January 1, 2009 (as indicated on the check sheet included herein); and the latest edition of the "Illinois Manual on Uniform Traffic Control Devices for Streets and Highways", the latest edition of the "Standard Specifications for Water and Sewer Main Construction in Illinois", and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids. These Special Provisions included herein apply to and govern the construction of Section 06-00025-01-BT: the Old Route 66 Prairie Trail (Bike Trail) in the City of Chenoa, McLean County, Illinois. In case of conflict with any part or parts of said specifications, said Special Provisions shall take precedent and shall govern.

INTENT OF PROJECT

The intent of this project is to build a multi-use bike trail that will offer pedestrians and cyclists with a safer route linking them to multiple existing city parks, which have a variety of recreational activities. The trail creates a safe path for pedestrians and cyclists to school, to the library, to church, and to stores. The trail will offer parking, seating, and scenic interests.

DESCRIPTION OF WORK

This work consists of improvements on Old Route 66 from TR 3000N to a commercial entrance north of U.S. Route 24, which is approximately 5,948.34 feet from Station 10+47.22 to Station 69+95.56. Included in the work is earth excavation, embankment, milling, aggregate base course, hot-mix asphalt shoulders, hot-mix asphalt surface course, topsoil excavation and placement, erosion control, seeding, fertilizer, mulch, pavement markings, signing, traffic control, and all necessary incidental work as shown on the plans or as described herein.

EXAMINATION OF EXISTING CONDITIONS AND EXISTING CONDITION DOCUMENTATION

It is the responsibility of each bidder to satisfy himself/herself as to conditions he/she will encounter in performing the work. Failure to do so will not be considered as grounds for additional compensation for unforeseen adverse conditions encountered during the progress of the work.

Prior to commencement of any construction activities, the Contractor shall document the existing condition of all items within or adjacent to the limits of construction with color photographs and submit said pictures to the Engineer for review. Construction shall not commence until the content and clarity of said pictures is reviewed by the Engineer and found acceptable. This work shall not be paid for separately but shall be incidental to the contract work and no additional compensation will be allowed.

CONSTRUCTION LAYOUT

Construction Layout and Staking will be provided by the City of Chenoa separate from this contract.

EARTH EXCAVATION

This work shall be performed in accordance with the applicable articles of Section 202 of the Standard Specifications.

The removal of all asphalt pavement or shoulders shall be considered Earth Excavation. No separate pay item is included in this contract for removing asphalt pavement on a flexible base. The pipe culverts, storm sewers, or manholes shown on the plans to be removed shall not be paid for separately but shall be included in the cost of EARTH EXCAVATION.

Add the following provision to Section 202: (Topsoil material suitable for growing grass shall be excavated and stockpiled within the right-of-way or other approved location on the development site for Topsoil Placement. This excavation shall be part of the Earth Excavation quantity and work. No additional compensation will be allowed for the stockpiling work.) See Page #5

Any Earth Excavation that is suitable for fill embankment material shall be placed and compacted in fill areas as shown on the cross sections. All unsuitable material shall be the property of the Contractor and be removed from the site. No payment for overhaul will be allowed for earth moved from any source.

Should the Contractor have any disagreement in the quantity of the Earth Excavation, Topsoil, Embankment, or Furnished Excavation, he/she shall submit earthwork calculations showing such disagreement at the pre-construction meeting. Otherwise, the plan quantities for Earth Excavation, Embankment, Topsoil and Furnished Excavation shall be used as the basis for payment on the project, as long as the project is constructed according to plan grades. Cross Sections after clearing and ground surface preparation will not be provided or allowed. Changes in the lines, grades, or length of the project may result in changes to the quantities.

REMOVAL OF UNCLASSIFIED MATERIAL

Existing hazard markers, delineators, and other unclassified materials shall be removed at the locations shown on the plans or as designated by the Engineer. The material removed, as required in this Special Provision, shall be disposed of outside the right-of-way limits in accordance with Article 202.03 of the Standard Specifications. The Engineer shall be notified before any of these items are removed.

Where right-of-way, U.S.C. & G.S. markers, or section and sub-section monuments are encountered, the Engineer shall be notified before such monuments are removed. The contractor shall protect and carefully preserve all markers and monuments until the Engineer or authorized Land Surveyor has witnessed and referenced their location. The Contractor will be responsible for reimbursing the Engineer's Registered Land Surveyor for all costs associated with reestablishing any markers or monuments destroyed by his/her operations.

SIGNS TO BE MOVED

All existing signs, which interfere with the work, shall be removed and temporarily reset by the Contractor after notifying the City of the sign conflict. Every sign removed must be re-erected at a temporary location in a workmanlike manner and be visible to roadway traffic. Signs shall not be moved other than laterally without the permission of the Engineer. All such signs must be

2

maintained straight and neat for the duration of the temporary setting. Upon completion of the work, the signs shall be returned to the proper location and reinstalled in a workmanlike manner. Signs shall not be moved until the progress of work requires it. Signs broken or damaged during moving shall be replaced or repaired to their original condition at the Contractor's expense. Any Contractor or Private Party removing any sign without notice will be billed for the replacement costs associated with reinstalling of the sign and may be charged with a violation of the Illinois Vehicle Code 11-311.

The regulatory and street signs located near U.S. Route 24 shall be moved permanently as shown in the plan details.

This work shall not be measured for payment separately, but shall be included in the contract unit price bid per cubic yard for EARTH EXCAVATION, and no additional compensation will be allowed.

SIGNS TO BE REMOVED

Signs to be removed, including their posts, shall be removed and delivered to the City Street Department Garage and placed in a location approved by the City. The Contractor shall remove signs in a manner that causes little or no damage to signs.

This work will not be paid for separately but shall be included in the contract unit price bid per cubic yard for Earth Excavation, and no additional compensation will be allowed.

EMBANKMENT

Embankment shall be placed in accordance with Section 205 of the Standard Specifications except as follows:

- (1) The embankment material shall not be placed and compacted at moisture contents in excess of 110 percent of optimum moisture unless authorized in writing by the Engineer.
- (2) All existing earth surfaces to receive embankment placement shall be disked and compacted in accordance with Articles 205.01 through 205.09 of the Standard Specifications. These surfaces shall be reviewed by the Engineer prior to placement of any Embankment. Existing surfaces that have been compacted, but do not meet the satisfaction of the Engineer, shall be test rolled. If the existing surface does not pass the test roll, the material shall be removed and replaced with Embankment or Sub-base Granular Material as determined by the Engineer. Removal of unsuitable existing surface will not be measured for payment.
- (3) Embankment shall not be placed on slopes steeper than 4:1 slope. Slopes steeper than 4:1 shall be stepped and compacted prior to placing embankment. No additional compensation shall be allowed for stepping.
- (4) If the Contractor fails to obtain the Engineer's satisfaction of the existing surface after disking and compacting, any Embankment placed on said surface shall be the sole responsibility of the Contractor. Should the Embankment so placed not pass the test roll prior to pavement placement, the Contractor shall repair or replace said Embankment at the Contractor's own expense.
- (5) Cross Sections after clearing and ground surface preparation will not be provided or allowed.

SUBGRADE PREPARATION

The Contractor shall be required to complete this work strictly in accordance with Section 301 of the Standard Specifications except as modified below.

Subgrade Preparation shall not be measured and paid for separately, but shall be included in the unit cost for the applicable pay items including aggregate base, curb and gutter, and hot-mix asphalt pavements

TEST ROLLING OF SUBGRADE AND BASE COURSE

The test rolling of subgrade and base course shall follow the May 1, 2005 edition of the Subgrade Stability Manual.

The Contractor will provide, at his/her own expense, a loaded truck and test roll the compacted subgrade and base course in the presence of the Engineer before any sub-base, curb and gutter, base, binder, or surface material is placed. The Contractor shall notify the Engineer three business days prior to the test roll. The tandem axle truck shall be loaded to a minimum gross weight of 40,000 pounds. The Contractor shall provide the Engineer a weight ticket verifying this amount prior to operations. The test roll will be in addition to the requirements of Section 301 of the Standard Specifications. The density requirements of Section 301 will still be required.

The truck shall make four to six (4-6) passes over the entire subgrade, sub-base, or base course area to be tested. Any areas which show rutting, cracking or rolling of the compacted subgrade, sub-base, or base course upon test rolling will not be accepted. The Contractor will recompact and/or reconstruct the section that fails and test roll again prior to acceptance. Areas of subgrade repair will be paid for as specified in the Special Provision for Granular Subgrade Repair or Replacement. No additional compensation shall be allowed for any test rolling of repaired areas or the reconstruction or repair of the aggregate sub-base or base course.

GRANULAR SUBGRADE REPAIR OR REPLACEMENT

Description: This work shall be completed in accordance with Section 311 of the Standard Specifications except as modified by the following:

This work, as provided for herein, shall consist of providing all materials, equipment and labor for the removal of unsuitable material and the placement of Geotechnical Fabric and/or Granular Blanket in subgrades or embankment foundations. Following topsoil excavation and roadway excavation to the lines and grades shown on the plans and preparing the subgrade in accordance with the Special Provisions, the Resident Engineer shall determine the limits of the area requiring repair or replacement and so advise the Contractor of the approximate quantities. It is hereby understood that the Contractor shall notify the Engineer not less than forty-eight (48) hours (5:00 p.m. Friday to 8:00 a.m. Monday excluded) prior to any undercutting of the sub-base or subgrade.

Placement of Granular Blanket: The Sub-base Granular Material, Type B shall be CA-6 or CA-10 in accordance with Article 1004.04 of the Standard Specifications.

Method of Measurement and Payment: Any subgrade excavation of unstable or unsuitable material to complete this work shall not be measured and paid for separately, but shall be included in the unit price for SUB-BASE GRANULAR MATERIAL, TYPE B.

The Granular Blanket will be measured for payment in tons as shown on the plans and will be paid for at the contract unit price per ton for SUB-BASE GRANULAR MATERIAL, TYPE B. GEOTECHNICAL FABRIC FOR GROUND STABILIZATION shall be paid at the contract unit price bid per square yard.

All areas of repair shall be re-test rolled to confirm stability. All costs for re-test rolling shall be included in the contract unit price bid per ton for SUB-BASE GRANULAR MATERIAL, TYPE B.

ADJUSTMENT OF QUANTITIES FOR SUBGRADE TREATMENTS

The quantities for Sub-base Granular Material and Geotechnical Fabric for Ground Stabilization have been estimated in order to establish a unit bid price. No change in contract unit price will be allowed because of an adjustment of these quantities due to actual conditions encountered in the field.

TOPSOIL EXCAVATION AND PLACEMENT

Revise Article 211.07(b) to read: In cut and fill sections, the disturbed areas not improved with pavement, shoulders or sidewalk will require 4 inches of Topsoil. Topsoil material suitable for growing grass shall be excavated and stockpiled within the right-of-way or other approved location for Topsoil Placement. Excavating and stockpiling of suitable topsoil material shall be considered Earth Excavation and paid for as Earth Excavation. Any holes or depressions made while excavating topsoil from within the project site shall be filled and graded by the Contractor. No additional compensation shall be allowed for filling holes due to topsoil excavation. All costs associated with providing Topsoil from the stockpiled location and placing Topsoil in the areas designated on the plans will be paid for at the contract unit price bid per cubic yard for TOPSOIL EXCAVATION AND PLACEMENT.

Locations and quantities for turf shoulders to be paid for separately are included in the schedule of quantities under Topsoil Excavation and Placement and Seeding Class, 2 Special. All other turf shoulder work shall be the responsibility of the contractor. Any turf shoulder repair deemed necessary and requested by the Engineer in addition to what is included in the schedule of quantities shall be included in the unit price bid per cubic yard for TOPSOIL EXCAVATION AND PLACEMENT.

TEMPORARY EROSION CONTROL

Temporary erosion control systems and maintenance shall be the responsibility of the Contractor. The Contractor shall follow the Erosion Control Plan as shown in the plans and in these special provisions. Systems utilized for temporary erosion control shall be in accordance with Standard 280001-04. Inlet and Pipe Protection shall be placed at all pipes and inlets, and Perimeter Erosion Barrier shall be placed to prevent silt from leaving the project limits. Upon completion of the project, all materials used for temporary erosion control shall be removed by the Contractor and become the property of the Contractor. The Contractor shall also be responsible for maintaining and replacing as needed the Temporary Erosion Control items during this project and prior to acceptance of the project. Additional payment will not be made for maintenance or necessary replacement of Temporary Erosion Control items that may be required during this project.

The Contractor shall certify and follow the Storm Water Pollution Prevention Plan included with these Special Provisions. Signed copies of the Contactor Certification Statement included with the

5

SWPPP shall be provided to the City and the Engineer at the Pre-Construction Meeting. The City will complete and submit the Notice of Intent (NOI), pay necessary fees, and complete and submit Notice of Termination (NOT) for the NPDES permit.

SEEDING, CLASS 2 SPECIAL

All earth and turf shoulder surfaces disturbed by the Contractor shall be seeded in accordance with Section 250 and mulched in accordance with Section 251, Method 2 Procedure 2 of the Standard Specifications. All areas shall receive Seeding, Class 2 Special. Fertilizer nutrients, limestone, and mulch shall be applied as hereinafter specified except that the fertilizer nutrients, limestone, and mulch will not be paid for separately but shall be included in the contract unit bid price for Seeding, Class 2 Special.

<u>Item</u>	Application Per Acre
Seeding, Class 2 Special	Class 2
Nitrogen Fertilizer Nutrient	90 LB
Phosphorus Fertilizer Nutrient	90 LB
Potassium Fertilizer Nutrient	90 LB
Mulch, Method 2 Procedure 2	2 Tons

Spring seeding shall be completed between April 1st and June 1st. Fall seeding shall be completed between August 15th and September 30th.

This work shall be measured and paid at the contract unit price bid per acre for SEEDING, CLASS 2 SPECIAL.

EXPLORATORY EXCAVATION

Wherever, in the opinion of the Engineer, it is necessary to explore and excavate to determine the location and elevation of existing utilities, culverts, storm sewer, field tiles, or other underground items, the Contractor shall make exploration and excavation for such purposes. The cost of exploratory excavation will not be paid for separately, but shall be included with the cost of HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N30.

TREATMENT OF EXISTING TILE OR SUMP DRAIN LINE SYSTEMS

This work shall be performed in accordance with Section 611 of the Standard Specifications. All tile or sump drain line repairs shall be made with Storm Sewer (Special) as noted in Section 611 and concrete collars as detailed in the plans or other approved connections. Additionally, Storm Sewer (Special) shall be PVC Pipe SDR 26 a minimum of two inches (2-in.) diameter larger than the existing tile or sump drain line.

This work shall be measured and paid for at the contract unit price per foot for Storm Sewer (Special) of the diameter specified or per each for Field Tile Junction Vaults of the sizes specified by the Engineer. All Storm Sewer (Special), fittings, connections, and collars shall be considered included in the unit price bid for Storm Sewers (Special). Quantities for Storm Sewers (Special), Miscellaneous Concrete, and Field Tile Junction Vaults are estimated. No change in unit price will be allowed for additions or deletions of the quantity listed.

CONCRETE COLLAR

A Concrete Collar shall be constructed in accordance with the detail as shown on the plans where storm sewer or pipe culverts of differing pipe types connect. This work shall not be paid for separately, but shall be included in the contract unit price bid per foot for the various storm sewer and pipe culvert sizes.

TRENCH BACKFILL

Material for Trench Backfill shall comply with Article 1003.04 of the Standard Specifications. Bedding material shall conform to Article 1003.04. Compaction of the trench shall be accomplished by Method 1 as noted under article 550.07 of the Storm Sewer Section. This work shall be included in the contract unit price bid for PIPE CULVERTS, CLASS D, TYPE 1 of the size specified.

FLY ASH IN MIX FOR COMBINATION CONCRETE CURB AND GUTTER

Fly Ash will not be allowed in the concrete curb and gutter concrete mix on this project. Any other references allowing Fly Ash in the concrete mix for curb and gutter shall not apply.

COMBINATION CONCRETE CURB AND GUTTER

This work shall be performed in accordance with Section 606 of the Standard Specifications, the plan details, and as noted herein. Proposed curb and gutter work shall be in accordance with Standard 606001-04 including 1.5-inch diameter dowel bar placement. The existing subgrade shall be graded, leveled, and thoroughly compacted. The subgrade and proposed aggregate base course where shown on the plans under and behind the proposed curb shall be required to pass a test roll prior to new curb being placed. The Combination Concrete Curb and Gutter shall be sawed or scored at intervals coinciding with the joint intervals of the adjoining concrete pavement. Expansion joints in curb and gutter shall correspond to location of expansion joints in pavement. If adjacent pavement is not a concrete pavement, maximum spacing of saw joints shall be 15 feet. Expansion joints with dowel bars in curb and gutter shall be placed at all RPC's and all construction joints as shown on plan details. The minimum joint depth of the gutter shall be 2 inches and on the curb shall be 1 inch. Two No. 4 reinforcing bars shall be placed across all water or sewer trench crossings. These bars shall be a minimum of 10 feet long and shall be long enough to obtain at least 2 feet of embedment on either side of trench.

The sawing of the curb and gutter shall commence within four hours of the start of placing concrete unless otherwise approved by the Engineer. Sawing shall continue until all the joints are completed or until sunset, whichever comes first. If all joints are not completed by sunset, sawing shall commence at sunrise and continue to completion.

All costs shall be included in the contract unit price bid per foot for COMBINATION CONCRETE CURB AND GUTTER of the type specified.

COMBINATION CONCRETE CURB AND GUTTER TYPE B (SPECIAL)

This work shall be performed in accordance with Section 606 of the Standard Specifications, Standard 606001-04, the plan details, and as specified herein. The gutter width of

7

COMBINATION CONCRETE CURB AND GUTTER TYPE B (SPECIAL) will vary. The Contractor shall be responsible for matching the gutter width to tie into the existing edge of pavement as shown in the plan details. All costs to complete this work shall be included in the contract unit price bid per foot of COMBINATION CONCRETE CURB AND GUTTER of the type specified.

EXPANSION JOINTS

One-inch expansion joints will also be required at RPC's, P.C.'s and P.T.'s in curb and gutter. Joints in curb and gutter shall be made with bituminous pre-molded joint filler. The cost of the expansion joints shall be included in the contract unit price bid per foot of COMBINATION CONCRETE CURB AND GUTTER of the type specified.

SAW JOINTS

This work shall include sawing existing pavement or other existing improvements where this proposed project will match to existing. All work shall be performed in accordance with Section 440 of the Standard Specifications. Saw joints will not be paid for separately but shall be incidental to the Contract work.

Saw joints for improvements including curb and gutter shall be included in the unit cost of those pay items. No separate payment shall be made for saw joints on existing surfaces or new surfaces.

WOOD BOLLARD

This work shall consist of all materials, equipment, labor and work to furnish and install wood bollards. Wood bollards shall be installed in accordance to the details in the plans and the specification described herein. Each wood bollard shall be one (1) solid post six (6) feet long and twelve (12) inches by twelve (12) inches in width pressure treated wood. All wood bollards installed on this project shall be of similar properties, especially appearance. Wood bollards shall be placed in accordance to Articles 1007.09 and 1007.13 of the Standard Specifications. CA-7 aggregate shall be rodded into place around bollards to the depth specified in the plan details. A concrete collar using Class SI concrete shall be placed around the bollard as shown in the plan details. The bollard shall have two (2) holes two (2) inches in diameter drilled perpendicular to each other at six (6) inches and two (2) inches from the proposed hot-mix asphalt surface elevation. The bollard shall stand plum and square to the trail after completion. This work, including all materials shown above, shall be measured and paid for at the contract unit price bid per each for WOOD BOLLARD.

CONCRETE PARKING BLOCKS

This work shall consist of all materials, equipment, labor and work to furnish and install precast concrete parking blocks as shown in the plan details and the specification described herein. The Contractor should handle and store concrete parking blocks with care. The City or Engineer may reject any concrete blocks displaying cracks, chips, honeycomb, or other damage. Precast concrete parking blocks shall be secured in place with tie rods according to the manufacturer's recommendation. Payment of Concrete Parking Blocks will not be made until final installation of

8

block is made without damage. This work shall be measured and paid for at the contract unit price bid per each for CONCRETE PARKING BLOCKS.

APPLICATION OF PRIME COAT

Prime coat on aggregate surfaces shall be MC-30 and shall be applied at the rate of 0.40 gallons per square yard or as determined by the Engineer.

AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A

This work shall be performed in accordance with Section 443 of the Standard Specifications and as shown in the plans. The Contractor is reminded that the surface on which the reflective crack control treatment is to be constructed shall be clean and dry. All dirt, debris and loose material shall be cleaned from the surface by the Contractor at his/her expense. The Contractor shall repair any damaged areas, including tears and wrinkles, of the area reflective crack control treatment due to traffic or his/her construction operations at his/her own expense. The AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A shall be placed on the milled surface. Hot-Mix Asphalt Surfacing shall not be placed on the same day as Area Reflective Crack Control Treatment, System A.

No change in contract unit bid price for Area Reflective Crack Control Treatment, System A shall be allowed for additions or deletions from the estimated quantities.

HOT-MIX ASPHALT SURFACE COURSE GENERAL CONDITIONS

In addition to the weather and temperature limitations specified in Article 406.06 of the Standard Specifications that will be enforced, in the event of sudden rain, loading additional trucks shall immediately stop whether it be from the plant or storage bins.

Material in transit will be permitted to be laid at the Contractor's risk providing the pavement is free of standing water and the proper temperature of the asphalt mix is maintained. Approval to unload the trucks in transit shall in no way relax the requirements for quality, density or smoothness of the hot-mix asphalt mixture being placed.

The hot-mix asphalt shall be constructed so that at the end of each day's operation, the entire width of the pavement, or as near as possible, shall be covered.

Width extensions on the hot mix asphalt paver shall be equipped with a heated, activated screed or strike-off assembly. Width extensions without a screed or strike-off assembly will not be permitted.

TRAFFIC CONTROL COMPLETE

Traffic Control shall be in accordance with the applicable sections of the Standard Specifications, the applicable guidelines contained in the "Manual on Uniform Traffic Control Devices for Streets and Highways," these Special Provisions, and any special details and Highway Standards herein and in the plans.

Access to sideroads and entrances along the trail shall not be closed overnight and shall have at least one lane open to traffic and emergency vehicles at all times.

Special attention is called to Articles 107.09, 107.14, 107.15, and 107.25 and Sections 701, 703, 783 and 1106 of the Standard Specifications, and the following Highway Standards relating to traffic control.

The Traffic Control Standards that are included in this set of plans are listed below:

701001-02	701006-03	701201-03
701011-02	701301-03	701311-03
701901-01		

In addition, the following Special Provisions also govern traffic control for this project:

Sequence of Operations Relocating Street Signs Recurring Local Roads and Streets Special Provision Work Zone Traffic Control

All open excavation left overnight throughout this project shall be protected by fences and barricades. The Contractor shall place additional traffic control whenever conditions warrant and whenever requested by the Engineer.

All traffic control and protection, including surveillance, signs, barricades, equipment, labor, and all other control necessary to install, maintain, and remove traffic control and protection shall be included in the contract lump sum price for TRAFFIC CONTROL COMPLETE.

Any inconveniences or delays caused the Contractor in complying with this Special Provision will be considered as included in the respective contract unit price bid for TRAFFIC CONTROL COMPLETE and no additional compensation will be allowed.

SEQUENCE OF OPERATIONS

At the Pre-Construction Meeting, the Contractor shall submit to the Engineer and City for review a Sequence of Construction Operations. No deviation from the sequence will be permitted except by written permission from the Engineer and City.

All Bollards shall be placed before the hot-mix asphalt surface is placed.

STANDARDS IN THE PLANS

The Standards with the revision number listed in the Index to Sheets included in the plans shall hold precedence over Standard Numbers listed elsewhere in the plans or Special Provisions for this contract.

DAMAGE TO NEW OR EXISTING STRUCTURES OR PROPERTY

If damage is done to new or existing structures or property during construction of the proposed improvement, they shall be replaced or repaired in a satisfactory manner by the Contractor at

his/her own expense. The replacement or repair method shall be reviewed by the Engineer and approved by the City prior to replacement or repair.

UTILITIES

The utility companies have been notified of the impending project and the plans indicate the general location of the existing known utility lines. The Contractor shall have the responsibility before any construction work has begun, of obtaining from all utilities the exact location of any underground facilities in the area of construction, whether indicated on the plans or not. Any facilities disturbed by the Contractor shall be restored by him/her at his/her own expense. The Contractor shall coordinate with the proper utility the relocation of any facility designated on the plans or deemed necessary to be relocated by the Engineer or Utility Agency in order to complete construction of the project. Special attention is called to Article 107.31. Residents and businesses shall be notified of impending service outages and no residence or business shall be without service overnight.

JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS

Whenever a question arises regarding the existence or location of a buried utility, call the toll free J.U.L.I.E. telephone number, 1-800-892-0123, before starting excavation. Allow 48 hours for other than emergency assistance.

PLAN QUANTITY CALCULATION RATES

The pay item quantities shown in the plans and specifications have been calculated based on areas and locations shown on the plans. The following factors have been used to calculate the plan quantities:

Granular Materials 2.05 ton/CY
Bituminous Materials Prime Coat – MC-30 0.4 gal/SY
Hot-Mix Asphalt (All Items) 112 lbs/SY/in

CERTIFICATE OF INSURANCE

Add to the requirements of Article 107.27 of the Standard Specifications that the Contractor shall provide the policy of insurance and shall include the City of Chenoa, Illinois representatives and employees and the Farnsworth Group, Inc. as additional insured.

As required by Article 107.27, the Certified Certificate of Insurance provided by the Contractor shall also include the following statement: "The coverage and limits conform to the minimums required by Article 107.27 of the Standard Specifications for Road and Bridge Construction."

In the second to last paragraph of Article 107.27, add in the last sentence "and Farnsworth Group, Inc." after the word "Department".

Two original certificates of insurance shall be submitted by the Contractor to the Engineer at the Pre-Construction meeting. The Contractor, by entering into a contract for this project, agrees the

11

City of Chenoa, Illinois and Farnsworth Group Inc. are covered as additional insured under the Contractor's insurance policy for the duration of the contract in accordance with the provisions specified in the Special Provision.

COMMITMENTS

The Illinois Department of Transportation will retain jurisdiction of the project limits. By agreement, the City of Chenoa, Illinois will be allowed to construct and maintain the multi-use path.

12

There are no other commitments for this project.



STORM WATER POLLUTION PREVENTION PLAN

Ko	ute	Old Route 66 Prairie Trail (South)	Marked <u>N</u>	/A
Se	ction	06-00025-01-BT	Project No.	ARA-HD-0113(029)
Со	unty	McLean		
I consupervate system	e Illino ertify pervis aluate stem, best nalties	Un W- Rose	scharges from Construments were prepared eat qualified personnel of the person or persinformation, the information, the information aware the	uction Site Activities. under my direction o properly gathered and ons who manage the mation submitted is, to at there are significan
	Signature Date Senior Engineer Title Site Description			
1.	Site a.	Description The following is a description of the construction ac additional pages, as necessary): Work items include curb removal; earth excavation; Harkings, and all other necessary incidental work for construction.	IMA resurfacing; curb	and gutter; pavement
	b.	The following is a description of the intended sequenter for major portions of the construction site, such as gradditional pages, as necessary):	ce of major activities v	vhich will disturb soils
		The intended sequence of work shall begin with the pitems followed by topsoil removal, earth excavation, eachecks and other erosion control items as necessary, and gutter placement, Hot-Mix Asphalt paving, and personal control items.	embankment, tempora , subgrade improvema	rv seedina, ditch
	c.	The total area of the construction site is estimated to the site that it is estimated will be disturbed by excava 1.9 acres.+		es. The total area of activities is
	_			

- d. The estimated runoff coefficients of the various areas of the site after construction activities are completed are contained in the project drainage study, which is hereby incorporated by reference in this plan. Information describing the soils at the site is contained either in the Soils Report for the project, which is hereby incorporated by reference, or in an attachment to this plan.
- e. The design/project report, hydraulic report, or plan documents, hereby incorporated by reference, contain site map(s) indicating drainage patterns and approximate slopes anticipated after major grading activities, areas of major soil disturbance, the location of major structural and nonstructural controls identified in the plan, the location of areas where stabilization practices are expected to occur, surface waters (including wetlands), and locations where storm water is discharged to a surface water.
- f. The names of receiving water(s) and areal extent of wetland acreage at the site are in the design/project report or plan documents which are incorporated by reference as a part of this plan.

2. Controls

This section of the plan addresses the various controls that will be implemented for each of the major construction activities described in 1.b. above. For each measure discussed, the contractor that will be responsible for its implementation is indicated. Each such contractor has signed the required certification on forms which are attached to, and a part of, this plan:

a. Erosion and Sediment Controls

- (i) Stabilization Practices. Provided below is a description of interim and permanent stabilization practices, including site-specific scheduling of the implementation of the practices. Site plans will ensure that existing vegetation is preserved where attainable and disturbed portions of the site will be stabilized. Stabilization practices may include: temporary seeding, permanent seeding, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, preservation of mature vegetation, and other appropriate measures. Except as provided in 2.a.(i).(A) and 2.b., stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, but in no case more than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased on all disturbed portions of the site where construction activity will not occur for a period of 21 or more calendar days.
 - (A) Where the initiation of stabilization measures by the 14th day after construction activity temporarily or permanently ceases is precluded by snow cover, stabilization measures shall be initiated as soon as practicable thereafter.

14

Description of Stabilization Practices (use additional pages, as necessary): The perimeter erosion barrier, temporary erosion control seeding, inlet and pipe protection, ditch checks, permanent seeding, and mulch on this project will be completed at proper times as indicated above to help keep erosion to minimum.

(ii) Structural Practices. Provided below is a description of structural practices that will be implemented, to the degree attainable, to divert flows from exposed soils, store flows or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. Such practices may include silt fences, earth dikes, drainage swales, sediment traps, check dams, subsurface drains, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions and temporary or permanent sediment basins. The installation of these devices may be subject to Section 404 of the Clean Water Act.

Description of Structural Practices (use additional pages, as necessary):

As work proceeds, all storm sewer structures and all curb inlet structures will have inlet and pipe protection to help slow down any discharge and also reduce the sediment flowing into the drainage system from the structures. The upstream end of all pipe culverts and storm sewer will be protected with the temporary inlet and pipe protection to keep silt from washing through the new structures. The temporary inlet and pipe protection units will be periodically cleaned and maintained by the Contractor.

All field tile exposed for more than one day's work will be protected with inlet and pipe protection in order to prevent silt from causing blockage.

Swales will be cut in the fill sections at the low spots to maintain drainage over the course of the project. It should be noted that locations where water will flow from the fill areas to the natural waterways shall be protected with perimeter erosion barrier and installed by the Contractor.

b. Storm Water Management

Provided below is a description of measures that will be installed during the construction process to control pollutants in storm water discharges that will occur after construction operations have been completed. The installation of these devices may be subject to Section 404 of the Clean Water Act.

(i) Such practices may include: storm water detention structures (including wet ponds); storm water retention structures; flow attenuation by use of open vegetated swales and natural depressions; infiltration of runoff on site; and sequential systems (which combine several practices). The practices selected for implementation were determined on the basis of the technical guidance in Section 10-300 (Design Considerations) in Chapter 10 (Erosion and Sedimentation Control) of the Illinois Department of Transportation Drainage Manual. If practices other than those discussed in Section 10-300 are selected for implementation or if practices are applied to situations different from those covered in Section 10-300, the technical basis for such decisions will be explained below.

15 0081275.00

(ii) Velocity dissipation devices will be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are maintained and protected (e.g., maintenance of hydrologic conditions, such as the hydroperiod and hydrodynamics present prior to the initiation of construction activities).

Description of Storm Water Management Controls (use additional pages, as necessary):

Disturbed swales shall be protected with permanent erosion control measures as indicated on the plans and vegetated with permanent seeding.

c. Other Controls

- (i) Waste Disposal. No solid materials, including building materials, shall be discharged into Waters of the State, except as authorized by a Section 404 permit.
- (ii) The provisions of this plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.

d. Approved State or Local Plans

The management practices, controls and provisions contained in this plan will be in accordance with IDOT specifications, which are at least as protective as the requirements contained in the Illinois Environmental Protection Agency's Illinois Urban Manual, 1995. Procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials shall be described or incorporated by reference in the space provided below. Requirements specified in sediment and erosion site plans or site permits or storm water management site plans or site permits approved by local officials that are applicable to protecting surface water resources are, upon submittal of an NOI to be authorized to discharge under permit ILR10 incorporated by reference and are enforceable under this permit even if they are not specifically included in the plan.

Description of procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials:

3. Maintenance

The following is a description of procedures that will be used to maintain, in good and effective operating conditions, vegetation, erosion and sediment control measures and other protective measures identified in this plan (use additional pages, as necessary):

During construction, the Contractor shall do the following: Clean up and grade the work area to eliminate concentration of runoff. Cover the open ends of pipes in trenches at the close of each working day. Maintain or replace erosion control and sediment control items as required.

Prior to any landscaping, the Contractor shall remove and dispose of silt retained by temporary erosion control devices, check for proper installation after cleaning, and remove and replace plugged temporary erosion control devices.

All maintenance and erosion control systems will be the responsibility of the Contractor. All locations where vehicles enter and exit the construction site and all other areas subject to erosion should also be inspected periodically by the Contractor. Inspection of these areas shall be as specified below.

16 0081275.00

4. Inspections

Qualified personnel shall inspect disturbed areas of the construction site which have not been finally stabilized, structural control measures, and locations where vehicles enter or exit the site. Such inspections shall be conducted at least once every seven (7) calendar days and within 24 hours of the end of a storm that is 0.5 inches or greater or equivalent snowfall.

- a. Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles enter or exit the site shall be inspected for evidence of off site sediment tracking.
- b. Based on the results of the inspection, the description of potential pollutant sources identified in section 1 above and pollution prevention measures identified in section 2 above shall be revised as appropriate as soon as practicable after such inspection. Any changes to this plan resulting from the required inspections shall be implemented within 7 calendar days following the inspection.
- c. A report summarizing the scope of the inspection, name(s) and qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of this storm water pollution prevention plan, and actions taken in accordance with section 4.b. shall be made and retained as part of the plan for at least three (3) years after the date of the inspection. The report shall be signed in accordance with Part VI. G of the general permit.
- d. If any violation of the provisions of this plan is identified during the conduct of the construction work covered by this plan, the Resident Engineer or Resident Technician shall complete and file an "Incidence of Noncompliance" (ION) report for the identified violation. The Resident Engineer or Resident Technician shall use forms provided by the Illinois Environmental Protection Agency and shall include specific information on the cause of noncompliance, actions which were taken to prevent any further causes of noncompliance, and a statement detailing any environmental impact which may have resulted from the noncompliance. All reports of noncompliance shall be signed by a responsible authority in accordance with Part VI.G of the general permit.

The report of noncompliance shall be mailed to the following address:

Illinois Environmental Protection Agency Division of Water Pollution Control Attn: Compliance Assurance Section 1021 North Grand East Post Office Box 19276 Springfield, Illinois 62794-9276

5. Non-Storm Water Discharges

Except for flows from fire fighting activities, sources of non-storm water that is combined with storm water discharges associated with the industrial activity addressed in this plan must be described below. Appropriate pollution prevention measures, as described below, will be implemented for the non-storm water component(s) of the discharge. (Use additional pages as necessary to describe non-storm water discharges and applicable pollution control measures).

17

Old Route 66 Prairie Trail South City of Chenoa, IL Section 06-00025-01-BT

The Contractor shall use oil pans and take special care to ensure there are no spills or discharges of any oil or fuel on the construction site. All concrete washout areas are to be confined and bedded with a non-permeable tarp to keep diffusion into the soil from occurring. All curing compounds will be stored in non-glass containers, and in areas where a vapor barrier is present between the container and ground in case of spillage.

0081275.00

18



Contractor Certification Statement

This certification statement is a part of the Storm Water Pollution Prevention Plan for the project described below, in accordance with NPDES Permit No. ILR10, issued by the Illinois Environmental Protection Agency on May 14, 1998.

Project Info	ormation:		
Route	Old Route 66 Prairie Trail (South)	Marked	d N/A
Section	06-00025-01-BT	Project	No. ARA-HD- 0113(029)
County	McLean		
Elimination	der penalty of law that I understand the terms of System (NPDES) permit (ILR 10) that authorically from the construction site identified as p	izes the storm water dischar	utant Discharge ges associated with
-	Signature		Date
	Title		
-	Name of Firm		
<u>-</u>	Street Address	<u> </u>	
_	City St	tate	
-	Zip Code	•	
-	Telephone Number		

19 0081275.00

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY NOTICE OF INTENT (NOI) GENERAL PERMIT TO DISCHARGE STORM WATER

CONSTRUCTION SITE ACTIVITIES

OWNE	RINFORMATI	ON										
NAME:	City of Chenoa	FIRST		MIDDLE	(OR COMPA	NY NAME)	0/	WNER TY	PE: City	· · · · · · · · · · · · · · · · · · ·		
MAILING ADDRESS:	201 Green St., P.	O. Box 167				•		·				
CITY:	Chenoa		·			ST	TATE:	L	ZIP: 6	1726		
CONTACT PERSON:	Eric Rhoda					TELEP	HONE FR:	ARE 81:	EA CODE	NUMI Q45	BER -3511	1
CONTR	ACTOR INFO	RMATIO	N			1				1040	001	<u></u>
NAME:	LAST	FIRST	MIDDL	Æ	(OR COMPANY NAME)	TELEP		ARE	A CODE	NUM	BER	
MAILING ADDRESS:			СІТ	1				STAT	E:	ZIF	P:	
CONST	RUCTION SIT	E INFOR	MATIO	N								
SELECT ONE:	l				RMIT NO. ILR10							
FACILITY NAME:	Route 66 Prairie Tr	ail			OTHER NPDES PERMIT NOS.:		- "					
FACILITY LOCATION:	Old Route 66 From	US Rte. 24	to Livingsto	on/McL	ean County Line	TELEP		ARE	A CODE	NUME	BER	
CITY: Cher	noa	ST:	IL ZIP:	61726	LATITUDE: 40°	44'	20"	LONG	ITUDE:	88°	43'	49"
	McLean County				CTION: 2	TOWN	SHIP:	26N	RA	NGE:	4E	
APPROX. CO START DATE	: 07 / 30 / 0	, END DV.	X. CONSTRU TE:		09 / 15 / 09				STRUC		1.7	
construction.)	ER POLLUTION PREVEN	NTION PLAN CO	OMPLETED [√ YES	☐ NO (If no, separat	e notificat	ion requ	ired to	Agency	prior to		
TYPE O	F CONSTRUC											
Transportati		overlay, and		on of P	arking lot for an A	ctivity T	rail					
HISTOR	IC PRESERV	ATION A	ND FNI	DANC	FRED SPE	CIES	CON	/IPI	ΙΔΝΟ	`F		
HAS THIS PR	OJECT SATISFIED APPL HISTORIC PRESE ENDANGERED SP	ICABLE REQU RVATION	IREMENTS I ☑ YE ☑ YE	FOR COI :S	MPLIANCE WITH ILLII NO	NOIS LAV	WON:		17 111 0	<u> </u>		
RECEIV	ING WATER I	NFORMA	ATION	:8	UNO							
DOES YOUR	STORM WATER DISCHA OF THE STATE OR		Y TO:	OWNER	OF STORM SEWER	SYSTEM	l:		-			
	DSEST RECEIVING WAT		ry of Rook	s Creel				_				
I certify under designed to as manage this si belief, true, ac imprisonment. plan and a mor	penalty of law that this do scure that qualified persor ystem, or those persons curate, and complete. I a In addition, I certify that nitoring program plan, will	cument and all a nnel properly ga directly respons am aware that to the provisions of be complied wi	attachments valther and evalible for gathe here are sign of the permit, th.	were prepluate the pring the ifficant peringling including	pared under my direction information submitted information, the information submitting the development and	. Based a	on my ir omitted i	iquiry o s, to the	of the pe e best o	rson or f my kr	perso nowled	ns who ige and
OWNER SIGN	ATURE:				DATE:				E USE (ONLY		
MAIL COMPLE	ETED FORM TO:	ILLINOIS EN	NVIRONMEN F WATER PO	TAL PRO	TECTION AGENCY N CONTROL		LOG:					
(DO NOT SUB	MIT ADDITIONAL TION UNLESS	POST OFFI	MIT SECTION CE BOX 1927	N 76			PERMI	T NO. I	ILR10			
REQUESTED)	TION DIVILOS	SPRINGFIE www.epa.sta	LD, ILLINOIS ate.il.us	62794-9	2 276		DATE:	_				
Information requires	hy this form must be provided to			· <u></u>								

Information required by this form must be provided to comply with This form has been approved by the Forms Management Center.

IL 532 2104 --WPG-623-Rev:-6/03-

INSTRUCTIONS FOR COMPLETION OF CONSTRUCTION ACTIVITY NOTICE OF INTENT (NOI) FORM

Please adhere to the following instructions:

Submit original, photocopy or facsimile copies. Facsimile and/or photo copies should be followed-up with an original signature copy as soon as possible. Please write "copy" under the "For Office Use Only" box in the lower right hand corner.

· · · Submit completed forms to:

Illinois Environmental Protection Agency Division of Water Pollution Control Permit Section Post Office Box 19276 Springfield, Illinois 62794-9276 or call (217)782-0610 www.epa.state.il.us

- ···· Reports must be typed or printed legibly and signed.
- Any facility that is not presently covered by the ILR10 Construction Activity Storm Water Discharge General Permit is considered a new facility.
- •••• If this is a change in your facility information, renewal, etc., please fill in your permit number on the appropriate line.
- NOTE: FACILITY LOCATION IS NOT NECESSARILY THE FACILITY MAILING ADDRESS, BUT SHOULD DESCRIBE WHERE THE FACILITY IS LOCATED.
- •••• Use the formats given in the following examples for correct form completion.

e.	Example	<u>Format</u>
SECTION	12	1 or 2 numerical digits
TOWNSHIP	12N	1 or 2 numerical digits followed by "N" or "S"
RANGE	12W	1 or 2 numerical digits followed by "E" or "W"

- •••• For the Name of Closest Receiving Waters, do not use terms such as ditch or channel. For unnamed tributaries, use terms which include at least a named main tributary such as "Unnamed Tributary to Sugar Creek to Sangamon River."
- Submit a fee of \$500 prior to the Notice of Intent being considered complete for coverage by the ILR10 General Permits. Please make checks payable to: Illinois EPA

NOTICE OF TERMINATION (NOT)

OF COVERAGE UNDER THE GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION SITE ACTIVITIES

Please use the tab or arrow keys

OWNER	INFORMATION														
NAME:	City of Chenoa							OWNER TYPE: City							
MAILING ADDRESS:	201 Green St., P.O. Bo	ox 167				1,1,			<u></u>						
CITY:	Chenoa		STATE	: IL					ZIF	P:	617	26			
CONTACT PERSON:	Eric Rhoda							EPHO			REA CO	DE	мимве 945-		
CONTRA	ACTOR INFORM	IATION													
NAME:	LAST	FIRST		MID	DLE			EPHO (BER:		AF	REA COI	DE	NUMBE	R	
MAILING ADDRESS:				CITY:			LINON	MDER.		_I_ STA	TE:	L	ZI	 P:	
					l										
CONST	RUCTION SITE I	NFORMAT	ION			·									
FACILITY NAME: Ro	oute 66 Prairie Trail		ОТНЕ	R NPDE	S PE	RMIT NOS.:	1	L	R	1	0				
FACILITY LOCATION:	Old Route 66 From US	Rte. 24 to Livin	aston/	Mcl ea	n Co	ounty Line				L <u>.</u>					
CITY: Chend		STATE: IL	ZIP:	61726		LATITUDE:	40	44	120	, T.	ONICI	TUD	00	140	10
COUNTY: N	McLean		1	SECTION		2	1.0	VNSHI	20		ONG!	<u> </u>		1	49
								VINOTII	r.	26N		RANG	·E:	4E	
DATE PROJEC	OT HAS BEEN COMPLETED	AND STABILIZED):												
<u> </u>															
I certify under	r penalty of law that distu	rhad soils at tho	idontifi	ad faaili	4. L.										
	r penalty of law that distu industrial activity from the t by submitting this notice														
activity by the	general permit, and that of the Environmental Protection	lischarging nother	iai i aiii ante in	oform v	јега	utnorized to	aiscna	arge s	torm	wate	r ass	ociat	ed wit	h indu	
		on Aut and the Ole	all Trace	FI ACL WI	iere	the discharge	s is no	t auth	orize	ed by	an NF	PDES	permi	t.	
OWNER SIGNA	ATURE:					DATE: _									
					-	DATE: _		-14	_						
MAII COMPLE	TED FORM TO:	LINOIS ENVIRON							FOR	OFFI	CE US	SE OI	NLY		
		LLINOIS ENVIRON DIVISION OF WATE	ER POLL	L PROTE	CON	ON AGENCY TROL		-)G:						
DOCUMENTAT	TON UNLESS F	ATTN: PERMIT SEC POST OFFICE BOX	19276	070400				-		T NO.	ILR1				
,	"	PRINGFIELD, ILLI	INOIS 6	2794-927	76			DA	ATE:						
Information require	d by this form must be														
	d by this form must be provided to c form has been approved by the Forr	omply with 415 ILCS 5/3 ns Management Center.	39 (1996).	Failure to d	lo so r	may prevent this fo	orm froi	n being	proce	ssed a	nd coul	d resul	t in you	applica	ition
IL 532 2102 WPC 621 Rev. 1/04															

GUIDELINES FOR COMPLETION OF NOTICE OF TERMINATION (NOT) FORM

Please adhere to the following guidelines:

Submit original, photocopy or facsimile copies. Facsimile and/or photo copies should be followed-up with an original signature copy as soon as possible. Please write "copy" under the "For Office Use Only" box in the lower right hand corner.

· · · Submit completed forms to:

Illinois Environmental Protection Agency Division of Water Pollution Control Permit Section Post Office Box 19276 Springfield, Illinois 62794-9276 217/782-0610

- · · · Reports must be typed or printed legibly and signed.
- NOTE: FACILITY LOCATION IS NOT NECESSARILY THE FACILITY MAILING ADDRESS, BUT SHOULD DESCRIBE WHERE THE FACILITY IS LOCATED.
- •••• Use the formats given in the following examples for correct form completion.

	<u>Example</u>	<u>Format</u>
SECTION	12	1 or 2 numerical digits
TOWNSHIP	12N	1 or 2 numerical digits followed by "N" or "S"
RANGE	12W	1 or 2 numerical digits followed by "E" or "W"

- · · · Final stabilization has occurred when:
 - (a) all soil disturbing activities at the site have been completed
 - (b) a uniform perennial vegetative cover with a density of 70% of the native background vegetative cover for the area has been established on all unpaved areas and areas not covered by permanent structures,
 - (c) or equivalent permanent stabilization measures have been employed.

State of Illinois Department of Transportation Bureau of Local Roads and Streets

SPECIAL PROVISION FOR COOPERATION WITH UTILITIES

Effective: January 1, 1999 Revised: January 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

Replace Article 105.07 of the Standard Specifications with the following:

"105.07 Cooperation with Utilities. The adjustment of utilities consists of the relocation, removal, replacement, rearrangements, reconstruction, improvement, disconnection, connection, shifting, new installation or altering of an existing utility facility in any manner.

When the plans or special provisions include information pertaining to the location of underground utility facilities, such information represents only the opinion of the Department as to the location of such utilities and is only included for the convenience of the bidder. The Department assumes no responsibility in respect to the sufficiency or the accuracy of the information shown on the plans relative to the location of the underground utility facilities.

Utilities which are to be adjusted shall be adjusted by the utility owner or the owner's representative or by the Contractor as a contract item. Generally, arrangements for adjusting existing utilities will be made by the Department prior to project construction; however, utilities will not necessarily be adjusted in advance of project construction and, in some cases, utilities will not be removed from the proposed construction limits. When utility adjustments must be performed in conjunction with construction, the utility adjustment work will be shown on the plans and/or covered by Special Provisions.

When the Contractor discovers a utility has not been adjusted by the owner or the owner's representative as indicated in the contract documents, or the utility is not shown on the plans or described in the Special Provisions as to be adjusted in conjunction with construction, the Contractor shall not interfere with said utility, and shall take proper precautions to prevent damage or interruption of the utility and shall promptly notify the Engineer of the nature and location of said utility.

All necessary adjustments, as determined by the Engineer, of utilities not shown on the plans or not identified by markers, will be made at no cost to the Contractor except traffic structures, light poles, etc., that are normally located within the proposed construction limits as hereinafter defined will not be adjusted unless required by the proposed improvement.

- (a) Limits of Proposed Construction for Utilities Paralleling the Roadway. For the purpose of this Article, limits of proposed construction for utilities extending in the same longitudinal direction as the roadway, shall be defined as follows:
 - (1) The horizontal limits shall be a vertical plane, outside of, parallel to, and 600 mm (2 ft) distant at right angles from the plan or revised slope limits.
 - In cases where the limits of excavation for structures are not shown on the plans, the horizontal limits shall be a vertical plane 1.2 m (4 ft) outside the edges of structure footings or the structure where no footings are required.
 - (2) The upper vertical limits shall be the regulations governing the roadbed clearance for the specific utility involved.
 - (3) The lower vertical limits shall be the top of the utility at the depth below the proposed grade as prescribed by the governing agency or the limits of excavation, whichever is less.
- (b) Limits of Proposed Construction for Utilities Crossing the Roadway. For the purpose of this Article, limits of proposed construction for utilities crossing the roadway in a generally transverse direction shall be defined as follows:
 - (1) Utilities crossing excavations for structures that are normally made by trenching such as sewers, underdrains, etc. and all minor structures such as manholes, inlets, foundations for signs, foundations for traffic signals, etc., the limits shall be the space to be occupied by the proposed permanent construction unless otherwise required by the regulations governing the specific utility involved.
 - (2) For utilities crossing the proposed site of major structures such as bridges, sign trusses, etc., the limits shall be as defined above for utilities extending in the same general direction as the roadway.

The Contractor may make arrangements for adjustment of utilities outside of the limits of proposed construction provided the Contractor furnishes the Department with a signed agreement with the utility owner covering the adjustments to be made. The cost of any adjustments made outside the limits of proposed construction shall be the responsibility of the Contractor unless otherwise provided.

The Contractor shall request all utility owners to field locate their facilities according to Article 107.31. The Engineer may make the request for location from the utility after receipt of notice from the Contractor. On request, the Engineer will make an inspection to verify that the utility company has field located its facilities, but will not assume responsibility for the accuracy of such work. The Contractor shall be responsible for maintaining the excavations or markers provided by the utility owners. This field location procedure may be waived if the utility owner has stated in writing to the Department it is satisfied the construction plans are sufficiently accurate. If the utility owner does not submit such statement to the Department, and they do not field locate their facilities in both horizontal and vertical alignment, the Engineer will authorize the Contractor in writing to proceed to locate the facilities in the most economical and reasonable manner, subject to the approval of the Engineer, and be paid according to Article 109.04.

The Contractor shall coordinate with any planned utility adjustment or new installation and the Contractor shall take all precautions to prevent disturbance or damage to utility facilities. Any failure on the part of the utility owner, or their representative, to proceed with any planned utility adjustment or new installation shall be reported promptly by the Contractor to the Engineer orally and in writing.

The Contractor shall take all necessary precautions for the protection of the utility facilities. The Contractor shall be responsible for any damage or destruction of utility facilities resulting from neglect, misconduct, or omission in the Contractor's manner or method of execution or nonexecution of the work, or caused by defective work or the use of unsatisfactory materials. Whenever any damage or destruction of a utility facility occurs as a result of work performed by the Contractor, the utility company will be immediately notified. The utility company will make arrangements to restore such facility to a condition equal to that existing before any such damage or destruction was done.

It is understood and agreed that the Contractor has considered in the bid all of the permanent and temporary utilities in their present and/or adjusted positions.

No additional compensation will be allowed for any delays, inconvenience, or damage sustained by the Contractor due to any interference from the said utility facilities or the operation of relocating the said utility facilities.

State of Illinois Department of Transportation Bureau of Local Roads and Streets

SPECIAL PROVISION FOR INSURANCE

Effective: February 1, 2007 Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

ity of Chenoa, Illinois and	d Farnsworth Gr	oup, Inc.		 	
					-
				 	
	· · · · · · · · · · · · · · · · · · ·				

held harmless in accordance with Article 107.26.

AMERICAN RECOVERY AND REINVESTMENT ACT PROVISIONS (BDE)

Effective: April 1, 2009

Required Contract Provision to Implement ARRA Section 902:

Section 902 of the American Recovery and Reinvestment Act (ARRA) of 2009 requires that each contract awarded using ARRA funds allow the U.S. Comptroller General and his representatives with the authority to:

- "(1) to examine any records of the Contractor or any of its subcontractors, or any State or local agency administering such contract, that directly pertain to, and involve transactions relating to, the contract or subcontract; and
- (2) to interview any officer or employee of the Contractor or any of its subcontractors, or of any State or local government agency administering the contract, regarding such transactions."

Accordingly, the Comptroller General and his representatives shall have the authority and rights as provided under Section 902 of the ARRA with respect to this contract, which is funded with funds made available under the ARRA. Section 902 further states that nothing in this section shall be interpreted to limit or restrict in any way any existing authority of the Comptroller General.

Notification of the Authority of the Inspector General:

Section 1515(a) of the ARRA provides authority for any representatives of the Inspector General to examine any records or interview any employee or officers working on this contract. The Contractor is advised that representatives of the inspector general have the authority to examine any record and interview any employee or officer of the Contractor, its subcontractors or other firms working on this contract. Section 1515(b) further provides that nothing in this section shall be interpreted to limit or restrict in any way any existing authority of an inspector general.

80243

AMERICAN RECOVERY AND REINVESTMENT ACT SIGNING (BDE)

Effective: April 1, 2009 Revised: April 2, 2009

<u>Description</u>. This work shall consist of furnishing, fabricating and installing sign panels, complete with sign faces, legend, and supplemental panels according to Section 720 of the Standard Specifications and as specified herein.

<u>Materials</u>. The "Putting America to Work" sign shall be fabricated using Type AP fluorescent orange sheeting for the background material with black vinyl or black opaque ink legend, symbol and borders. The "American Recovery and Reinvestment Act" sign shall be fabricated using Type AP green sheeting for the background with Type AP white sheeting for the legend and border. A green translucent overlay film may also be used over white Type AP sheeting to fabricate the "American Recovery and Reinvestment Act" sign.

Sign Layout. See following attachment. The "Putting America to Work" sign shall be 84 in. x 18 in. The "American Recovery and Reinvestment Act" sign shall be 84 in x 60 in.

General. The signs shall be erected to applicable portions of Article 701.14 of the Standard Specifications. These signs shall be erected midway between the first and second warning signs as required by the traffic control plan and standards utilized for this project. If the second warning sign is defining a moving or intermittent operation, the sign may be maintained at a distance of 500 ft (150 m) beyond the first post mounted ROAD CONSTRUCTION AHEAD sign. The signs shall remain in place for the duration of the project. Upon completion of the project, the signs and posts shall be removed and shall remain the property of the Contractor.

<u>Basis of Payment</u>. This work will not be paid for separately but shall be included in the cost of Traffic Control items as shown on the plans.


80236

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



PROJECT FUNDING SOURCE SIGN ASSEMBLY

PROJECT FUNDING SOURCE SIGN ASSEMBLY **AMERICAN RECOVERY AND REINVESTMENT ACT** SIGN LAYOUT DETAILS

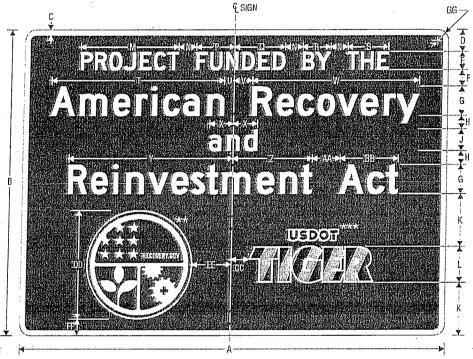

PROJECT FUNDING SOURCE SIGN

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE

Limensions	ŧ٨	inches

Limensions	an inclos												
A	В	G	D	E	F	G	. н	ل	К	L.	М	N	Į,
120	84	1.5	6 -	5 D	4.5	8.0,	3.75	G LF (45LC)	14.5	10	27,917	5 .	10.831
84	60	1	5	4 C	3.5	6 C*	3	4 (r (3 LC)	9.25	7	19.047	4	7.362
,	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,			,	- -	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
0	R	S	7	Ü	٧	W	Х	Υ	Z	AΑ	88	CC	DD
14.087	8.106	11.556	49.42	2.742	5.258	46,904	6.812	46.76	22.472	8	16.288	5	30
9.484	5.162	7.763	31.722	2.415	3,585	30.552	4.542	30.911	14.737	б	10.175	4	21

EE	FF.	GG		
11	4.5	3		
7.5	2.25	2.25		


* Increase character spacing 50%

** See Pictograph

*** See Pictograph

COLORS: LEGEND. BORDER – WHITE (RETROREFLECTIVE)
BACKGROUND – GREEN (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



NOTE: PLAQUE SHALL NOT BE INSTALLED WITHOUT SIGN

See Standard Highway Signs
 Page 6-59 for symbol design.

(Amensions in Inches

Α	В	C	D	E	F	G	Н	J,	K	l.	M	N	Р
120	24	0.625	0.875	4	6 D	22.349		17.281	13.28	G	34.22	6.5	8.765
84	· 18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843
 											i i i i i i i i i i i i i i i i i i i		

0	R	S	T	U	V	W	X	γ	Z
21.013	3	24	0.375	0.625	1,5	11	8	1.5	12
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER - BLACK

BACKGROUND — ORANGE (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



RECOVERY Vector-Based, Vinyl-Ready Pictograph

COLORS: LEGEND, OUTLINE

BORDER

BACKGROUND (UPPER)

BACKGROUND (LOWER RIGHT)

BACKGROUND (LOWER LEFT)

WHITE (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



USDOT TIGER Vector-Based, Vinyl-Ready Pictograph

- WHITE (RETROREFLECTIVE)

USDOT LEGEND — BLACK TIGER DIAGONALS — BLACK,

ORANGE (RETROREFLECTIVE)

APPROVAL OF PROPOSED BORROW AREAS, USE AREAS, AND/OR WASTE AREAS INSIDE ILLINOIS STATE BORDERS (BDE)

Effective: November 1, 2008

Revise the title of Article 107.22 of the Standard Specifications to read:

"107.22 Approval of Proposed Borrow Areas, Use Areas, and/or Waste Areas Inside Illinois State Borders."

Add the following sentence to the end of the first paragraph of Article 107.22 of the Standard Specifications:

"Proposed borrow areas, use areas, and/or waste areas outside of Illinois shall comply with Article 107.01."

CEMENT (BDE)

Effective: January 1, 2007 Revised: April 1, 2009

Revise Section 1001 of the Standard Specifications to read:

"SECTION 1001. CEMENT

1001.01 Cement Types. Cement shall be according to the following.

(a) Portland Cement. Acceptance of portland cement shall be according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Portland or Blended Cement Acceptance Procedure for Qualified and Non-Qualified Plants".

Portland cement shall be according to ASTM C 150, and shall meet the standard physical and chemical requirements. Type I or Type II may be used for cast-in-place, precast, and precast prestressed concrete. Type III may be used according to Article 1020.04, or when approved by the Engineer. All other cements referenced in ASTM C 150 may be used when approved by the Engineer.

The total of all organic processing additions shall be a maximum of 1.0 percent by weight (mass) of the cement. The total of all inorganic processing additions shall be a maximum of 4.0 percent by weight (mass) of the cement. However, a cement kiln dust inorganic processing addition shall be limited to a maximum of 1.0 percent. Organic processing additions shall be limited to grinding aids that improve the flowability of cement, reduce pack set, and improve grinding efficiency. Inorganic processing additions shall be limited to granulated blast-furnace slag according to the chemical requirements of AASHTO M 302, Class C fly ash according to the chemical requirements of AASHTO M 295, and cement kiln dust.

(b) Portland-Pozzolan Cement. Acceptance of portland-pozzolan cement shall be according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Portland or Blended Cement Acceptance Procedure for Qualified and Non-Qualified Plants".

Portland-pozzolan cement shall be according to ASTM C 595 and shall meet the standard physical and chemical requirements. Type IP may be used for cast-in-place, precast, and precast prestressed concrete, except when Class PP concrete is used. The pozzolan constituent for Type IP shall be a maximum of 21 percent of the weight (mass) of the portland-pozzolan cement.

For cast-in-place construction, portland-pozzolan cement shall not be used in concrete mixtures when the air temperature is below 40 °F (4 °C) without permission of the Engineer. If permission is given, the mix design strength requirement may require the Contractor to increase the cement or eliminate the cement factor reduction for a water-

reducing or high range water-reducing admixture which is permitted according to Article 1020.05(b).

The total of all organic processing additions shall be a maximum of 1.0 percent by weight (mass) of the cement. Organic processing additions shall be limited to grinding aids as defined in (a) above. Inorganic processing additions shall be limited to cement kiln dust at a maximum of 1.0 percent.

(c) Portland Blast-Furnace Slag Cement. Acceptance of portland blast-furnace slag cement shall be according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Portland or Blended Cement Acceptance Procedure for Qualified and Non-Qualified Plants".

Portland blast-furnace slag cement shall be according to ASTM C 595 and shall meet the standard physical and chemical requirements. Type IS portland blast-furnace slag cement may be used for cast-in-place, precast, and precast prestressed concrete, except when Class PP concrete is used. The blast-furnace slag constituent for Type IS shall be a maximum of 25 percent of the weight (mass) of the portland blast-furnace slag cement.

For cast-in-place construction, portland blast-furnace slag cement shall not be used in concrete mixtures when the air temperature is below 40 °F (4 °C) without permission of the Engineer. If permission is given, the mix design strength requirement may require the Contractor to increase the cement or eliminate the cement factor reduction for a water-reducing or high range water-reducing admixture which is permitted according to Article 1020.05(b).

The total of all organic processing additions shall be a maximum of 1.0 percent by weight (mass) of the cement. Organic processing additions shall be limited to grinding aids as defined in (a) above. Inorganic processing additions shall be limited to cement kiln dust at a maximum of 1.0 percent.

- (d) Rapid Hardening Cement. Rapid hardening cement shall be used according to Article 1020.04 or when approved by the Engineer. The cement shall be on the Department's current "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs", and shall be according to the following.
 - (1) The cement shall have a maximum final set of 25 minutes, according to Illinois Modified ASTM C 191.
 - (2) The cement shall have a minimum compressive strength of 2000 psi (13,800 kPa) at 3.0 hours, 3200 psi (22,100 kPa) at 6.0 hours, and 4000 psi (27,600 kPa) at 24.0 hours, according to Illinois Modified ASTM C 109.
 - (3) The cement shall have a maximum drying shrinkage of 0.050 percent at seven days, according to Illinois Modified ASTM C 596.

- (4) The cement shall have a maximum expansion of 0.020 percent at 14 days, according to Illinois Modified ASTM C 1038.
- (5) The cement shall have a minimum 80 percent relative dynamic modulus of elasticity; and shall not have a weight (mass) gain in excess of 0.15 percent or a weight (mass) loss in excess of 1.0 percent, after 100 cycles, according to AASHTO T 161, Procedure B.
- (e) Calcium Aluminate Cement. Calcium aluminate cement shall be used only where specified by the Engineer. The cement shall meet the standard physical requirements for Type I cement according to ASTM C 150, except the time of setting shall not apply. The chemical requirements shall be determined according to ASTM C 114 and shall be as follows: minimum 38 percent aluminum oxide (Al₂O₃), maximum 42 percent calcium oxide (CaO), maximum 1 percent magnesium oxide (MgO), maximum 0.4 percent sulfur trioxide (SO₃), maximum 1 percent loss on ignition, and maximum 3.5 percent insoluble residue.
- 1001.02 Uniformity of Color. Cement contained in single loads or in shipments of several loads to the same project shall not have visible differences in color.
- **1001.03 Mixing Brands and Types.** Different brands or different types of cement from the same manufacturing plant, or the same brand or type from different plants shall not be mixed or used alternately in the same item of construction unless approved by the Engineer.
- 1001.04 Storage. Cement shall be stored and protected against damage, such as dampness which may cause partial set or hardened lumps. Different brands or different types of cement from the same manufacturing plant, or the same brand or type from different plants shall be kept separate."

CONCRETE ADMIXTURES (BDE)

Effective: January 1, 2003 Revised: April 1, 2009

Replace the first paragraph of Article 1020.05(b) of the Standard Specifications to read:

"(b) Admixtures. The use of admixtures to increase the workability or to accelerate the hardening of the concrete will be permitted when approved by the Engineer. Admixture dosages shall result in the mixture meeting the specified plastic and hardened properties. The Department will maintain an Approved List of Corrosion Inhibitors. Corrosion inhibitor dosage rates shall be according to Article 1020.05(b)(12). The Department will also maintain an Approved List of Concrete Admixtures, and an admixture technical representative shall be consulted when determining an admixture dosage from this list. The dosage shall be within the range indicated on the approved list unless the influence by other admixtures, jobsite conditions (such as a very short haul time), or other circumstances warrant a dosage outside the range. The Engineer shall be notified when a dosage is proposed outside the range. To determine an admixture dosage, air temperature, concrete temperature, cement source and quantity, finely divided mineral sources(s) and quantity, influence of other admixtures, haul time, placement conditions, and other factors as appropriate shall be considered. Engineer may request the Contractor to have a batch of concrete mixed in the lab or field to verify the admixture dosage is correct. An admixture dosage or combination of admixture dosages shall not delay the initial set of concrete by more than one hour. When a retarding admixture is required or appropriate for a bridge deck or bridge deck overylay pour, the initial set time shall be delayed until the deflections due to the concrete dead load are no longer a concern for inducing cracks in the completed work. However, a retarding admixture shall not be used to further extend the pour time and justify the alteration of a bridge deck pour sequence.

When determining water in admixtures for water/cement ratio, the Contractor shall calculate 70 percent of the admixture dosage as water, except a value of 50 percent shall be used for a latex admixture used in bridge deck latex concrete overlays."

Revise Section 1021 of the Standard Specifications to read:

"SECTION 1021. CONCRETE ADMIXTURES

1021.01General. Admixtures shall be furnished in liquid form ready for use. The admixtures shall be delivered in the manufacturer's original containers, bulk tank trucks or such containers or tanks as are acceptable to the Engineer. Delivery shall be accompanied by a ticket which clearly identifies the manufacturer and trade name of the material. Containers shall be readily identifiable as to manufacturer and trade name of the material they contain.

Corrosion inhibitors will be maintained on the Department's Approved List of Corrosion Inhibitors. All other concrete admixture products will be maintained on the Department's

Approved List of Concrete Admixtures. For the admixture submittal, a report prepared by an independent laboratory accredited by the AASHTO Materials Reference Laboratory (AMRL) for Portland Cement Concrete shall be provided. The report shall show the results of physical tests conducted no more than five years prior to the time of submittal, according to applicable specifications. However, for corrosion inhibitors the ASTM G 109 test information specified in ASTM C 1582 is not required to be from and independent lab. All other information in ASTM C 1582 shall be from and independent lab.

Tests shall be conducted using materials and methods specified on a "test" concrete and a "reference" concrete, together with a certification that no changes have been made in the formulation of the material since the performance of the tests. Per the manufacturer's option, the cement content for all required tests shall either be according to applicable specifications or 5.65 cwt/cu yd (335 kg/cu m). Compressive strength test results for six months and one year will not be required.

Prior to the approval of an admixture, the Engineer reserves the right to request a sample for testing. The test and reference concrete mixtures tested by the Engineer will contain a cement content of 5.65 cwt/cu yd (335 kg/cu m). For freeze-thaw testing, the Department will perform the test according to AASHTO T 161, Procedure B. The flexural strength test will be performed according to AASHTO T 177. If the Engineer decides to test the admixture, the manufacturer shall submit AASHTO T 197 water content and set time test results on the standard cement used by the Department. The test and reference concrete mixture shall contain a cement content of 5.65 cwt/cu yd (335 kg/cu m). The manufacturer may select their lab or an independent lab to perform this testing. The laboratory is not required to be accredited by AASHTO.

The manufacturer shall include in the submittal the following admixture information: the manufacturing range for specific gravity, the midpoint and manufacturing range for residue by oven drying, and the manufacturing range for pH. The submittal shall also include an infrared spectrophotometer trace no more than five years old.

For air-entraining admixtures according to Article 1021.02, the specific gravity allowable manufacturing range shall be established by the manufacturer and the test method shall be according to ASTM C 494. For residue by oven drying and pH, the allowable manufacturing range and test methods shall be according to ASTM C 260.

For admixtures according to Articles 1021.03, 1021.04, 1021.05, 1021.06, and 1021.07, the pH allowable manufacturing range shall be established by the manufacturer and the test method shall be according to ASTM E 70. For specific gravity and residue by oven drying, the allowable manufacturing range and test methods shall be according to ASTM C 494.

When test results are more than seven years old, the manufacturer shall re-submit the infrared spectrophotometer trace and the report prepared by an independent laboratory accredited by AASHTO.

All admixtures, except chloride-based accelerators, shall contain a maximum of 0.3 percent chloride by weight (mass).

Random field samples may be taken by the Department to verify an admixture meets specification. A split sample will be provided to the manufacturer if requested. Admixtures that do not meet specification requirements or an allowable manufacturing range established by the manufacturer shall be replaced with new material.

1021.02Air-Entraining Admixtures. Air-entraining admixtures shall be according to AASHTO M 154.

1021.03Retarding and Water-Reducing Admixtures. The admixture shall be according to the following.

- (a) The retarding admixture shall be according to AASHTO M 194, Type B (retarding) or Type D (water-reducing and retarding).
- (b) The water-reducing admixture shall be according to AASHTO M 194, Type A.
- (c) The high range water-reducing admixture shall be according to AASHTO M 194, Type F (high range water-reducing) or Type G (high range water-reducing and retarding).
- **1021.04Accelerating Admixtures.** The admixture shall be according to AASHTO M 194, Type C (accelerating) or Type E (water reducing and accelerating).
- 1021.05Self-Consolidating Admixtures. The self-consolidating admixture system shall consist of either a high range water-reducing admixture only or a high range water-reducing admixture combined with a separate viscosity modifying admixture. The one or two component admixture system shall be capable of producing a concrete mixture that can flow around reinforcement and consolidate under its own weight without additional effort and without segregation.

The high range water-reducing admixture shall be according to AASHTO M 194, Type F.

The viscosity modifying admixture shall be according to ASTM C 494, Type S (specific performance).

- **1021.06Rheology-Controlling Admixture.** The rheology-controlling admixture shall be capable of producing a concrete mixture with a lower yield stress that will consolidate easier for slipform applications used by the Contractor. The rheology-controlling admixture shall be according to ASTM C 494, Type S (specific performance).
- 1021.07 Corrosion Inhibitor. The corrosion inhibitor shall be according to one of the following.

- (a) Calcium Nitrite. The corrosion inhibitor shall contain a minimum 30 percent calcium nitrite by weight (mass) of solution, and shall comply with the requirements of AASHTO M 194, Type C (accelerating).
- (b) Other Materials. The corrosion inhibitor shall be according to ASTM C 1582."

CONSTRUCTION AIR QUALITY - DIESEL VEHICLE EMISSIONS CONTROL (BDE)

Effective: April 1, 2009

<u>Diesel Vehicle Emissions Control</u>. The reduction of construction air emissions shall be accomplished by using cleaner burning diesel fuel. The term "equipment" refers to any and all diesel fuel powered devices rated at 50 hp and above, to be used on the project site in excess of seven calendar days over the course of the construction period on the project site (including any "rental" equipment).

All equipment on the jobsite, with engine ratings of 50 hp and above, shall be required to: use Ultra Low Sulfur Diesel fuel (ULSD) exclusively (15 ppm sulfur content or less).

In addition, all construction motor vehicles (both on-road and off-road, gasoline or diesel fuel powered) shall comply with all pertinent State and Federal regulations relative to exhaust emission controls and safety, including opacity. Frequently Asked Questions (FAQ's) regarding Illinois Environmental Protection Agency (IEPA) emissions testing for gasoline powered vehicles can be accessed at (http://www.epa.state.il.us/air/vim/faqs.html). Regulations regarding diesel powered vehicles over 16,000 lb (7260 kg), and the Diesel Emission Inspection Program (Title 92: Transportation Part 460, Diesel Emission Inspection Program, Subpart A: General) can be accessed at (http://www.ilga.gov/commission/jcar/admincode/092/09200460sections.html). Diesel powered vehicles less than 16,000 lb (7260 kg) are exempt from testing by the Department. All diesel powered equipment used on the project site shall be subject to reasonable, random spot checks for compliance with the required emissions controls and proper diesel fuel usage. The Secretary of State, Illinois State Police and other law enforcement officers will enforce Part 460. For additional information concerning Illinois diesel emission inspection requirements, please call the Illinois Department of Transportation, Diesel Emission Inspections Unit, at 217-557-6081.

Diesel powered equipment in non-compliance will not be allowed to be used on the project site, and is also subject to a notice of non-compliance as outlined below.

The Contractor shall submit copies of monthly summary reports and include certified copies of the ULSD diesel fuel delivery slips for diesel fuel delivered to the jobsite for the reporting time period, noting the quantity of diesel fuel used with each piece of diesel powered equipment. The addition or deletion of any diesel powered equipment shall be included in the summary and noted on the monthly report.

If any diesel powered equipment is found to be in non-compliance with any portion of this specification, the Engineer will issue the Contractor a notice of non-compliance and identify an appropriate period of time, as outlined below under environmental deficiency deduction, in which to bring the equipment into compliance or remove it from the project site.

Any costs associated with bringing any diesel powered equipment into compliance with these diesel vehicle emissions controls shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed. The

Contractor's compliance with this notice and any associated regulations shall also not be grounds for a claim.

<u>Environmental Deficiency Deduction</u>. When the Engineer is notified, or determines that an environmental control deficiency exists, he/she will notify the Contractor in writing, and direct the Contractor to correct the deficiency within a specified time period. The specified time-period, which begins upon Contractor notification, will be from 1/2 hour to 24 hours long, based on the urgency of the situation and the nature of the deficiency. The Engineer shall be the sole judge regarding the time period.

The deficiency will be based on lack of repair, maintenance and diesel vehicle emissions control.

If the Contractor fails to correct the deficiency within the specified time frame, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency continues to exist. The calendar day(s) will begin when the time period for correction is exceeded and end with the Engineer's written acceptance of the correction. The daily monetary deduction will be \$1,000.00 for each deficiency identified.

If a Contractor or subcontractor accumulates three environmental deficiency deductions in a contract period, the Contractor will be shutdown until the deficiency is corrected. Such a shutdown will not be grounds for any extension of contract time, waiver of penalties, or be grounds for any claim.

CONSTRUCTION AIR QUALITY - IDLING RESTRICTIONS (BDE)

Effective: April 1, 2009

Idling Restrictions. The Contractor shall establish truck-staging areas for all diesel powered vehicles that are waiting to load or unload material at the jobsite. Staging areas shall be located where the diesel emissions from the equipment will have a minimum impact on adjacent sensitive receptors. The Department will review the selection of staging areas, whether within or outside the existing highway right-of-way, to avoid locations near sensitive areas or populations to the extent possible. Sensitive receptors include, but are not limited to, hospitals, schools, residences, motels, hotels, daycare facilities, elderly housing and convalescent facilities. Diesel powered engines shall also be located as far away as possible from fresh air intakes, air conditioners, and windows. The Engineer will approve staging areas before implementation.

Diesel powered vehicle operators may not cause or allow the motor vehicle, when it is not in motion, to idle for more than a total of 10 minutes within any 60 minute period, except under any of the following circumstances:

- 1) The motor vehicle has a gross vehicle weight rating of less than 8000 lb (3630 kg).
- 2) The motor vehicle idles while forced to remain motionless because of on-highway traffic, an official traffic control device or signal, or at the direction of a law enforcement official.
- 3) The motor vehicle idles when operating defrosters, heaters, air conditioners, or other equipment solely to prevent a safety or health emergency.
- 4) A police, fire, ambulance, public safety, other emergency or law enforcement motor vehicle, or any motor vehicle used in an emergency capacity, idles while in an emergency or training mode and not for the convenience of the vehicle operator.
- 5) The primary propulsion engine idles for maintenance, servicing, repairing, or diagnostic purposes if idling is necessary for such activity.
- 6) A motor vehicle idles as part of a government inspection to verify that all equipment is in good working order, provided idling is required as part of the inspection.
- 7) When idling of the motor vehicle is required to operate auxiliary equipment to accomplish the intended use of the vehicle (such as loading, unloading, mixing, or processing cargo; controlling cargo temperature; construction operations, lumbering operations; oil or gas well servicing; or farming operations), provided that this exemption does not apply when the vehicle is idling solely for cabin comfort or to operate non-essential equipment such as air conditioning, heating, microwave ovens, or televisions.
- 8) When the motor vehicle idles due to mechanical difficulties over which the operator has no control.
- 9) The outdoor temperature is less than 32 °F (0 °C) or greater than 80 °F (26 °C).

When the outdoor temperature is greater than or equal to 32 °F (0 °C) or less than or equal to 80 °F (26 °C), a person who operates a motor vehicle operating on diesel fuel shall not cause or allow the motor vehicle to idle for a period greater than 30 minutes in any 60 minute period while waiting to weigh, load, or unload cargo or freight, unless the vehicle is in a line of vehicles that regularly and periodically moves forward.

The above requirements do not prohibit the operation of an auxiliary power unit or generator set as an alternative to idling the main engine of a motor vehicle operating on diesel fuel.

<u>Environmental Deficiency Deduction</u>. When the Engineer is notified, or determines that an environmental control deficiency exists based on non-compliance with the idling restrictions, he/she will notify the Contractor, and direct the Contractor to correct the deficiency.

If the Contractor fails to correct the deficiency a monetary deduction will be imposed. The monetary deduction will be \$1,000.00 for each deficiency identified.

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE)

Effective: September 1, 2000 Revised: November 1, 2008

<u>FEDERAL OBLIGATION</u>. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR part 26 and listed in the Illinois Unified Certification Program (IL UCP) DBE Directory or most recent addendum.

STATE OBLIGATION. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. When this Special Provision is used to satisfy state law requirements on 100 percent state-funded contracts, the federal government has no involvement in such contracts (not a federal-aid contract) and no responsibility to oversee the implementation of this Special Provision by the Department on those contracts. DBE participation on 100 percent state-funded contracts will not be credited toward fulfilling the Department's annual overall DBE goal required by the US Department of Transportation to comply with the federal DBE program requirements.

<u>CONTRACTOR ASSURANCE</u>. The Contractor makes the following assurance and agrees to include the assurance in each subcontract that the Contractor signs with a subcontractor:

The Contractor, subrecipient, or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of contracts funded in whole or in part with federal or state funds. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

OVERALL GOAL SET FOR THE DEPARTMENT. As a requirement of compliance with 49 CFR part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal applies to all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a good faith effort to achieve the overall goal. The dollar amount paid to all approved DBE companies performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

<u>CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR</u>. This contract includes a specific DBE utilization goal established by the Department. The goal has been included because the Department has determined that the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. This determination is

based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates that, in the absence of unlawful discrimination, and in an arena of fair and open competition, DBE companies can be expected to perform 3.00% of the work. This percentage is set as the DBE participation goal for this contract. Consequently, in addition to the other award criteria established for this contract, the Department will award this contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set forth in this Special Provision:

- (a) The bidder documents that firmly committed DBE participation has been obtained to meet the goal; or
- (b) The bidder documents that a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

DBE LOCATOR REFERENCES. Bidders may consult the IL UCP DBE Directory as a reference source for DBE-certified companies. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217)785-4611, or by visiting the Department's web site at www.dot.il.gov.

<u>BIDDING PROCEDURES</u>. Compliance with the bidding procedures of this Special Provision is required prior to the award of the contract and the failure of the as-read low bidder to comply will render the bid not responsive.

(a) In order to assure the timely award of the contract, the as-read low bidder shall submit a Disadvantaged Business Utilization Plan on Department form SBE 2026 within seven working days after the date of letting. To meet the seven day requirement, the bidder may send the Plan by certified mail or delivery service within the seven working day period. If a question arises concerning the mailing date of a Plan, the mailing date will be established by the U.S. Postal Service postmark on the original certified mail receipt from the U.S. Postal Service or the receipt issued by a delivery service. It is the responsibility of the bidder to ensure that the postmark or receipt date is affixed within the seven working days if the bidder intends to rely upon mailing or delivery to satisfy the submission day requirement. The Plan is to be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). It is the responsibility of the bidder to obtain confirmation of telefax delivery. The Department will not accept a Utilization Plan if it does not meet the seven day submittal requirement and the bid will be declared not responsive. In the event the bid is declared not responsive due to a failure to submit a Plan or failure to comply with the bidding procedures set forth herein, the Department may elect to cause the forfeiture of the

penal sum of the bidder's proposal guaranty, and may deny authorization to bid the project if re-advertised for bids. The Department reserves the right to invite any other bidder to submit a Utilization Plan at any time for award consideration or to extend the time for award.

- (b) The Utilization Plan shall indicate that the bidder either has obtained sufficient DBE participation commitments to meet the contract goal or has not obtained enough DBE participation commitments in spite of a good faith effort to meet the goal. The Utilization Plan shall further provide the name, telephone number, and telefax number of a responsible official of the bidder designated for purposes of notification of plan approval or disapproval under the procedures of this Special Provision.
- (c) The Utilization Plan shall include a DBE Participation Commitment Statement, Department form SBE 2025, for each DBE proposed for the performance of work to achieve the contract goal. The signatures on these forms must be original signatures. All elements of information indicated on the said form shall be provided, including but not limited to the following:
 - (1) The name and address of each DBE to be used;
 - (2) A description, including pay item numbers, of the commercially useful work to be done by each DBE;
 - (3) The price to be paid to each DBE for the identified work specifically stating the quantity, unit price, and total subcontract price for the work to be completed by the DBE. If partial pay items are to be performed by the DBE, indicate the portion of each item, a unit price where appropriate and the subcontract price amount;
 - (4) A commitment statement signed by the bidder and each DBE evidencing availability and intent to perform commercially useful work on the project; and
 - (5) If the bidder is a joint venture comprised of DBE companies and non-DBE companies, the plan must also include a clear identification of the portion of the work to be performed by the DBE partner(s).
- (d) The contract will not be awarded until the Utilization Plan submitted by the bidder is approved. The Utilization Plan will be approved by the Department if the Plan commits sufficient commercially useful DBE work performance to meet the contract goal. The Utilization Plan will not be approved by the Department if the Plan does not commit sufficient DBE performance to meet the contract goal unless the bidder documents that it made a good faith effort to meet the goal. The good faith procedures of Section VIII of this special provision apply. If the Utilization Plan is not approved because it is deficient in a technical matter, unless waived by the Department, the bidder will be notified and will be allowed no less than a five working day period in order to cure the deficiency.

CALCULATING DBE PARTICIPATION. The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Department is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Department and Contractor are governed by the provisions of 49 CFR part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR part 26.55, the provisions of which govern over the summary contained herein.

- (a) DBE as the Contractor: 100 percent goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE does not count toward the DBE goals.
- (b) DBE as a joint venture Contractor: 100 percent goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.
- (c) DBE as a subcontractor: 100 percent goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies, excluding the purchase of materials and supplies or the lease of equipment by the DBE subcontractor from the prime Contractor or its affiliates. Work that a DBE subcontractor in turn subcontracts to a non-DBE does not count toward the DBE goal.
- (d) DBE as a trucker: 100 percent goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed, and insured by the DBE must be used on the contact. Credit will be given for the full value of all such DBE trucks operated using DBE employed drivers. Goal credit will be limited to the value of the reasonable fee or commission received by the DBE if trucks are leased from a non-DBE company.
- (e) DBE as a material supplier:
 - (1) 60 percent goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.
 - (2) 100 percent goal credit for the cost of materials or supplies obtained from a DBE manufacturer.
 - (3) 100 percent credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a regular dealer or manufacturer.

GOOD FAITH EFFORT PROCEDURES. If the bidder cannot obtain sufficient DBE commitments to meet the contract goal, the bidder must document in the Utilization Plan the good faith efforts made in the attempt to meet the goal. This means that the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which could reasonably be expected to obtain sufficient DBE participation. The Department will consider the quality, quantity, and intensity of the kinds of efforts that the bidder has made. Mere *pro forma* efforts are not good faith efforts; rather, the bidder is expected to have taken those efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

- (a) The following is a list of types of action that the Department will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Department may be relevant in appropriate cases, and will be considered by the Department.
 - (1) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.
 - (2) Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime Contractor might otherwise prefer to perform these work items with its own forces.
 - (3) Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
 - (4) a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.
 - b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and

using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a bidder to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidders are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable.

- (5) Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.
- (6) Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or Contractor.
- (7) Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.
- (8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.
- (b) If the Department determines that the bidder has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Department will award the contract provided that it is otherwise eligible for award. If the Department determines that a good faith effort has not been made, the Department will notify the bidder of that preliminary determination by contacting the responsible company official designated in the Utilization Plan. The preliminary determination shall include a statement of reasons why good faith efforts have not been found, and may include additional good faith efforts that the bidder could take. The notification will designate a five working day period during which the bidder shall take additional efforts. The bidder is not limited by a statement of additional efforts, but may take other action beyond any stated additional efforts in order to obtain additional DBE commitments. The bidder shall submit an amended Utilization Plan if additional DBE commitments to meet the contract goal are secured. If additional DBE commitments sufficient to meet the contract goal are not secured, the bidder shall report the final good faith efforts made in the time allotted. All additional efforts taken by the bidder will be considered as part of the bidder's good faith efforts. If the bidder is not able to meet the goal after taking additional efforts, the Department will make a pre-final determination of the good faith efforts of the bidder and will notify the designated responsible company official of the reasons for an adverse determination.
- (c) The bidder may request administrative reconsideration of a pre-final determination adverse to the bidder within the five working days after the notification date of the

determination by delivering the request to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). Deposit of the request in the United States mail on or before the fifth business day shall not be deemed delivery. The pre-final determination shall become final if a request is not made and delivered. A request may provide additional written documentation and/or argument concerning the issue of whether an adequate good faith effort was made to meet the contract goal. In addition, the request shall be considered a consent by the bidder to extend the time for award. The request will be forwarded to the Department's Reconsideration Officer. The Reconsideration Officer will extend an opportunity to the bidder to meet in person in order to consider all issues of whether the bidder made a good faith effort to meet the goal. After the review by the Reconsideration Officer, the bidder will be sent a written decision within ten working days after receipt of the request for reconsideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Reconsideration Officer that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid not responsive.

CONTRACT COMPLIANCE. Compliance with this Special Provision is an essential part of the contract. The Department is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the Contractor did not succeed in obtaining enough DBE participation to achieve the advertised contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall become the amended contract goal.

- (a) No amendment to the Utilization Plan may be made without prior written approval from the Department's Bureau of Small Business Enterprises. All requests for amendment to the Utilization Plan shall be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764. Telephone number (217) 785-4611. Telefax number (217) 785-1524.
- (b) All work indicated for performance by an approved DBE shall be performed, managed, and supervised by the DBE executing the Participation Statement. The Contractor shall not terminate for convenience a DBE listed in the Utilization Plan and then perform the work of the terminated DBE with its own forces, those of an affiliate or those of another subcontractor, whether DBE or not, without first obtaining the written consent of the Bureau of Small Business Enterprises to amend the Utilization Plan. If a DBE listed in the Utilization Plan is terminated for reasons other than convenience, or fails to complete its work on the contract for any reason, the Contractor shall make good faith efforts to

find another DBE to substitute for the terminated DBE. The good faith efforts shall be directed at finding another DBE to perform at least the same amount of work under the contract as the DBE that was terminated, but only to the extent needed to meet the contract goal or the amended contract goal. The Contractor shall notify the Bureau of Small Business Enterprises of any termination for reasons other than convenience, and shall obtain approval for inclusion of the substitute DBE in the Utilization Plan. If good faith efforts following a termination of a DBE for cause are not successful, the Contractor shall contact the Bureau of Small Business Enterprises and provide a full accounting of the efforts undertaken to obtain substitute DBE participation. The Bureau of Small Business Enterprises will evaluate the good faith efforts in light of all circumstances surrounding the performance status of the contract, and determine whether the contract goal should be amended.

- (c) The Contractor shall maintain a record of payments for work performed to the DBE participants. The records shall be made available to the Department for inspection upon request. After the performance of the final item of work or delivery of material by a DBE and final payment therefor to the DBE by the Contractor, but not later than thirty calendar days after payment has been made by the Department to the Contractor for such work or material, the Contractor shall submit a DBE Payment Agreement on Department form SBE 2115 to the Regional Engineer. If full and final payment has not been made to the DBE, the DBE Payment Agreement shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or if the Contractor believes that the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Plan, the Department will deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages.
- (d) The Department reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.
- (e) Notwithstanding any other provision of the contract, including but not limited to Article 109.09 of the Standard Specifications, the Contractor may request administrative reconsideration of a decision to deduct the amount of the goal not achieved as liquidated damages. A request to reconsider shall be delivered to the Contract Compliance Section and shall be handled and considered in the same manner as set forth in paragraph (c) of "Good Faith Effort Procedures" of this Special Provision, except a final decision that a good faith effort was not made during contract performance to achieve the goal agreed to in the Utilization Plan shall be the final administrative decision of the Department.

DOWEL BARS (BDE)

Effective: April 1, 2007 Revised: January 1, 2008

Revise the fifth and sixth sentences of Article 1006.11(b) of the Standard Specifications to read:

"The bars shall be epoxy coated according to AASHTO M 284, except the thickness of the epoxy shall be 7 to 12 mils (0.18 to 0.30 mm) and patching of the ends will not be required. The epoxy coating applicator shall be certified according to the current Bureau of Materials and Physical Research Policy Memorandum, "Epoxy Coating Plant Certification Procedure". The Department will maintain an approved list."

EQUIPMENT RENTAL RATES (BDE)

Effective: August 2, 2007 Revised: January 2, 2008

Replace the second and third paragraphs of Article 105.07(b)(4)a. of the Standard Specifications with the following:

"Equipment idled which cannot be used on other work, and which is authorized to standby on the project site by the Engineer, will be paid for according to Article 109.04(b)(4)."

Replace Article 109.04(b)(4) of the Standard Specifications with the following:

- "(4) Equipment. Equipment used for extra work shall be authorized by the Engineer. The equipment shall be specifically described, be of suitable size and capacity for the work to be performed, and be in good operating condition. For such equipment, the Contractor will be paid as follows.
 - a. Contractor Owned Equipment. Contractor owned equipment will be paid for by the hour using the applicable FHWA hourly rate from the "Equipment Watch Rental Rate Blue Book" (Blue Book) in effect when the force account work begins. The FHWA hourly rate is calculated as follows.

FHWA hourly rate = (monthly rate/176) x (model year adj.) x (Illinois adj.) + EOC

Where: EOC = Estimated Operating Costs per hour (from the Blue Book)

The time allowed will be the actual time the equipment is operating on the extra work. For the time required to move the equipment to and from the site of the extra work and any authorized idle (standby) time, payment will be made at the following hourly rate: $0.5 \times (FHWA \text{ hourly rate} - EOC)$.

All time allowed shall fall within the working hours authorized for the extra work.

The rates above include the cost of fuel, oil, lubrication, supplies, small tools, necessary attachments, repairs, overhaul and maintenance of any kind, depreciation, storage, overhead, profits, insurance, and all incidentals. The rates do not include labor.

The Contractor shall submit to the Engineer sufficient information for each piece of equipment and its attachments to enable the Engineer to determine the proper equipment category. If a rate is not established in the Blue Book for a particular piece of equipment, the Engineer will establish a rate for that piece of equipment that is consistent with its cost and use in the industry.

b. Rented Equipment. Whenever it is necessary for the Contractor to rent equipment to perform extra work, the rental and transportation costs of the equipment plus five percent for overhead will be paid. In no case shall the rental rates exceed those of established distributors or equipment rental agencies.

All prices shall be agreed to in writing before the equipment is used."

HOT-MIX ASPHALT - FIELD VOIDS IN THE MINERAL AGGREGATE (BDE)

Effective: April 1, 2007 Revised: April 1, 2008

Add the following to the table in Article 1030.05(d)(2)a. of the Standard Specifications:

"Parameter	Frequency of Tests	Frequency of Tests	Test Method See Manual of Test
	High ESAL Mixture Low ESAL Mixture	All Other Mixtures	Procedures for Materials
VMA	Day's production ≥ 1200 tons:	N/A	Illinois-Modified AASHTO R 35
Note 5.	1 per half day of production		
	Day's production < 1200 tons:		
	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	-	

Note 5. The G_{sb} used in the voids in the mineral aggregate (VMA) calculation shall be the same average G_{sb} value listed in the mix design."

Add the following to the Control Limits table in Article 1030.05(d)(4) of the Standard Specifications:

"CONTROL LIMITS					
Parameter High ESAL Low ESAL Individual		High ESAL Low ESAL Moving Avg. of 4	All Other		
	Test		Test		
VMA .	-0.7 % ^{2/}	-0.5 % ^{2/}	N/A		

2/ Allowable limit below minimum design VMA requirement"

Add the following to the table in Article 1030.05(d)(5) of the Standard Specifications:

"CONTROL CHART REQUIREMENTS	High ESAL Low ESAL	All Other
	VMA"	

Revise the heading of Article 1030.05(d)(6)a.1. of the Standard Specifications to read:

"1. Voids, VMA, and Asphalt Binder Content."

Revise the first sentence of the first paragraph of Article 1030.05(d)(6)a.1.(a.) of the Standard Specifications to read:

"If the retest for voids, VMA, or asphalt binder content exceeds control limits, HMA production shall cease and immediate corrective action shall be instituted by the Contractor."

Revise the table in Article 1030.05(e) of the Standard Specifications to read:

"Test Parameter	Acceptable Limits of Precision	
% Passing: 1/		
1/2 in. (12.5 mm)	5.0 %	
No. 4 (4.75 mm)	5.0 %	
No. 8 (2.36 mm)	3.0 %	
No. 30 (600 μm)	2.0 %	
Total Dust Content No. 200 (75 μm) ^{1/}	2.2 %	
Asphalt Binder Content	0.3 %	
Maximum Specific Gravity of Mixture	0.026	
Bulk Specific Gravity	0.030	
VMA	1.4 %	
Density (% Compaction)	1.0 % (Correlated)	

^{1/} Based on washed ignition."

HOT-MIX ASPHALT - PLANT TEST FREQUENCY (BDE)

Effective: April 1, 2008

Revise the table in Article 1030.05(d)(2)a. of the Standard Specifications to read:

"Parameter	Frequency of Tests High ESAL Mixture Low ESAL Mixture	Frequency of Tests All Other Mixtures	Test Method See Manual of Test Procedures for Materials
Aggregate Gradation Hot bins for batch and continuous plants. Individual cold-feed or combined belt-feed for drier drum plants. % passing sieves: 1/2 in. (12.5 mm), No. 4 (4.75 mm), No. 8 (2.36 mm), No. 30 (600 μm) No. 200 (75 μm) Note 1.	1 dry gradation per day of production (either morning or afternoon sample). and 1 washed ignition oven test on the mix per day of production (conduct in the afternoon if dry gradation is conducted in the morning or vice versa). Note 3.	1 gradation per day of production. The first day of production shall be a washed ignition oven test on the mix. Thereafter, the testing shall alternate between dry gradation and washed ignition oven test on the mix. Note 4.	Illinois Procedure
Asphalt Binder Content by Ignition Oven Note 2.	1 per half day of production	1 per day	Illinois-Modified AASHTO T 308
Air Voids Bulk Specific Gravity of Gyratory Sample	Day's production ≥ 1200 tons: 1 per half day of production Day's production	1 per day	Illinois-Modified AASHTO T 312
·	< 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)		

	·		
"Parameter	Frequency of Tests	Frequency of Tests All Other Mixtures	Test Method See Manual of Test
	High ESAL Mixture Low ESAL Mixture	, and a mixtures	Procedures for Materials
Maximum Specific Gravity of Mixture	Day's production ≥ 1200 tons: 1 per half day of production	1 per day	Illinois-Modified AASHTO T 209"
	Day's production < 1200 tons:		
	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)		

HOT-MIX ASPHALT - TRANSPORTATION (BDE)

Effective: April 1, 2008

Revise Article 1030.08 of the Standard Specifications to read:

"1030.08 Transportation. Vehicles used in transporting HMA shall have clean and tight beds. The beds shall be sprayed with asphalt release agents from the Department's approved list. In lieu of a release agent, the Contractor may use a light spray of water with a light scatter of manufactured sand (FA 20 or FA 21) evenly distributed over the bed of the vehicle. After spraying, the bed of the vehicle shall be in a completely raised position and it shall remain in this position until all excess asphalt release agent or water has been drained.

When the air temperature is below 60 °F (15 °C), the bed, including the end, endgate, sides and bottom shall be insulated with fiberboard, plywood or other approved insulating material and shall have a thickness of not less than 3/4 in (20 mm). When the insulation is placed inside the bed, the insulation shall be covered with sheet steel approved by the Engineer. Each vehicle shall be equipped with a cover of canvas or other suitable material meeting the approval of the Engineer which shall be used if any one of the following conditions is present.

- (a) Ambient air temperature is below 60 °F (15 °C).
- (b) The weather is inclement.
- (c) The temperature of the HMA immediately behind the paver screed is below 250 $^{\circ}$ F (120 $^{\circ}$ C).

The cover shall extend down over the sides and ends of the bed for a distance of approximately 12 in. (300 mm) and shall be fastened securely. The covering shall be rolled back before the load is dumped into the finishing machine."

HOT-MIX ASPHALT MIXTURE IL-9.5L (BDE)

Effective: January 1, 2008

Revise the table entry for C Surface Mixture in Article 1004.03(a) of the Standard Specifications to read:

"Use	Mixture	Aggregates Allowed
HMA High ESAL Low ESAL	C Surface IL-12.5, IL-9.5, or IL-9.5L	Crushed Gravel Crushed Stone Crushed Sandstone Crushed Slag (ACBF)
		Crushed Steel Slag (except when used as leveling binder)"

Revise the second sentence of the first paragraph of Article 1004.03(b) of the Standard Specifications to read:

Revise the table in Article 1030.04(b)(2) of the Standard Specifications to read:

"VOLUMETRIC REQUIREMENTS					
		Low ESAL			
Mixture	Design	Design	VMA (Voids	VFA (Voids	
Composition	Compactive	Air Voids	in the	Filled with	
	Effort	Target %	Mineral	Asphalt	
			Aggregate),	Binder),	
			% min.	%	
IL-9.5L	$N_{DES} = 30$	4.0	15.0	65-78	
IL-19.0L	N _{DES} =30	4.0	13.0	N/A"	

[&]quot;For Class A (seal or cover coat), and other binder courses, the coarse aggregate shall be Class C quality or better."

LIQUIDATED DAMAGES (BDE)

Effective: April 1, 2009

Revise the table in Article 108.09 of the Standard Specifications to read:

"Schedule of Deductions for Each Day of Overrun in Contract Time					
tract Amount	Daily Charges				
To and Including	Calendar Work Day Day				
\$ 100,000 500,000 1,000,000 3,000,000 5,000,000 10,000,000	\$ 375 625 1,025 1,125 1,425 1,700	\$ 500 875 1,425 1,550 1,950 2,350 4,650"			
	To and Including \$ 100,000 500,000 1,000,000 3,000,000 5,000,000	Day of Overrun in Contract Time tract Amount Daily Contract Time To and Including Calendar Day \$ 100,000 \$ 375 500,000 625 1,000,000 1,025 3,000,000 1,125 5,000,000 1,425 10,000,000 1,700			

MONTHLY EMPLOYMENT REPORT (BDE)

Effective: April 1, 2009

In addition to any other reporting required by the contract, the Contractor shall provide to the Engineer an employment summary for all employees working on the contract from the contract execution date to the last full pay period each month for the duration of the contract. The report may include but is not limited to:

- a) A listing of the total number of employees.
- b) The employee job classification.
- c) The total hours worked and payroll for each employee.

The report shall be completed by the Contractor and each subcontractor. Employee hours worked from home office or other off-site office hours worked related directly to this contract shall be included. Engineering consulting firms performing construction layout and material testing for the Contractor shall also be included.

Hours worked for material suppliers, services provided by purchase orders, Department employees or consulting firms performing inspection or testing for the Department shall not be included in the report.

The report shall contain all hours worked under the contract from the start of the month to the last full pay period each month and shall be submitted no later than 10 business days after the end of each month.

The report shall be submitted electronically in a format determined by the Engineer. See attachment for potential reporting format.

Any costs associated with complying with this provision shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed.

Attachment

	PRIME AND SUBCONTRA IERICAN RECOVERY ANI				
First day of reporting period (mm/dd/yyyy): 2. L	ast day of reporting period (mm/dd/yyy	y): 3. Notice to Proceed Date	e (mm/dd/yyyy)		
4. NAME AND ADDRESS OF FIRM		5. FEDERAL-AID PROJECT NUMBER			
		6. State Project Number or ID			
7. CONTRACTING AGENCY		8. STATE (or Federal Lands Region)			
	Employme	ent Data			
Direct, On-Project Jobs		TOTAL EMPLOYEES	TOTAL HOURS	TOTAL PAYROLL	
CONSTRUCTION	NEW HIRES EXISTING EMPLOYEES				
ION-CONSTRUCTION	NEW HIRES EXISTING EMPLOYEES				
OTAL					
0. PREPARED BY: (Signature and Title)			•	DATE	
1. REVIEWED BY: (Signature and Title of State	e Highway Official)			DATE	

This form is issued in association with the American Recovery and Reinvestment Act of 2009

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM / EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: April 1, 2007 Revised: November 1, 2008

Revise Article 105.03(a) of the Standard Specifications to read:

"(a) National Pollutant Discharge Elimination System (NPDES) / Erosion and Sediment Control Deficiency Deduction. When the Engineer is notified or determines an erosion and/or sediment control deficiency(s) exists, or the Contractor's activities represents a violation of the Department's NPDES permits, the Engineer will notify and direct the Contractor to correct the deficiency within a specified time. The specified time, which begins upon notification to the Contractor, will be from 1/2 hour to 1 week based on the urgency of the situation and the nature of the work effort required. The Engineer will be the sole judge.

A deficiency may be any lack of repair, maintenance, or implementation of erosion and/or sediment control devices included in the contract, or any failure to comply with the conditions of the Department's NPDES permits. A deficiency may also be applied to situations where corrective action is not an option such as the failure to participate in a jobsite inspection of the project, failure to install required measures prior to initiating earth moving operations, disregard of concrete washout requirements, or other disregard of the NPDES permit.

If the Contractor fails to correct a deficiency within the specified time, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The calendar day(s) will begin with notification to the Contractor and end with the Engineer's acceptance of the correction. The daily monetary deduction will be either \$1000.00 or 0.05 percent of the awarded contract value, whichever is greater. For those deficiencies where corrective action was not an option, the monetary deduction will be immediate and will be valued at one calendar day."

PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000 Revised: January 1, 2006

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts and to set the time for such payments.

State law also addresses the timing of payments to be made to subcontractors and material suppliers. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, requires that when a Contractor receives any payment from the Department, the Contractor shall make corresponding, proportional payments to each subcontractor and material supplier performing work or supplying material within 15 calendar days after receipt of the Department payment. Section 7 of the Act further provides that interest in the amount of two percent per month, in addition to the payment due, shall be paid to any subcontractor or material supplier by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors and material suppliers throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the State Prompt Payment Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

When progress payments are made to the Contractor according to Article 109.07 of the Standard Specifications, the Contractor shall make a corresponding payment to each subcontractor and material supplier in proportion to the work satisfactorily completed by each subcontractor and for the material supplied to perform any work of the contract. The proportionate amount of partial payment due to each subcontractor and material supplier throughout the contracting chain shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors and material suppliers shall be paid by the Contractor within 15 calendar days after the receipt of payment from the Department. The Contractor shall not hold retainage from the subcontractors. These obligations shall also apply to any payments made by subcontractors and material suppliers to their subcontractors and material suppliers; and to all payments made to lower tier subcontractors and material suppliers throughout the contracting chain. Any payment or portion of a payment subject to this provision may only be withheld from the subcontractor or material supplier to whom it is due for reasonable cause.

This Special Provision does not create any rights in favor of any subcontractor or material supplier against the State or authorize any cause of action against the State on account of any payment, nonpayment, delayed payment, or interest claimed by application of the State Prompt Payment Act. The Department will not approve any delay or postponement of the 15 day requirement except for reasonable cause shown after notice and hearing pursuant to Section

7(b) of the State Prompt Payment Act. State law creates other and additional remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond according to the Public Construction Bond Act, 30 ILCS 550.

PAYROLLS AND PAYROLL RECORDS (BDE)

Effective: March 1, 2009

<u>FEDERAL AID CONTRACTS</u>. Revise the following section of Check Sheet #1 of the Recurring Special Provisions to read:

"STATEMENTS AND PAYROLLS

The payroll records shall include each worker's name, address, telephone number, social security number, classification, rate of pay, number of hours worked each day, starting and ending times of work each day, total hours worked each week, itemized deductions made, and actual wages paid.

The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work, except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number.). The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form."

STATE CONTRACTS. Revise Section IV of Check Sheet #5 of the Recurring Special Provisions to read:

"IV. COMPLIANCE WITH THE PREVAILING WAGE ACT

- 1. Prevailing Wages. All wages paid by the Contractor and each subcontractor shall be in compliance with The Prevailing Wage Act (820 ILCS 130), as amended, except where a prevailing wage violates a federal law, order, or ruling, the rate conforming to the federal law, order, or ruling shall govern. The Contractor shall be responsible to notify each subcontractor of the wage rates set forth in this contract and any revisions thereto. If the Department of Labor revises the wage rates, the Contractor will not be allowed additional compensation on account of said revisions.
- 2. Payroll Records. The Contractor and each subcontractor shall make and keep, for a period of three years from the date of completion of this contract, records of the wages paid to his/her workers. The payroll records shall include each worker's name, address, telephone number, social security number, classification, rate of pay, number of hours worked each day, starting and ending times of work each day, total hours worked each week, itemized deductions made, and actual wages paid. Upon two business days' notice, these records shall be available, at all reasonable hours at a location within the State, for inspection by the Department or the Department of Labor.

3. Submission of Payroll Records. The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work, except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form.

Each submittal shall be accompanied by a statement signed by the Contractor or subcontractor which avers that: (i) such records are true and accurate; (ii) the hourly rate paid to each worker is not less than the general prevailing rate of hourly wages required by the Act; and (iii) the Contractor or subcontractor is aware that filing a payroll record that he/she knows to be false is a Class B misdemeanor.

4. Employee Interviews. The Contractor and each subcontractor shall permit his/her employees to be interviewed on the job, during working hours, by compliance investigators of the Department or the Department of Labor."

PERSONAL PROTECTIVE EQUIPMENT (BDE)

Effective: November 1, 2008

Revise the first sentence of Article 701.12 of the Standard Specifications to read:

"All personnel on foot, excluding flaggers, within the highway right-of-way shall wear a fluorescent orange, fluorescent yellow/green, or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of ANSI/ISEA 107-2004 for Conspicuity Class 2 garments."

RECLAIMED ASPHALT PAVEMENT (RAP) (BDE)

Effective: January 1, 2007 Revised: April 1, 2009

In Article 1030.02(g), delete the last sentence of the first paragraph in (Note 2).

Revise Section 1031 of the Standard Specifications to read:

"SECTION 1031. RECLAIMED ASPHALT PAVEMENT

1031.01 Description. Reclaimed asphalt pavement (RAP) is reclaimed asphalt pavement resulting from cold milling or crushing of an existing dense graded hot-mix asphalt (HMA) pavement. The Contractor shall supply written documentation that the RAP originated from routes or airfields under federal, state, or local agency jurisdiction.

1031.02 Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. No additional RAP shall be added to the pile after the pile has been sealed. Stockpiles shall be sufficiently separated to prevent intermingling at the base. Stockpiles shall be identified by signs indicating the type as listed below (i.e. "Homogeneous Surface").

Prior to milling, the Contractor shall request the District to provide verification of the quality of the RAP to clarify appropriate stockpile.

- (a) Homogeneous. Homogeneous RAP stockpiles shall consist of RAP from Class I, Superpave (High ESAL), HMA (High ESAL), or equivalent mixtures and represent: 1) the same aggregate quality, but shall be at least C quality; 2) the same type of crushed aggregate (either crushed natural aggregate, ACBF slag, or steel slag); 3) similar gradation; and 4) similar asphalt binder content. If approved by the Engineer, combined single pass surface/binder millings may be considered "homogenous" with a quality rating dictated by the lowest coarse aggregate quality present in the mixture.
- (b) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I, Superpave (High ESAL), HMA (High ESAL), or equivalent mixtures. The coarse aggregate in this RAP shall be crushed aggregate and may represent more than one aggregate type and/or quality but shall be at least C quality. This RAP may have an inconsistent gradation and/or asphalt binder content prior to processing. All conglomerate RAP shall be processed prior to testing by crushing to where all RAP shall pass the 5/8 in. (16 mm) or smaller screen. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.
- (c) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP from Class I, Superpave (High or Low ESAL), HMA (High or Low ESAL), or equivalent mixtures. The coarse aggregate in this RAP may be crushed or round but shall be at least D quality. This RAP may have an inconsistent gradation and/or asphalt binder

content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.

(d) Non-Quality. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Non-Quality".

RAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, joint sealants, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.

1031.03 Testing. When used in HMA, the RAP shall be sampled and tested either during or after stockpiling.

For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons (450 metric tons) for the first 2000 tons (1800 metric tons) and one sample per 2000 tons (1800 metric tons) thereafter. A minimum of five tests shall be required for stockpiles less than 4000 tons (3600 metric tons).

For testing after stockpiling, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to obtain representative samples throughout the pile for testing.

Before extraction, each field sample shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

Evaluation of Test Results. All of the extraction results shall be compiled and averaged for asphalt binder content and gradation and, when applicable G_{mm} . Individual extraction test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	Homogeneous / Conglomerate	Conglomerate "D" Quality
1 in. (25 mm)		± 5 %
1/2 in. (12.5 mm)	±8%	± 15 %
No. 4 (4.75 mm)	±6%	± 13 %
No. 8 (2.36 mm)	± 5 %	
No. 16 (1.18 mm)		± 15 %
No. 30 (600 μm)	±5%	
No. 200 (75 μm)	± 2.0 %	± 4.0 %
Asphalt Binder	± 0.4 % 1/	± 0.5 %

1/ The tolerance for fractionated reclaimed asphalt pavement (FRAP) shall be \pm 0.3 %.

If more than 20 percent of the individual sieves are out of the gradation tolerances, or if more than 20 percent of the asphalt binder content test results fall outside the appropriate tolerances, the RAP shall not be used in HMA unless the RAP representing the failing tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

1031.04 Quality Designation of Aggregate in RAP. The quality of the RAP shall be set by the lowest quality of coarse aggregate in the RAP stockpile and are designated as follows.

- (a) RAP from Class I, Superpave (High ESAL), or HMA (High ESAL) surface mixtures are designated as containing Class B quality coarse aggregate.
- (b) RAP from Superpave (Low ESAL)/HMA (Low ESAL) IL-19.0L binder and IL-9.5L surface mixtures are designated as Class D quality coarse aggregate.
- (c) RAP from Class I, Superpave (High ESAL), or HMA (High ESAL) binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate.
- (d) RAP from bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate.

1031.05 Use of RAP in HMA. The use of RAP shall be a Contractor's option when constructing HMA in all contracts. The use of RAP in HMA shall be as follows.

- (a) Coarse Aggregate Size. The coarse aggregate in all RAP shall be equal to or less than the nominal maximum size requirement for the HMA mixture to be produced.
- (b) Steel Slag Stockpiles. RAP stockpiles containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in HMA (High ESAL and Low ESAL) surface mixtures only.
- (c) Use in HMA Surface Mixtures (High and Low ESAL). RAP stockpiles for use in HMA surface mixtures (High and Low ESAL) shall be homogeneous in which the coarse aggregate is Class B quality or better.
- (d) Use in HMA Binder Mixtures (High and Low ESAL), HMA Base Course, and HMA Base Course Widening. RAP stockpiles for use in HMA binder mixtures (High and Low ESAL), HMA base course, and HMA base course widening shall be homogeneous, or conglomerate, in which the coarse aggregate is Class C quality or better.

- (e) Use in Shoulders and Subbase. RAP stockpiles for use in HMA shoulders and stabilized subbase (HMA) shall be homogeneous, conglomerate, or conglomerate DQ.
- (f) When the Contractor chooses the RAP option, the percentage of RAP shall not exceed the amounts indicated in the table below for a given N Design.

Max RAP Percentage

HMA Mixtures 1/, 3/	Maximum % RAP					
Ndesign	Binder/Leveling Binder	Surface	Polymer Modified			
30	30	30	10			
50	25	15	10			
70	15 / 25 ^{2/}	10 / 15 ^{2/}	10			
90	10	10	10			
105	10	10	10			

- 1/ For HMA shoulder and stabilized subbase (HMA) N-30, the amount of RAP shall not exceed 50% of the mixture.
- 2/ Value of Max % RAP if homogeneous RAP stockpile of IL-9.5 RAP is utilized.
- 3/ When RAP exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28). If warm mix asphalt (WMA) technology is utilized, and production temperatures do not exceed 275°°F (135 °C) the grades shall be reduced as follows:

Overlays:

When WMA contains between 20 and 30 percent RAP the high temperature shall be reduced by one grade (i.e. 25 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-22). When WMA contains 30 percent or more RAP the high and low temperature grades shall each be reduced by one grade (i.e. 35 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28).

Full Depth:

When WMA contains between 20 and 30 percent RAP, the low temperature shall be reduced by one grade (i.e. 25 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG64-28). When the WMA contains 30 percent or more RAP the high and low temperature grades shall each be reduced by one grade (i.e. 35 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28).

(g) When the Contractor chooses the FRAP option, the percentage of FRAP shall not exceed the amounts indicated in the table below for a given N Design.

Max FRAP Percentage^{1/}

HMA Mixtures 2/, 3/	Maximum % FRAP					
Ndesign	Binder/Leveling Binder	Surface	Polymer Modified			
30	35	35	10			
50	30	25	10			
70	25	20	10			
90	20	15	10			
105	10	10	10			

- 1/ Minumum of two fractions for surface and binder applications.
- 2/ For HMA shoulder and stabilized subbase (HMA) N30, the amount of RAP shall not exceed 50 percent of the mixture.
- 3/ When FRAP exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent RAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28). If warm mix asphalt (WMA) technology is utilized, and production temperatures do not exceed 275°°F (135°C) the grades shall be reduced as follows:

Overlays:

When WMA contains between 20 and 30 percent FRAP the high temperature shall be reduced by one grade (i.e. 25 percent FRAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-22). When WMA contains 30 percent or more FRAP the high and low temperature grades shall each be reduced by one grade (i.e. 35 percent FRAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28).

Full Depth:

When WMA contains between 20 and 30 percent FRAP, the low temperature shall be reduced by one grade (i.e. 25 percent FRAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG64-28). When the WMA contains 30 percent or more FRAP the high and low temperature grades shall each be reduced by one grade (i.e. 35 percent FRAP would require a virgin asphalt binder grade of PG64-22 to be reduced to a PG58-28).

1031.06 HMA Mix Designs. At the Contractor's option, HMA mixtures may be constructed utilizing RAP material meeting the above detailed requirements.

RAP designs shall be submitted for volumetric verification. If additional RAP stockpiles are tested and found that no more than 20 percent of the results, as defined under "Testing" herein,

are outside of the control tolerances set for the original RAP stockpile and HMA mix design, and meets all of the requirements herein, the additional RAP stockpiles may be used in the original mix design at the percent previously verified.

1031.07 HMA Production. The coarse aggregate in all RAP used shall be equal to or less than the nominal maximum size requirement for the HMA mixture being produced.

To remove or reduce agglomerated material, a scalping screen, crushing unit, or comparable sizing device approved by the Engineer shall be used in the RAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If the RAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP and either switch to the virgin aggregate design or submit a new RAP design.

HMA plants utilizing RAP shall be capable of automatically recording and printing the following information.

- (a) Dryer Drum Plants.
 - (1) Date, month, year, and time to the nearest minute for each print.
 - (2) HMA mix number assigned by the Department.
 - (3) Accumulated weight of dry aggregate (combined or individual) in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
 - (4) Accumulated dry weight of RAP in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
 - (5) Accumulated mineral filler in revolutions, tons (metric tons), etc. to the nearest 0.1 unit.
 - (6) Accumulated asphalt binder in gallons (liters), tons (metric tons), etc. to the nearest 0.1 unit.
 - (7) Residual asphalt binder in the RAP material as a percent of the total mix to the nearest 0.1 percent.
 - (8) Aggregate and RAP moisture compensators in percent as set on the control panel. (Required when accumulated or individual aggregate and RAP are printed in wet condition.)
- (b) Batch Plants.

- (1) Date, month, year, and time to the nearest minute for each print.
- (2) HMA mix number assigned by the Department.
- (3) Individual virgin aggregate hot bin batch weights to the nearest pound (kilogram).
- (4) Mineral filler weight to the nearest pound (kilogram).
- (5) RAP weight to the nearest pound (kilogram).
- (6) Virgin asphalt binder weight to the nearest pound (kilogram).
- (7) Residual asphalt binder in the RAP material as a percent of the total mix to the nearest 0.1 percent.

The printouts shall be maintained in a file at the plant for a minimum of one year or as directed by the Engineer and shall be made available upon request. The printing system will be inspected by the Engineer prior to production and verified at the beginning of each construction season thereafter.

1031.08 RAP in Aggregate Surface Course and Aggregate Shoulders. The use of RAP in aggregate surface course and aggregate shoulders shall be as follows.

- (a) Stockpiles and Testing. RAP stockpiles may be any of those listed in Article 1031.02, except "Other". The testing requirements of Article 1031.03 shall not apply.
- (b) Gradation. One hundred percent of the RAP material shall pass the 1 1/2 in. (37.5 mm) sieve. The RAP material shall be reasonably well graded from coarse to fine. RAP material that is gap-graded or single sized will not be accepted."

REFLECTIVE SHEETING ON CHANNELIZING DEVICES (BDE)

Effective: April 1, 2007 Revised: November 1, 2008

Revise the seventh paragraph of Article 1106.02 of the Standard Specifications to read:

"At the time of manufacturing, the retroreflective prismatic sheeting used on channelizing devices shall meet or exceed the initial minimum coefficient of retroreflection as specified in the following table. Measurements shall be conducted according to ASTM E 810, without averaging. Sheeting used on cones, drums and flexible delineators shall be reboundable as tested according to ASTM D 4956. Prestriped sheeting for rigid substrates on barricades shall be white and orange. The sheeting shall be uniform in color and devoid of streaks throughout the length of each roll. The color shall conform to the latest appropriate standard color tolerance chart issued by the U.S. Department of Transportation, Federal Highway Administration, and to the daytime and nighttime color requirements of ASTM D 4956.

Initial Minimum Coefficient of Retroreflection candelas/foot candle/sq ft (candelas/lux/sq m) of material									
Observation Entrance Angle Fluorescent									
	(deg.)	White	Orange	Orange					
0.2	-4	365	160	150					
0.2	+30	175	80	70					
0.5	-4	245	100	95					
0.5	+30	100	50	40"					

Revise the first sentence of the first paragraph of Article 1106.02(c) of the Standard Specifications to read:

"Barricades and vertical panels shall have alternating white and orange stripes sloping downward at 45 degrees toward the side on which traffic will pass."

Revise the third sentence of the first paragraph of Article 1106.02(d) of the Standard Specifications to read:

"The bottom panels shall be 8 x 24 in. (200 x 600 mm) with alternating white and orange stripes sloping downward at 45 degrees toward the side on which traffic will pass."

RETROREFLECTIVE SHEETING, NONREFLECTIVE SHEETING, AND TRANSLUCENT OVERLAY FILM FOR HIGHWAY SIGNS (BDE)

Effective: April 1, 2007

<u>General</u>. This special provision covers retroreflective sheeting and translucent overlay films intended for application on new or refurbished aluminum. The sheeting serves as the reflectorized background for sign messages and as cutout legends and symbols applied to the reflectorized background. Messages may be applied in opaque black or transparent colors.

This special provision also covers nonreflective sheeting for application on new or refurbished aluminum, and as material for cutout legends and symbols applied to the reflectorized background.

All material furnished under this specification shall have been manufactured within 18 months of the delivery date. All material shall be supplied by the same manufacturer.

<u>Retroreflective Sheeting Properties</u>. Retroreflective sheeting shall consist of a flexible, colored, prismatic, or glass lens elements adhered to a synthetic resin, encapsulated by a flexible, transparent plastic having a smooth outer surface and shall meet the following requirements.

Only suppliers whose products have been tested and approved in the Department's periodic Sheeting Study will be eligible to supply material. All individual batches and or lots of material shall be tested and approved by the Department. The Department reserves the right to sample and test delivered materials according to Federal Specification LS-300.

- (a) Adhesive. The sheeting shall have a Class 1, pre-coated, pressure sensitive adhesive according to ASTM D 4956. The adhesive shall have a protective liner that is easily removed when tested according to ASTM D 4956. The adhesive shall be capable of being applied to new or refurbished aluminum and reflectorized backgrounds without additional adhesive.
- (b) Color. The sheeting shall be uniform in color and devoid of streaks throughout the length of each roll. The color shall conform to the latest appropriate standard color tolerance chart issued by the U.S. Department of Transportation, Federal Highway Administration and to the daytime and nighttime color requirements of ASTM D 4956. Sheeting used for side by side overlay applications shall have a Hunter Lab Delta E of less than 3.
- (c) Coefficient of Retroreflection. When tested according to ASTM E 810, without averaging, the sheeting shall have a minimum coefficient of retroreflection as shown in the following tables. The brightness of the sheeting when totally wet shall be a minimum of 90 percent of the values shown when tested according to the standard rainfall test specified in Section 7.10.1 of AASHTO M 268-84.

Type A Sheeting
Minimum Coefficient of Retroreflection
candelas/foot candle/sq ft (candelas/lux/sq m) of material



Type A Observation Entrance Angle (deg.) Angle (deg.) White Yellow Orange Red Green Blue Brown 0.2 -4 250 170 100 45 45 20 12 0.2 +30 150 100 25 60 25 12 8.5 0.5 -4 95 65 30 15 15 8 5 0.5 +30 75 50 25 10 5 10 3.5

Type AA Sheeting Minimum Coefficient of Retroreflection candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AA (0 and 90 degree rotation)

	· · · · · · · · · · · · · · · · · · ·	JPOTUL	o and so	ucyice i	otation		
Observation	Entrance						
Angle (deg.)	Angle (deg.)	White	Yellow	Red	Green	Blue	FO
0.2	-4	800	660	215	80	43	200
0.2	+30	400	340	100	35	20	120
0.5	-4	200	160	45	20	9.8	80
0.5	+30	100	85	26	10	5.0	50

Type AA (45 degree rotation)

Observation Angle (deg.)	Entrance	V-II-	
Angle (deg.)	Angle (deg.)	Yellow	_ FO
0.2	-4	550	165
0.2	+30	130	45
0.5	-4	145	70
0.5	+30	70	40

Type AP Sheeting Minimum Coefficient of Retroreflection candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AP

Observation	Entrance		1,7,90,7					
Angle (deg.)	Angle (deg.)	White	Yellow	Red	Green	Blue	Brown	FO
0.2	4	550	425	100	75	50	30	275
0.2	+30	200	150	40	35	25	15	90
0.5	-4	300	250	60	35	25	20	150
0.5	+30	100	70	20	20	10	5	50

Type AZ Sheeting Minimum Coefficient of Retroreflection candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AZ (0 degree rotation)

- 1		ri	1 900 /	<u>ız (o degi</u>	ee rotatio	JII)			
	Observation	Entrance					78845		
	Angle (deg.)	Angle (deg.)	White	Yellow	Red	Green	Blue	FYG	FY
	0.2	-4	430	350	110	45	20	325	240
ļ	0.2	+30	235	140	60	24	11	200	150
	0.5	-4	250	200	60	25	10	235	165
ļ	0.5	+30	170	135	40	19	7	105	75
	1.0	4	70	45	10	10	4	70	30
Į	1.0	+30	30	20	7	5	2.5	45	15

Type AZ (90 degree rotation)

Observation	Entrance			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			<u> </u>	
Angle (deg.)	Angle (deg.)	White	Yellow	Red	Green	Blue	FYG	FY
0.2	-4	320	250	100	45	20	300	220
0.2	+30	235	140	40	24	11	200	150
0.5	-4	240	200	60	25	10	235	165
0.5	+30	100	85	20	10	7	80	75
1.0	-4	30	30	7	5	4	65	20
1.0	+30	15	15	5	2	2	30	10

- (d) Gloss. The sheeting surface shall exhibit a minimum 85 degree gloss-meter rating of 50 when tested according to ASTM D 523.
- (e) Durability. When processed and applied, the sheeting shall be weather resistant.

Accelerated weathering testing will be performed for 1000 hours (300 hours for orange/FO) according to ASTM G 151. The testing cycle will consist of 8 hours of light at 140 °F (60 °C), followed by 4 hours of condensation at 104 °F (40 °C). Following accelerated weathering, the sheeting shall exhibit a minimum of 80 percent of its initial minimum coefficient of retroreflection as listed in the previous tables.

Outdoor weathering will entail an annual evaluation of material placed in an outdoor rack with a 45 degree angle and a southern sun exposure. The sheeting will be evaluated for five years. Following weathering, the test specimens will be cleaned by immersing them in a five percent hydrochloric acid solution for 45 seconds, then rinsed with water and blotted dry with a soft clean cloth. Following cleaning, the applied sheeting shall show no appreciable discoloration, cracking, streaking, crazing, blistering, or dimensional change. The sheeting shall exhibit a Hunter Lab Delta E of 5 or less when compared to the original.

- (f) Shrinkage. When tested according to ASTM D 4956, the sheeting shall not shrink in any dimension more than 1/32 in. (0.8 mm) in ten minutes and not more than 1/8 in. (3 mm) in 24 hours.
- (g) Workability. The sheeting shall show no cracking, scaling, pitting, blistering, edge lifting, inter-film splitting, curling, or discoloration when processed and applied using mutually acceptable processing and application procedures.
- (h) Splices. A single roll of sheeting shall contain a maximum of four splices per 50 yd (45 m) length. The sheeting shall be overlapped a minimum of 3/16 in. (5 mm) at each splice.
- (i) Adhesive Bond. The sheeting shall form a durable bond to smooth, corrosion and weather-resistant surfaces and adhere securely when tested according to ASTM D 4956.
- (j) Positionability. Sheeting, with ASTM D 4956 Class 3 adhesive, used for manufacturing cutout legends and borders shall provide sufficient positionability during the fabrication process to permit removal and reapplication without damage to either the legend or sign background and shall have a plastic liner suitable for use on bed cutting machines. Thereafter, all other adhesive and bond requirements contained in the specification shall apply.

Positionablility shall be verified by cutting 4 in. (100 mm) letters E, I, K, M, S, W, and Y out of the positionable material. The letters shall then be applied to a sheeted aluminum blank using a single pass of a two pound roller. The letters shall sit for five minutes and then a putty knife shall be used to lift a corner. The thumb and fore finger shall be used to slowly pull the lifted corner to lift letters away from the sheeted aluminum. The letters shall not tear or distort when removed.

- (k) Thickness. The thickness of the sheeting without the protective liner shall be less than or equal to 0.015 in. (0.4 mm), or 0.025 in. (0.6 mm) for prismatic material.
- (I) Processing. The sheeting shall permit cutting and color processing according to the sheeting manufacturer's specifications at temperatures of 60 to 100 °F (15 to 38 °C) and within a relative humidity range of 20 to 80 percent. The sheeting shall be heat resistant and permit forced curing without staining the applied or unapplied sheeting at temperatures recommended by the manufacturer. The sheeting shall be solvent resistant and capable of being cleaned with VM&P naptha, mineral spirits, and turpentine.

Transparent color and opaque black inks shall be single component and low odor. The inks shall dry within eight hours and not require clear coating. After color processing on white sheeting, the sheeting shall show no appreciable discoloration, cracking, streaking, crazing, blistering, or dimensional change when tested for durability (e). The ink on the weathered, prepared panel shall exhibit a Hunter Lab Delta E of 5 or less when compared to the original.

Transparent color electronic cutting films shall be acrylic. After application to white sheeting, the films shall show no appreciable discoloration, cracking, streaking, crazing, blistering, or dimensional change when tested for durability (e). The films on the weathered, prepared panel shall exhibit a Hunter Lab Delta E of 5 or less when compared to the original.

Transparent colors screened, or transparent acrylic electronic cutting films, on white sheeting, shall have a minimum initial coefficient of retroreflection values of 50 percent for yellow and red, and a minimum 70 percent for green, blue, and brown of the 0.2 degree observation angle/-4.0 degree entrance angle values as listed in the previous tables for the color being applied. After durability testing, the colors shall retain a minimum 80 percent of the initial coefficient of retroreflection.

- (m) Identification. The sheeting shall have a distinctive overall pattern in the sheeting unique to the manufacturer. If material orientation is required for optimum retroreflectivity, permanent orientation marks shall be incorporated into the face of the sheeting. Neither the overall pattern nor the orientation marks shall interfere with the reflectivity of the sheeting.
- (n) Packaging. Both ends of each box shall be clearly labeled with the sheeting type, color, adhesive type, manufacturer's lot number, date of manufacture, and supplier's name. Material Safety Data Sheets and technical bulletins for all materials shall be furnished to the Department with each shipment.

<u>Nonreflective Sheeting Properties</u>. Nonreflective sheeting shall consist of a flexible, pigmented cast vinyl film having a smooth, flat outer surface and shall meet the following requirements.

The Department reserves the right to sample and test delivered materials according to Federal Specification LS-300.

- (a) Adhesive. The sheeting shall have a Class 1, pre-coated, pressure sensitive adhesive according to ASTM D 4956. The adhesive shall have a protective liner that is easily removed when tested according to ASTM D 4956. The adhesive shall be capable of being applied to new or refurbished aluminum and reflectorized backgrounds without additional adhesive.
- (b) Color. The sheeting shall be uniform in color and devoid of streaks throughout the length of each roll.
- (c) Gloss. The sheeting shall exhibit a minimum 85 degree gloss-meter rating of 40 when tested according to ASTM D 523.
- (d) Durability. Applied sheeting that has been vertically exposed to the elements for seven years shall show no appreciable discoloration, cracking, crazing, blistering, delamination, or loss of adhesion. A slight amount of chalking is permitted but the sheeting shall not support fungus growth.



- (e) Testing. Test panels shall be prepared by applying the sheeting to 6 1/2 x 6 1/2 in. (165 x 165 mm) pieces of aluminum according to the manufacturer's specifications. The edges of the panel shall be trimmed evenly and aged 48 hours at 70 to 90 °F (21 to 32 °C). Shrinkage and immersion testing shall be as follows.
 - (1) Shrinkage. The sheeting shall not shrink more then 1/64 in. (0.4 mm) from any panel edge when subjected to a temperature of 150 °F (66 °C) for 48 hours and shall be sufficiently heat resistant to retain adhesion after one week at 150 °F (66 °C).
 - (2) Immersion Testing. The sheeting shall show no appreciable decrease in adhesion, color, or general appearance when examined one hour after being immersed to a depth of 2 or 3 in. (50 or 75 mm) in the following solutions at 70 to 90 °F (21 to 32 °C) for specified times.

Solution	Immersion Time (hours)
Reference Fuel (M I L-F-8799A) (15 parts xylol and 85 parts mineral spirits by weight)	1
Distilled Water	24
SAE No. 20 Motor Oil	24
Antifreeze (1/2 ethylene glycol, 1/2 distilled water)	24

- (f) Adhesive Bond: The sheeting shall form a durable bond to smooth, corrosion and weather-resistant surfaces and adhere securely when tested according to ASTM D 4956.
- (g) Thickness. The thickness of the sheeting without the protective liner shall be a maximum of 0.005 in. (0.13 mm).
- (h) Cutting. Material used on bed cutting machines shall have a smooth plastic liner.
- (i) Identification. The sheeting shall have a distinctive overall pattern in the sheeting unique to the manufacturer. If material orientation is required for optimum retroreflectivity, permanent orientation marks shall be incorporated into the face of the sheeting. Neither the overall pattern nor the orientation marks shall interfere with the reflectivity of the sheeting.
- (j) Packaging. Both ends of each box shall be clearly labeled with the sheeting type, color, adhesive type, manufacturer's lot number, date of manufacture, and supplier's name. Material Safety Data Sheets and technical bulletins for all materials shall be furnished to the Department with each shipment.

SEEDING (BDE)

Effective: July 1, 2004 Revised: January 1, 2009

Revise the following seeding mixtures shown in Table 1 of Article 250.07 of the Standard Specifications to read:

	"Ta	ble 1 - SEEDING MIXTURES	
	Class – Type	Seeds	lb/acre (kg/hectare)
2	Roadside Mixture 7/	Tall Fescue (Inferno, Tarheel II, Quest, Blade Runner, or Falcon IV)	100 (110)
		Perennial Ryegrass	50 (55)
		Creeping Red Fescue	40 (50)
2A	Colt Talanat	Red Top	10 (10)
ZA.	Salt Tolerant Roadside Mixture 7/	Tall Fescue (Inferno, Tarheel II, Quest, Blade Runner, or Falcon IV)	60 (70)
	•	Perennial Ryegrass	20 (20)
		Red Fescue (Audubon, Sea Link, or Epic)	30 (20)
		Hard Fescue (Rescue 911, Spartan II, or Reliant IV)	30 (20)
		Fults Salt Grass 1/	60 (70)"

Revise Note 7 of Table 1 – Seeding Mixtures of Article 250.07 of the Standard Specifications to read:

"7/ In Districts 1 through 6, the planting times shall be April 1 to June 15 and August 1 to November 1. In Districts 7 through 9, the planting times shall be March 1 to June 1 and August 1 to November 15. Seeding may be performed outside these dates provided the Contractor guarantees a minimum of 75 percent uniform growth over the entire seeded area(s) after a period of establishment. Inspection dates for the period of establishment will be as follows: Seeding conducted in Districts 1 through 6 between June 16 and July 31 will be inspected after April 15 and seeding conducted between November 2 and March 31 will be inspected after September 15. Seeding conducted in Districts 7 through 9 between June 2 and July 31 will be inspected after April 15 and seeding conducted between November 16 and February 28 will be inspected after September 15. The guarantee shall be submitted to the Engineer in writing prior to performing the work. After the period of establishment, areas not exhibiting 75 percent uniform growth shall be interseeded or reseeded, as determined by the Engineer, at no additional cost to the Department."

Revise Table II of Article 1081.04(c)(6) of the Standard Specifications to read:

		TAI	BLE II			
	Hard		Pure		Secondary *	
	Seed	Purity	Live	Weed	Noxious Weeds	
	%	%	Seed %	%	No. per oz (kg)	
Variety of Seeds	Max.	Min.	Min.	Max.	Max. Permitted	Notes
Alfalfa	20	. 92	89	0.50	6 (211)	1/
Clover, Alsike	15	92	87	0.30	6 (211)	2/
Red Fescue, Audubon	0	97	82	0.10	3 (105)	
Red Fescue, Creeping	-	97	82	1.00	6 (211)	-
Red Fescue, Epic	-	98	83	0.05	1 (35)	
Red Fescue, Sea Link	-	98	83	0.10	3 (105)	-
Tall Fescue, Blade Runner	-	98	83	0.10	2 (70)	-
Tall Fescue, Falcon IV	-	98	83	0.05	1 (35)	_
Tall Fescue, Inferno	0	98	83	0.10	2 (70)	-
Tall Fescue, Tarheel II	-	. 97	82	1.00	6 (211)	-
Tall Fescue, Quest	0	98	83	0.10	2 (70)	
Fults Salt Grass	0	98	85	0.10	2 (70)	_
Kentucky Bluegrass	-	97	80	0.30	7 (247)	4/
Oats	-	92	88	0.50	2 (70)	3/
Redtop		90	78	1.80	5 (175)	3/
Ryegrass, Perennial, Annual	-	97	85	0.30	5 (175)	3/
Rye, Grain, Winter	-	92	83	0.50	2 (70)	3/
Hard Fescue, Reliant IV	-	98	83	0.05	1 (35)	-
lard Fescue, Rescue 911	0	97	82	0.10	3 (105)	_
lard Fescue, Spartan II	-	98	83	0.10	3 (105)	-
Fimothy	-	92	84	0.50	5 (175)	3/
Wheat, hard Red Winter		92	89	0.50	2 (70)	3/"

Revise the first sentence of the first paragraph of Article 1081.04(c)(7) of the Standard Specifications to read:

"The seed quantities indicated per acre (hectare) for Prairie Grass Seed in Classes 3, 3A, 4, 4A, 6, and 6A in Article 250.07 shall be the amounts of pure, live seed per acre (hectare) for each species listed."



SIGN PANELS AND SIGN PANEL OVERLAYS (BDE)

Effective: November 1, 2008

<u>Description</u>. This work shall consist of furnishing, fabricating, and installing sign panels and/or sign panel overlays. Work shall be according to Sections 720 and 721 of the Standard Specifications, except as modified herein.

Materials. Type AP and AZ sheeting shall meet the requirements of the special provision, "Retroreflective Sheeting, Nonreflective Sheeting, and Translucent Overlay Film for Highway Signs". Type ZZ sheeting shall meet the requirements of the special provision, "Type ZZ Retroreflective Sheeting, Nonreflective Sheeting, and Translucent Overlay Film for Highway Signs".

The sheeting for the background, legend, border, shields, and symbols shall be provided by the same manufacturer.

CONSTRUCTION REQUIREMENTS

<u>Fabrication</u>. Signs shall be fabricated according to the current Bureau of Operations Policy Memorandum, "Fabrication of Highway Signs", the MUTCD, the FHWA Standard Highway Signs manual, the Illinois standard highway signs, and as shown on the plans.

Signs shall be fabricated such that the material for the background, legend, border, shields, and symbols is applied in the preferred orientation for the maximum retroreflectivity per the manufacturer's recommendation. The nesting of legend, border, shields, or symbols will not be permitted.



SILT FILTER FENCE (BDE)

Effective: January 1, 2008

For silt filter fence fabric only, revise Article 1080.02 of the Standard Specifications to read:

"1080.02 Geotextile Fabric. The fabric for silt filter fence shall be a woven fabric meeting the requirements of AASHTO M 288 for unsupported silt fence with less than 50 percent geotextile elongation."

Replace the last sentence of Article 1081.15(b) of the Standard Specifications with the following:

"Silt filter fence stakes shall be a minimum of 4 ft (1.2 m) long and made of either wood or metal. Wood stakes shall be 2 in. x 2 in. (50 mm x 50 mm). Metal stakes shall be a standard T or U shape having a minimum weight (mass) of 1.32 lb/ft (600 g/300 mm)."

SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: April 2, 2005

To account for the preparatory work and operations necessary for the movement of subcontractor personnel, equipment, supplies, and incidentals to the project site and for all other work or operations that must be performed or costs incurred when beginning work approved for subcontracting in accordance with Article 108.01 of the Standard Specifications, the Contractor shall make a mobilization payment to each subcontractor.

This mobilization payment shall be made at least 14 days prior to the subcontractor starting work. The amount paid shall be equal to 3 percent of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

This provision shall be incorporated directly or by reference into each subcontract approved by the Department.

TEMPORARY EROSION CONTROL (BDE)

Effective: November 1, 2002 Revised: January 1, 2008

Revise the third paragraph of Article 280.03 of the Standard Specifications to read:

"Erosion control systems shall be installed prior to beginning any activities which will potentially create erodible conditions. Erosion control systems for areas outside the limits of construction such as storage sites, plant sites, waste sites, haul roads, and Contractor furnished borrow sites shall be installed prior to beginning soil disturbing activities at each area. These offsite systems shall be designed by the Contractor and be subject to the approval of the Engineer."

Add the following paragraph after the third paragraph of Article 280.03 of the Standard Specifications:

"The temporary erosion and sediment control systems shown on the plans represent the minimum systems anticipated for the project. Conditions created by the Contractor's operations, or for the Contractor's convenience, which are not covered by the plans, shall be protected as directed by the Engineer at no additional cost to the Department. Revisions or modifications of the erosion and sediment control systems shall have the Engineer's written approval."

Add the following paragraph after the ninth paragraph of Article 280.07 of the Standard Specifications:

"Temporary or permanent erosion control systems required for areas outside the limits of construction will not be measured for payment."

Delete the tenth (last) paragraph of Article 280.08 of the Standard Specifications.

THERMOPLASTIC PAVEMENT MARKINGS (BDE)

Effective: January 1, 2007

Revise Article 1095.01(a)(2) of the Standard Specifications to read:

"(2) Pigment. The pigment used for the white thermoplastic compound shall be a high-grade pure (minimum 93 percent) titanium dioxide (TiO₂). The white pigment content shall be a minimum of ten percent by weight and shall be uniformly distributed throughout the thermoplastic compound.

The pigments used for the yellow thermoplastic compound shall not contain any hazardous materials listed in the Environmental Protection Agency Code of Federal Regulations (CFR) 40, Section 261.24, Table 1. The combined total of RCRA listed heavy metals shall not exceed 100 ppm when tested by X-ray fluorescence spectroscopy. The pigments shall also be heat resistant, UV stable and color-fast yellows, golds, and oranges, which shall produce a compound which shall match Federal Standard 595 Color No. 33538. The pigment shall be uniformly distributed throughout the thermoplastic compound."

Revise Article 1095.01(b)(1)e. of the Standard Specifications to read:

"e. Daylight Reflectance and Color. The thermoplastic compound after heating for four hours ± five minutes at 425 ± 3 °F (218.3 ± 2 °C) and cooled at 77 °F (25 °C) shall meet the following requirements for daylight reflectance and color, when tested, using a color spectrophotometer with 45 degree circumferential/zero degree geometry, illuminant C, and two degree observer angle. The color instrument shall measure the visible spectrum from 380 to 720 nm with a wavelength measurement interval and spectral bandpass of 10 nm.

White: Daylight Reflectance75 percent min. *Yellow: Daylight Reflectance45 percent min.

*Shall meet the coordinates of the following color tolerance chart.

x 0.490 0.475 0.485 0.530 y 0.470 0.438 0.425 0.456"

Revise Article 1095.01(b)(1)k. of the Standard Specifications to read:

"k. Accelerated Weathering. After heating the thermoplastic for four hours ± five minutes at 425 ± 3 °F (218.3 ± 2 °C) the thermoplastic shall be applied to a steel wool abraded aluminum alloy panel (Federal Test Std. No. 141, Method 2013) at a film thickness of 30 mils (0.70 mm) and allowed to cool for 24 hours at room temperature. The coated panel shall be subjected to accelerated weathering

using the light and water exposure apparatus (fluorescent UV - condensation type) for 75 hours according to ASTM G 53 (equipped with UVB-313 lamps).

The cycle shall consist of four hours UV exposure at 122 °F (50 °C) followed by four hours of condensation at 104 °F (40 °C). UVB 313 bulbs shall be used. At the end of the exposure period, the panel shall not exceed 10 Hunter Lab Delta E units from the original material."

WORKING DAYS (BDE)

Effective: January 1, 2002

The Contractor shall complete the work within 30 working days.

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

		Page
I.	General	ī
II.	Nondiscrimination	1
III.	Nonsegregated Facilities	3
IV.	Payment of Predetermined Minimum Wage	3
٧.	Statements and Payrolls	5
VI.	Record of Materials, Supplies, and Labor	6
VII.	Subletting or Assigning the Contract	6
VIII.	Safety: Accident Prevention	7
IX.	False Statements Concerning Highway Projects	7
Χ.	Implementation of Clean Air Act and Federal	
	Water Pollution Control Act	7
XI.	Certification Regarding Debarment, Suspension,	
	Ineligibility, and Voluntary Exclusion	8
XII.	Certification Regarding Use of Contract Funds for	
	Lobbying	9

ATTACHMENTS

A. Employment Preference for Appalachian Contracts (included in Appalachian contracts only)

I. GENERAL

- 1. These contract provisions shall apply to all word performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.
- 2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.
- 3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.
- **4.** A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

Section I, paragraph 2; Section IV, paragraphs 1, 2, 3, 4 and 7; Section V, paragraphs 1 and 2a through 2g.

- **5.** Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6 and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.
- **6.** Selection of Labor: During the performance of this contract, the contractor shall not:
- a. Discriminate against labor from any other State, possession, or

territory of the United States (except for employment preference for

Appalachian contracts, when applicable, as specified in Attachment

A), or

b. Employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole.

supervised release, or probation.

II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

- 1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60 (and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:
- ${\bf a.}\;$ The contractor will work with the State highway agency (SHA) and

the Federal Government in carrying out EEO obligations and in their

review of his/her activities under the contract.

 $\mbox{\bf b.}\,$ The contractor will accept as his operating policy the following

statement: "It is the policy of this Company to assure that applicants

are employed, and that employees are treated during employment,

without regard to their race, religion, sex, color, national origin, age or

disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or

termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship,

preapprenticeship,

and/or on-the-job-training."

- 2. EEO Officer: The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for an must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.
- **3. Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:
 - a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
 - **b.** All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
 - **c.** All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.
 - d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees,

applicants for employment and potential employees.

- **e.** The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.
- **4. Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.
 - a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employees referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish which such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.
 - b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)
 - c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.
- **5. Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
 - a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site
 - **b.** The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
 - c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
 - d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6. Training and Promotion:

- a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.
- b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be

- in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.
- **c.** The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
- **d.** The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.
- 7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:
 - **a.** The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.
 - **b.** The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
 - **c.** The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.
 - **d.** In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.
- 8. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.
 - **a.** The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.
- b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from

and to utilize DBE subcontractors or subcontractors with meaningful $% \left(1\right) =\left(1\right) \left(1\right)$

minority group and female representation among their employees.

Contractors shall obtain lists of DBE construction firms from SHA

personnel.

- **c.** The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.
- **9. Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.
- **a.** The records kept by the contractor shall document the following:
- (1) The number of minority and non-minority group members and women employed in each work classification on the project;
 - **(2)** The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women:
- (3) The progress and efforts being made in locating, hiring, training,
 - ung, qualifying, and upgrading minority and female employees; and
- (4) The progress and efforts being made in securing the services of

DBE subcontractors or subcontractors with meaningful minority and

female representation among their employees.

b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

- a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.
- **b**. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).
- **c.** The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of \$10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located

on roadways classified as local roads or rural minor collectors, which are exempt.)

1. General:

- a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.
- **b.** Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.
- **c.** All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. Classification:

- **a.** The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.
- **b.** The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:
- (1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;
- (2) the additional classification is utilized in the area by the construction industry;
- (3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and
- **(4)** with respect to helpers, when such a classification prevails in the area in which the work is performed.
- **c.** If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the

contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

- d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the question, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advised the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
- e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. Payment of Fringe Benefits:

 $\mbox{\bf a.}\mbox{ }$ Whenever the minimum wage rate prescribed in the contract for a

class of laborers or mechanics includes a fringe benefit which is not

- expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.
- b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any cost reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:

a. Apprentices:

- (1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.
- (2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any

employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be

the full amount of fringe benefits listed on the wage determination

for the applicable classification. If the Administrator for the Wage

and Hour Division determines that a different practice prevails for

the applicable apprentice classification, fringes shall be paid in accordance with that determination.

- (4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.
- **b**. Trainees:

paid

- (1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.
- (2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.
- (3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which cases such trainees shall receive the same fringe benefits as apprentices.
 - (4) In the event the Employment and Training Administration

withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV. 2. Any worker listed on a payroll at a helper wage rate, who is not a helper under a approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. Apprentices and Trainees (Programs of the U.S. DOT):

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. Withholding:

The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainee's and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. Overtime Requirements:

No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. Violation:

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of \$10 for each calendar day on which such employee was required or

permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. Withholding for Unpaid Wages and Liquidated Damages:

The SHA shall; upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. Compliance with Copeland Regulations (29 CFR 3):

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. Payrolls and Payroll Records:

- a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.
- b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.
- c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely

all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for submitting payroll copies of all subcontractors.

- d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the Contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
- (1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;
- (2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;
- (3) that each laborer or mechanic has been paid not less that the applicable wage rate and fringe benefits or cash equivalent for
- the classification of worked performed, as specified in the applicable
- wage determination incorporated into the contract.
- **e**. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.
- f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U/S. C. 1001 and 31 U.S.C. 231.
- g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

- 1. On all federal-aid contracts on the national highway system, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than \$1,000,000 (23 CFR 635) the contractor shall:
 - a. Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.
 - b. Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.
 - c. Furnish, upon the completion of the contract, to the SHA resident engineer on /Form FHWA-47 together with the data

- required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.
- **2**. At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

VII. SUBLETTING OR ASSIGNING THE CONTRACT

- 1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractors' own organization (23 CFR 635).
 - a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.
 - b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.
- 2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
- 3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.
- 4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY: ACCIDENT PREVENTION

- 1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
- 2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in

surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S. C. 333).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more than \$10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$100,000 or more).

By submission of this bid or the execution of this contract, or

subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

- 1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.
- 2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.
- **3.** That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, EPA indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.
- **4.** That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. Instructions for Certification - Primary Covered Transactions:

a. By signing and submitting this proposal, the prospective

(Applicable to all Federal-aid contracts - 49 CFR 29)

primary participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an

explanation shall disqualify such a person from participation in

this transaction.

- **c.** The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default
- d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is

submitted if any time the prospective primary participant learns that

its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible,""lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal

is submitted for assistance in obtaining a copy of those regulations.

- f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification in all lower tier covered transactions

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may

and in all solicitations for lower tier covered transactions.

decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded from Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

.

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Primary Covered Transactions

- 1. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:
 - **a.** Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
 - b. Have not within a 3-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
 - c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and
 - d. Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- 2. Where the prospective primary participant is unable to certify

to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * * *

2. Instructions for Certification - Lower Tier Covered Transactions:

(Applicable to all subcontracts, purchase orders and other lower tier transactions of \$25,000 or more - 49 CFR 29)

- **a.** By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
- **b.** The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
- **c.** The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
- d. The terms "covered transaction," "debarred,"
 "suspended," "ineligible," "primary covered transaction,"
 "participant," "person," "principal," "proposal," and
 "voluntarily excluded," as used in this clause, have the
 meanings set out in the Definitions and Coverage sections of
 rules implementing Executive Order 12549. You may contact
 the person to which this proposal is submitted for assistance in
 obtaining a copy of those regulations.
- **e.** The prospective lower tie participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
- f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
- **g.** A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.
- h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealing.
- i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

Certification Regarding Debarment, Suspension, Ineligibility And Voluntary Exclusion-Lower Tier Covered Transactions:

- 1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.
- 2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * * *

XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 - 49 CFR 20)

- 1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
 - a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
 - b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
- 2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
- **3.** The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

MINIMUM WAGES FOR FEDERAL AND FEDERALLY ASSISTED CONSTRUCTION CONTRACTS

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision shall be the minimum paid by contractors and subcontractors to laborers and mechanics.

NOTICE

The most current **General Wage Determination Decisions** (wage rates) are available on the IDOT web site. They are located on the Letting and Bidding page at http://www.dot.state.il.us/desenv/delett.html.

In addition, ten (10) days prior to the letting, the applicable Federal wage rates will be e-mailed to subscribers. It is recommended that all contractors subscribe to the Federal Wage Rates List or the Contractor's Packet through IDOT's subscription service.

PLEASE NOTE: if you have already subscribed to the Contractor's Packet you will automatically receive the Federal Wage Rates.

The instructions for subscribing are at http://www.dot.state.il.us/desenv/subsc.html.

If you have any questions concerning the wage rates, please contact IDOT's Chief Contract Official at 217-782-7806.