








LEGEND

-  IMPACT ATTENUATOR
-  TEMPORARY CONCRETE BARRIER
-  BARRELS OR BARRICADES WITH STEADY BURNING LIGHT
-  TEMPORARY BRIDGE TRAFFIC SIGNALS
-  TYPE III BARRICADE



SAND MODULE IMPACT ATTENUATOR LAYOUT
(IF OPTION USED)

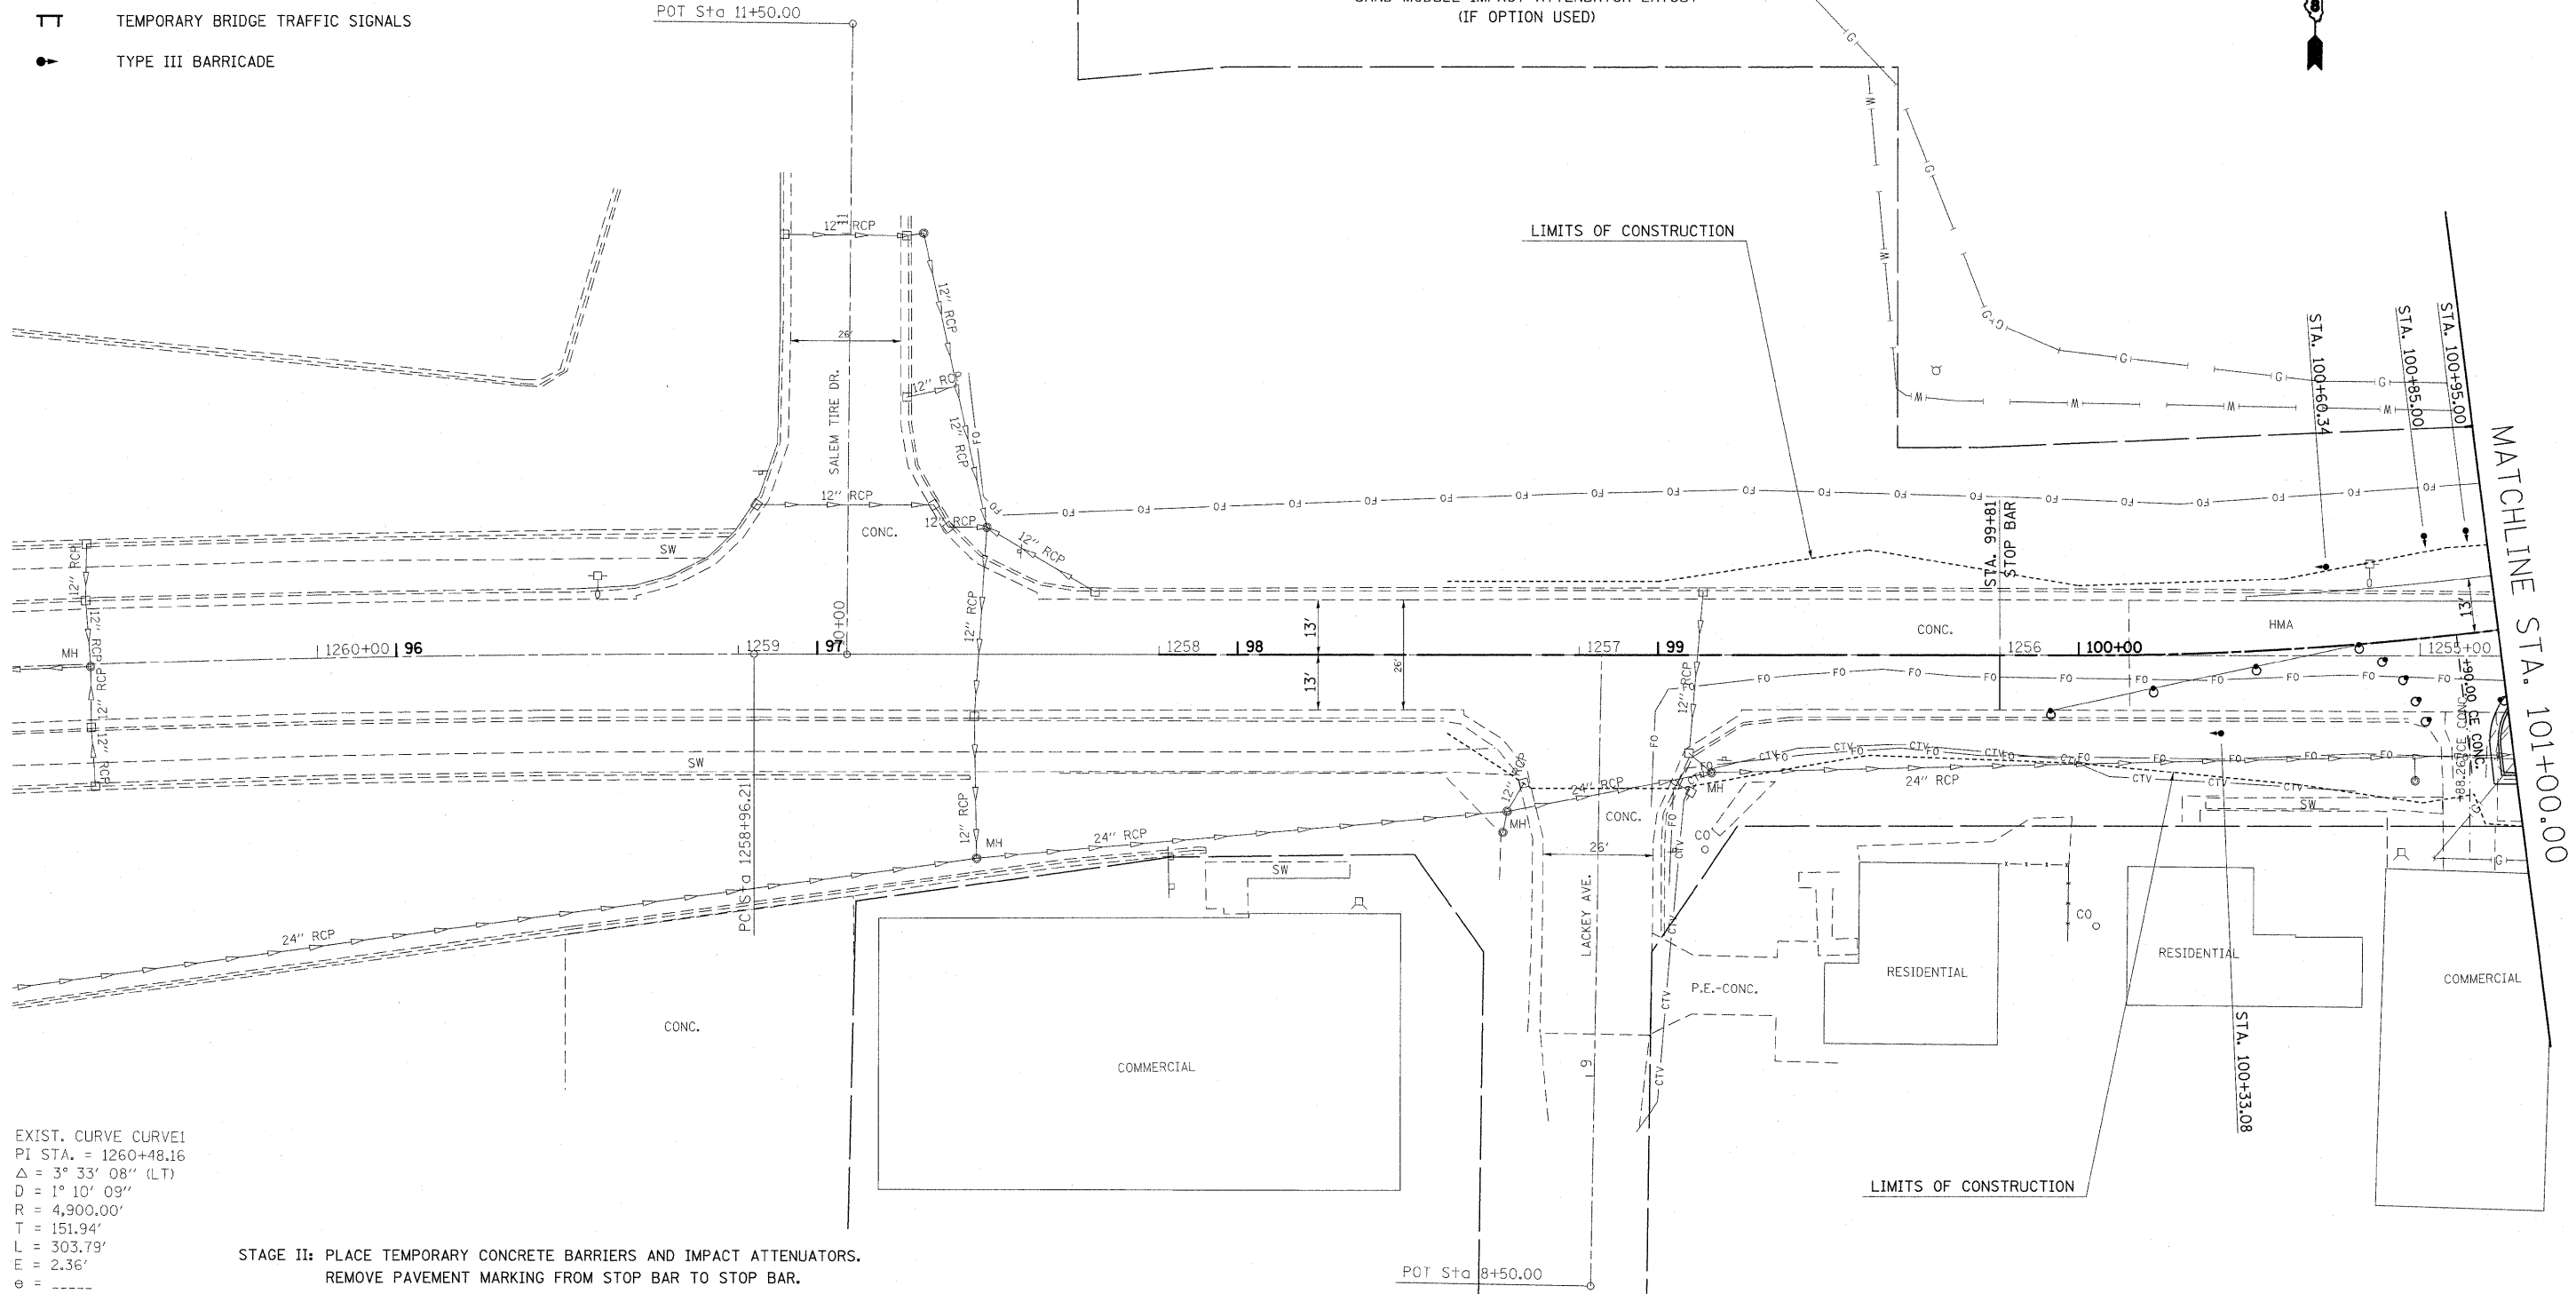

EXIST. CURVE CURVE1
 PI STA. = 1260+48.16
 $\Delta = 3^\circ 33' 08''$ (LT)
 $D = 1^\circ 10' 09''$
 $R = 4,900.00'$
 $T = 151.94'$
 $L = 303.79'$
 $E = 2.36'$
 $e =$
 $T.R. =$
 $S.E. RUN =$
 P.C. STA. = 1258+96.21
 P.T. STA. = 1262+00.00

- STAGE II: PLACE TEMPORARY CONCRETE BARRIERS AND IMPACT ATTENUATORS. REMOVE PAVEMENT MARKING FROM STOP BAR TO STOP BAR. REDUCE TRAFFIC TO ONE LANE AND MOVE OVER ONTO THE NEW PAVEMENT, UTILIZING TRAFFIC SIGNALS.**
- UTILIZE STANDARD 701321 (SPECIAL) TO:
 - REMOVE EXISTING PAVEMENT AND BRIDGE.
 - CONSTRUCT BOX CULVERT.
 - CONSTRUCT LANE ADJACENT TO THE PROPOSED LANE.
 - CONSTRUCT DITCHES TO CREEK ON THE SOUTH SIDE OF ROADWAY.

- STAGE III: COMPLETE REMAINDER OF WORK WITH TWO LANES OPEN TO TRAFFIC.**
- UTILIZE STANDARD 701326 TO COMPLETE:
 - CURB AND GUTTER
 - ENTRANCES
 - RIPRAP
 - STORM SEWER

NOTE: ALTERATIONS TO STANDARD 701321 ARE SHOWN ON STAGE CONSTRUCTION SHEETS IN PLANS.



FILE NAME = c:\p\work\p\WIDOT\HARBAUGH\rd\dms52271\tdg03007e.dgn	USER NAME = harbaughhd	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE II CONSTRUCTION SHEET	F.A.P. RTE. 327	SECTION 15B-1	COUNTY MARION	TOTAL SHEETS 58	SHEET NO. 18
PLOT SCALE = 20,0000' / IN.	PLOT DATE = 1/11/2010	DRAWN -	REVISI -	SCALE: 20 SHEET NO. 4 OF 6 SHEETS STA. --- TO STA. 101+00		CONTRACT NO. 76A59				
		CHECKED -	REVISI -	ILLINOIS FED. AID PROJECT						
		DATE -	REVISI -							