


EXISTING AND PROPOSED TYPICAL SECTION
KOSTNER AVE TO HOMAN AVE

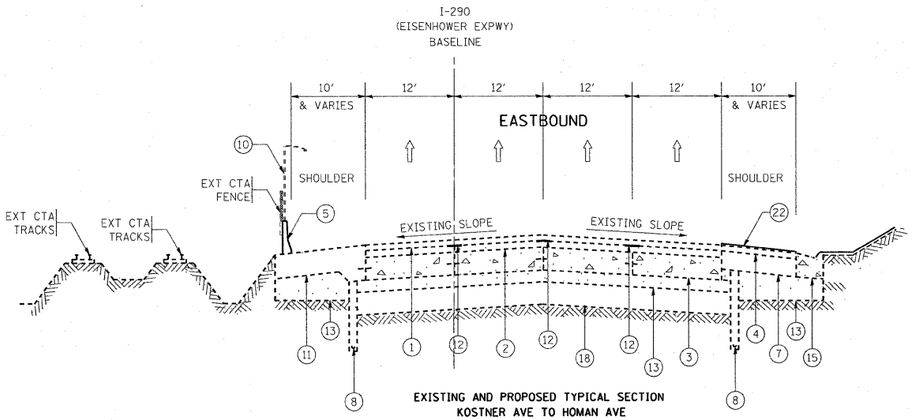


EXISTING AND PROPOSED TYPICAL SECTION
PEORIA AVE TO I-94

NOTE:

**INSIDE HMA SHOULDER (EASTBOUND):**

FROM STA. 104+70 TO STA. 122+21
FROM STA. 125+08 TO STA. 143+50
FROM STA. 169+30 TO STA. 273+96
FROM STA. 596+13 TO STA. 619+64

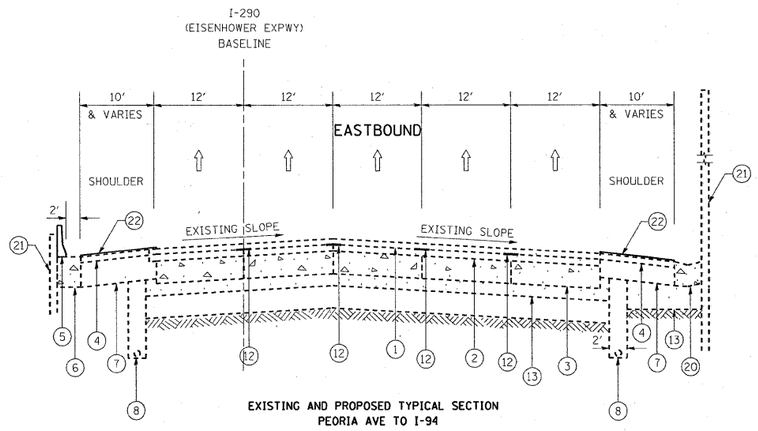**INSIDE PCC SHOULDER (EASTBOUND):**

FROM STA. 23+66 TO STA. 104+70
FROM STA. 122+21 TO STA. 125+08
FROM STA. 143+50 TO STA. 169+30
FROM STA. 276+96 TO STA. 596+13

**OUTSIDE HMA SHOULDER (EASTBOUND):**

FROM STA. 23+66 TO STA. 111+05
FROM STA. 120+55 TO STA. 121+85
FROM STA. 137+84 TO STA. 164+37
FROM STA. 281+66 TO STA. 619+64

**OUTSIDE PCC SHOULDER (EASTBOUND):**

FROM STA. 111+05 TO STA. 120+55
FROM STA. 121+85 TO STA. 137+84
FROM STA. 164+37 TO STA. 281+66

## LEGEND

(1) EXISTING POLY HMA SURFACE CSE, MIX "F", N105, 1-3/4"
(2) EXISTING POLY HMA BINDER COURSE, IL-19, N105, 2-1/4"
(3) EXISTING P.C.C. PAVEMENT, 10"
(4) EXISTING HMA SURFACE COURSE, MIX "D", N70, 1-3/4"
(5) EXISTING SINGLE FACE CONCRETE BARRIER WALL
(6) EXISTING P.C.C. BASE COURSE
(7) EXISTING HMA SHOULDER
(8) EXISTING PIPE UNDERDRAIN
(9) EXISTING CONCRETE MEDIAN BARRIER
(10) EXISTING LIGHT POLE
(11) EXISTING P.C.C. SHOULDER
(12) EXISTING STRIP REFLECTIVE CRACK CONTROL TREATMENT
(13) EXISTING STABILIZED SUB-BASE, 4"
(14) EXISTING COMB. CONC. CURB AND GUTTER TYPE B-6.24
(15) EXISTING COMB. CONC. CURB AND GUTTER TYPE M-6.24
(16) EXISTING COMB. CONC. CURB AND GUTTER TYPE B-6.12
(17) EXISTING 4" PVC DUCT (ELECTRICAL)
(18) EXISTING POROUS GRANULAR EMBANKMENT (PGE)
(19) EXISTING STEEL PLATE BEAM GUARD RAIL
(20) EXISTING TYPE A GUTTER
(21) EXISTING RETAINING WALL
(22) PROPOSED ASPHALTIC EMULSION SLURRY SEAL

| | | | |
|---|---|---|---|
| FILE NAME = c:\pw_work\PWIDOT\GALBANNB\dms88502\shtrdwy.dgn | USER NAME = galbannb | DESIGNED - | REVISED - |
| | | DRAWN - | REVISED - |
| | PLOT SCALE = 50.0000 ' / IN. | CHECKED - | REVISED - |
| | PLOT DATE = 12/18/2008 | DATE - | REVISED - |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**I-290 (EISENHOWER EXPRWY) 25TH AVE. - I-90/94**
**EXISTING AND PROPOSED TYPICAL SECTIONS**

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

| F.A.I RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 290 | 2008-055 I | COOK | 33 | 5 |
| | | CONTRACT NO. 60F10 | | |
| FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT | | |