

RESURFACED PCC PAVEMENT

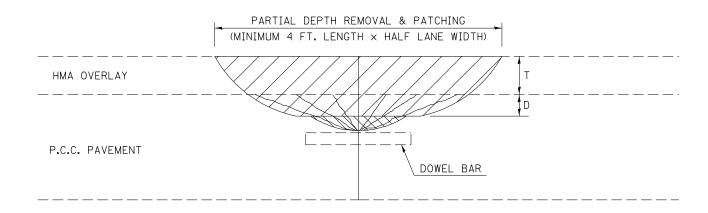

RESURFACED PCC PAVEMENT STA. 507+00 T0 STA. 524+85 *

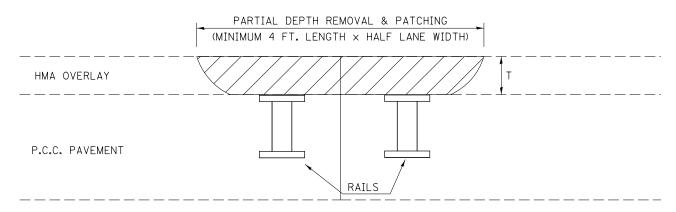

+ PARTIAL DEPTH REMOVAL (of the thickness specified)

MILL MACHINE AND/OR WHEEL SAW REMOVAL AIR EQUIPMENT OR MECHANICAL SWEEPER REMOVAL OF LOOSE AND/OR UNSOUND CONCRETE

GENERAL NOTES

ALL VOLUME OF PARTIAL DEPTH REMOVAL SHALL BE REPLACED WITH HOT-MIX ASPHALT (HMA) AND PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR PARTIAL DEPTH PATCHING.

T = THICKNESS OF HMA OVERLAY(S). SEE EXISTING TYPICAL CROSS SECTION.

GENERAL NOTE 406H SHALL INCLUDE MIXTURE REQUIREMENTS FOR PARTIAL DEPTH PATCHING.

HMA REPLACEMENT IN RESURFACED PCC PAVEMENT LOCATIONS SHALL BE ACCORDING TO SECTION 406 OF THE STANDARD SPECIFICATIONS.

D = DEPTH OF PARTIAL DEPTH REMOVAL INTO EXISTING PCC PAVEMENT.

(3" (75 mm) ± OR TO SOUND CONCRETE)

TRANSVERSE CONTRACTION JOINT SHOWN - OTHER LOCATIONS SIMILAR.

* AT STATIONS INDICATED ON THE PLANS, THERE WILL BE NO REMOVAL OF THE PC CONCRETE.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = cearlockjd	DESIGNED	REVISED - 11∠Ω6			F.A.P.	SECTION	COUNTY	TOTAL	SHEE	♬
c:\pw_work\pwidot\cearlockjd\d0388189\D5	70843-sht-details.dgn	DRAWN	REVISED - 10∠10	STATE OF ILLINOIS	PCC PARTIAL DEPTH HOT-MIX ASPHALT PATCHING	741	(7,Z)RS-3	PIATT	63	61	٦
	PLOT SCALE = 800.0000 ' / in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION			,	CONTRAC	T NO.	7084	3
	PLOT DATE = 4/10/2014	DATE	REVISED		SCALE: SHEET NO OF SHEETS STA TO STA	FED. ROAD DI	ST. NO ILLINOIS FED. AII				٦