


CA008

REVISIONS		
NUMBER	BY	DATE




SPRINGFIELD AIRPORT AUTHORITY  
 ABRAHAM LINCOLN CAPITAL AIRPORT  
 SPRINGFIELD, ILLINOIS

RECONSTRUCT AND EXPAND THE SOUTHEAST RAMP  
 CONSTRUCTION ACTIVITY PLAN 2

© Copyright CMT, Inc.  
**CMT**  
 CRAWFORD, MURPHY & TILLY, INC.  
 CONSULTING ENGINEERS  
 License No. 894-000618


DESIGN BY:	RLV/KLB
DRAWN BY:	CMT
CHECKED BY:	RLV
APPROVED BY:	RLV
DATE:	JANUARY 27, 2009
JOB No:	08035-08
IL PROJ. NO.	SPI-3885
AIP PROJ. NO.	3-17-0096-XX
SHEET	05 OF 40 SHEETS



- LEGEND**
- WORK LIMITS
  - WORK AREA
  - CONSTRUCTION SET BACK LINE
  - BARRICADES IDOT TYPE 1 WITH RED LIGHTS AND 20"x 20" ORANGE FLAGS AT 20' SPACING
  - CONTRACTOR'S STAGING AND STORAGE
  - EXISTING BUILDING
  - CONTRACTOR ACCESS
  - AIR TRAFFIC ACCESS

**CONSTRUCTION ACTIVITY PLAN  
 PHASING NOTES - PHASE 2**

1. THE CONTRACTOR SHALL PLACE ALL BARRICADES AS SHOWN PRIOR TO STARTING WORK ON THIS PHASE.
2. THE AIRPORT WILL REQUIRE 7 CALENDAR DAYS NOTICE FROM THE CONTRACTOR PRIOR TO INITIATING THIS PHASE TO COORDINATE WITH THE TENANTS.
3. ACCESS TO HANGAR #3 SHALL BE CONTINUOUS THROUGH PHASE 2.
4. CONTRACTOR SHALL PLACE BARRICADES AT BOTH ENDS OF THIS TAXIWAY.
5. CONTRACTOR SHALL PLACES BARRICADES AT BOTH ENDS OF PERIMETER ROAD.
6. PHASE 2 MAY BE CONCURRENT WITH PHASE 1.

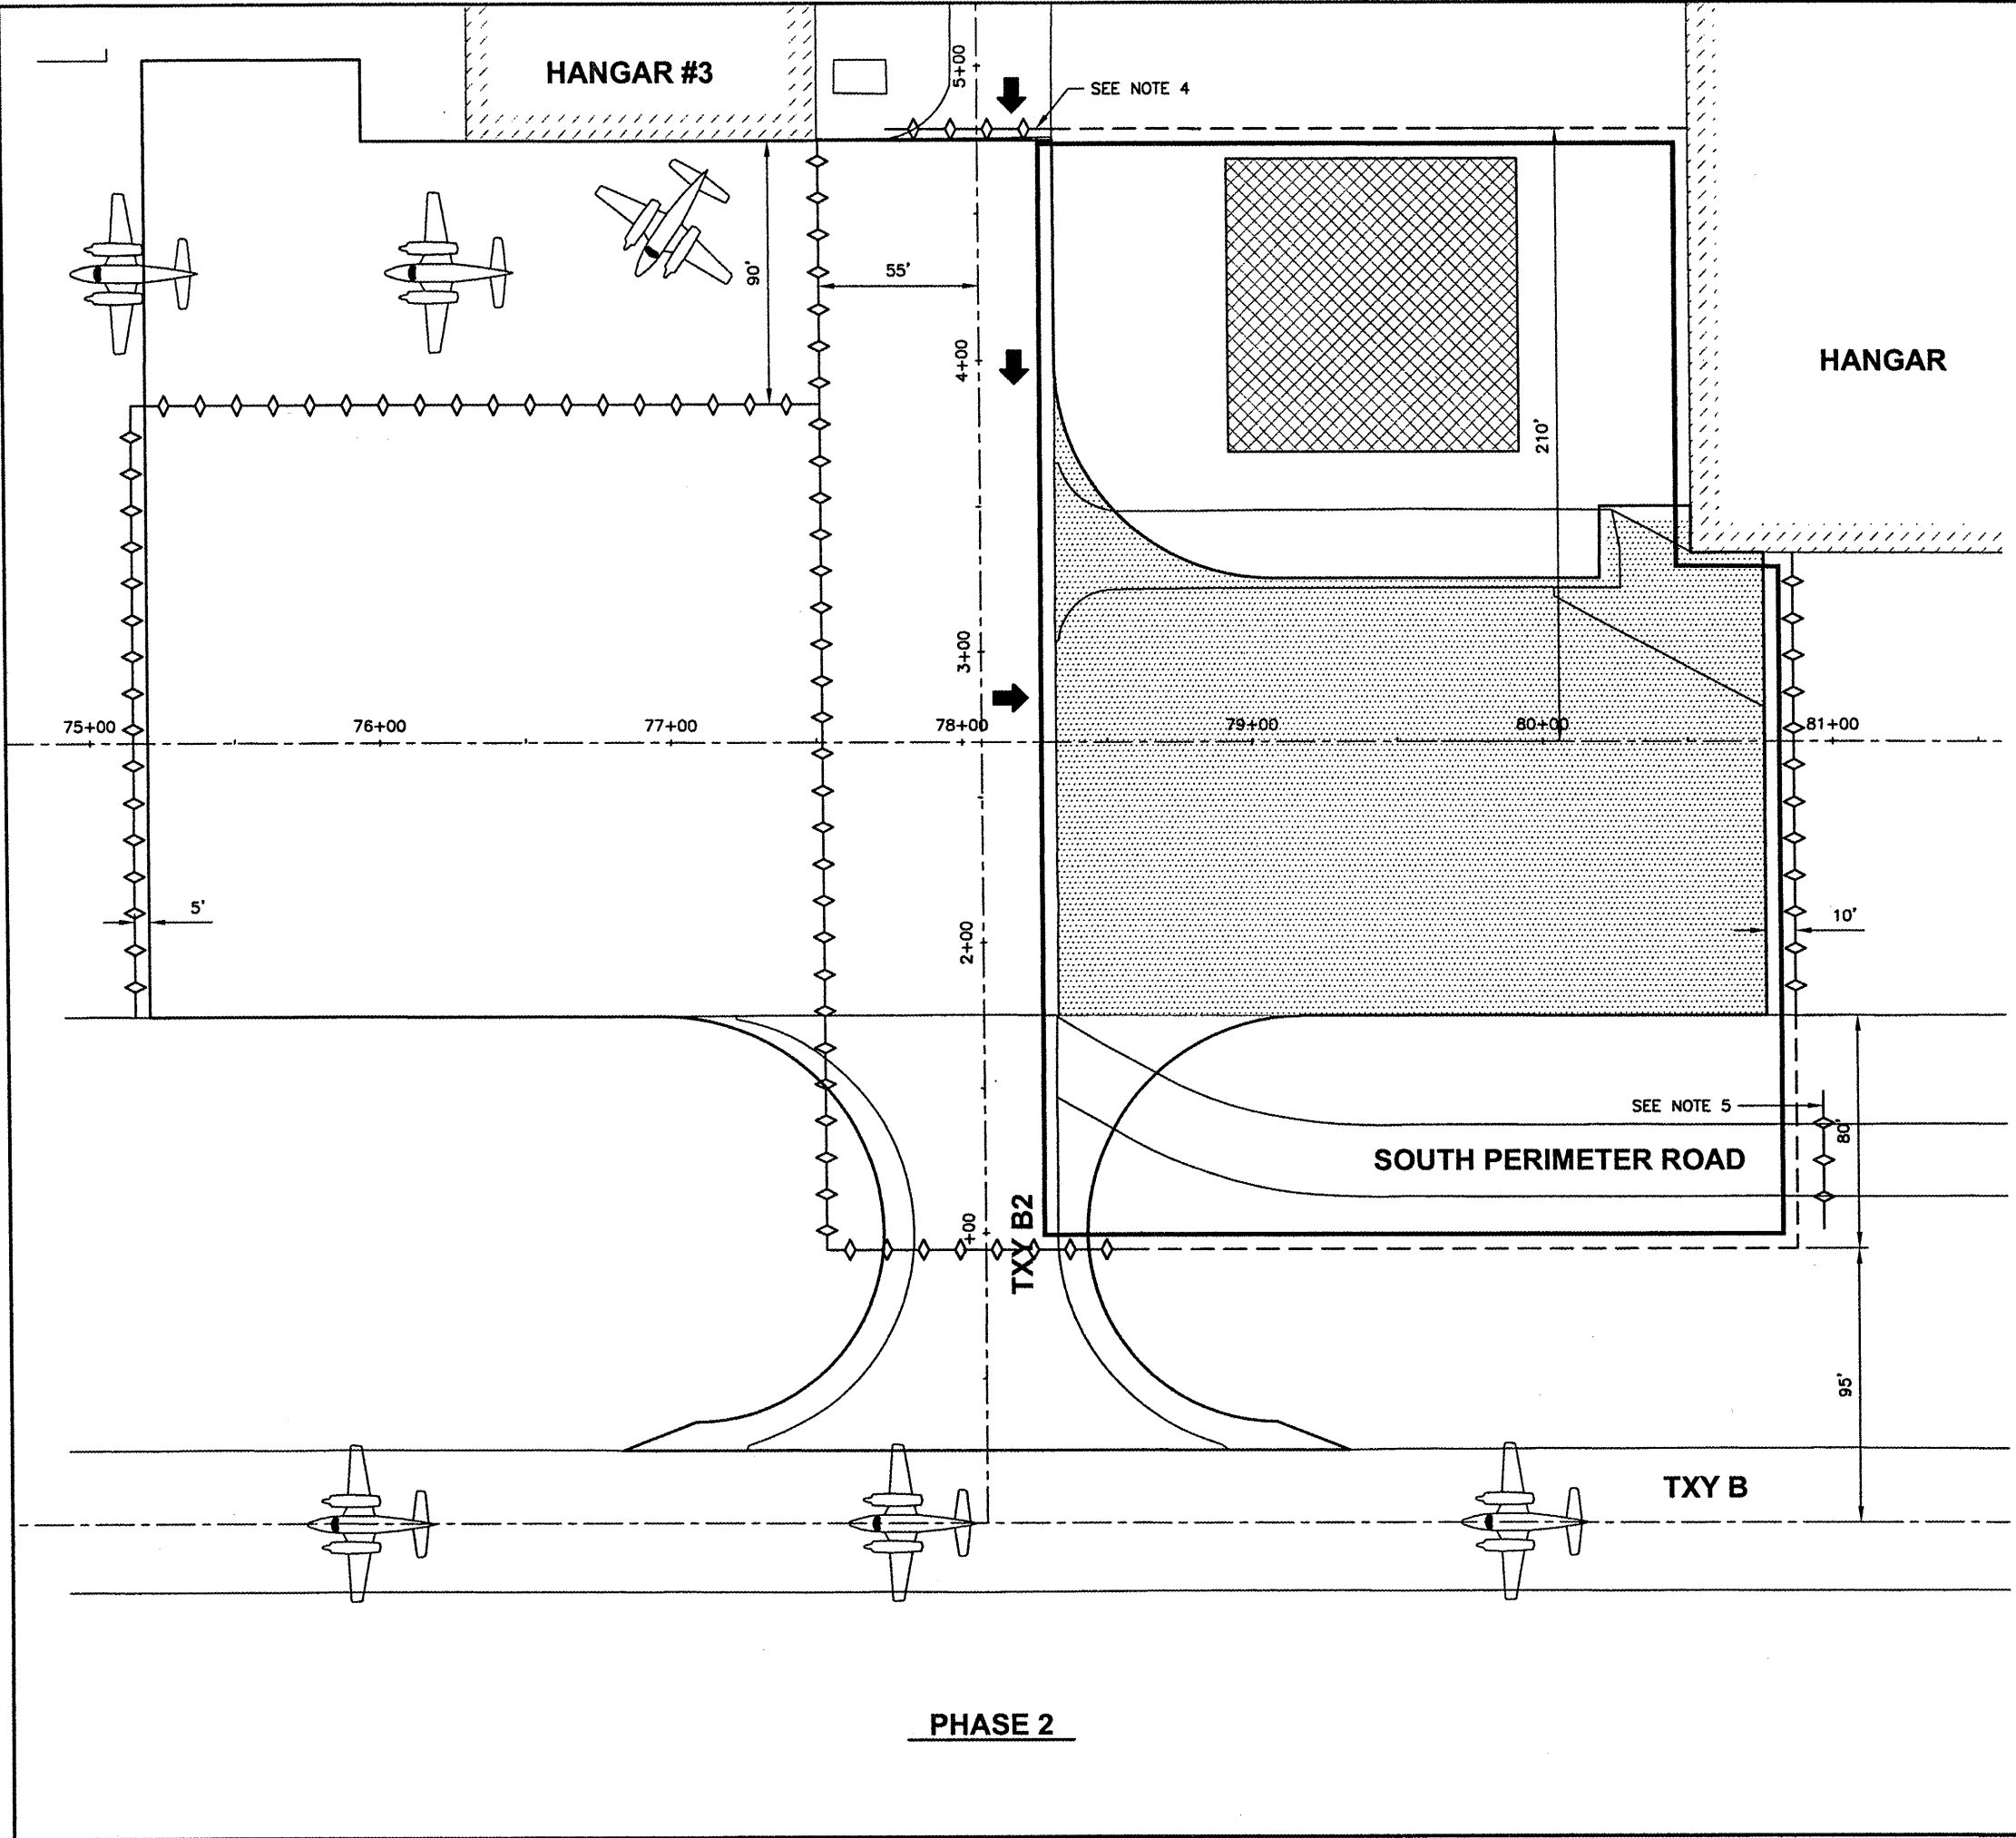

**PHASE 2**