


CA008

REVISIONS

NUMBER	BY	DATE




SPRINGFIELD AIRPORT AUTHORITY  
 ABRAHAM LINCOLN CAPITAL AIRPORT  
 SPRINGFIELD, ILLINOIS

RECONSTRUCT AND EXPAND THE SOUTHEAST RAMP  
 CONSTRUCTION ACTIVITY PLAN 3

© Copyright CMT, Inc.  
**CMT**  
 CRAWFORD, MURPHY & TILLY, INC.  
 CONSULTING ENGINEERS  
 License No. 184-000613

DESIGN BY:	RLV/KLB
DRAWN BY:	CMT
CHECKED BY:	<i>REW</i>
APPROVED BY:	<i>REW</i>
DATE:	JANUARY 27, 2009
JOB No:	08035-08
IL PROJ. NO.	SPI-3885
AIP PROJ. NO.	3-17-0096-XX
SHEET 06 OF 40 SHEETS	




LEGEND

- WORK LIMITS
- WORK AREA
- CONSTRUCTION SET BACK LINE
- BARRICADES IDOT TYPE 1 WITH RED LIGHTS AND 20" x 20" ORANGE FLAGS AT 20' SPACING
- CONTRACTOR'S STAGING AND STORAGE
- EXISTING BUILDING
- CONTRACTOR ACCESS
- AIR TRAFFIC ACCESS

CONSTRUCTION ACTIVITY PLAN  
 PHASING NOTES - PHASE 3

1. THE CONTRACTOR SHALL PLACE ALL BARRICADES AS SHOWN PRIOR TO STARTING WORK ON THIS PHASE.
2. THE AIRPORT WILL REQUIRE 7 CALENDAR DAYS NOTICE FROM THE CONTRACTOR PRIOR TO INITIATING THIS PHASE TO COORDINATE WITH THE TENANTS.
3. ACCESS TO HANGAR #3 SHALL BE CONTINUOUS THROUGH PHASE 3.
4. CONTRACTOR SHALL PLACE BARRICADES AT BOTH ENDS OF THIS TAXIWAY.
5. CONTRACTOR SHALL PLACES BARRICADES AT BOTH ENDS OF PERIMETER ROAD.
6. CONTRACTOR SHALL ALSO PLACE BARRICADES NEAR TXY B-1 & TXY B-3 AS DIRECTED BY THE AIRPORT TO CLOSE THIS PORTION OF TXY B.
7. PHASE 3 SHALL BE CONCURRENT WITH PHASE 1 OR 2.
8. THE CONTRACTOR WILL HAVE 14 CALENDAR DAYS TO COMPLETE THE WORK WITHIN 95' OF THE TXY B CENTERLINE.

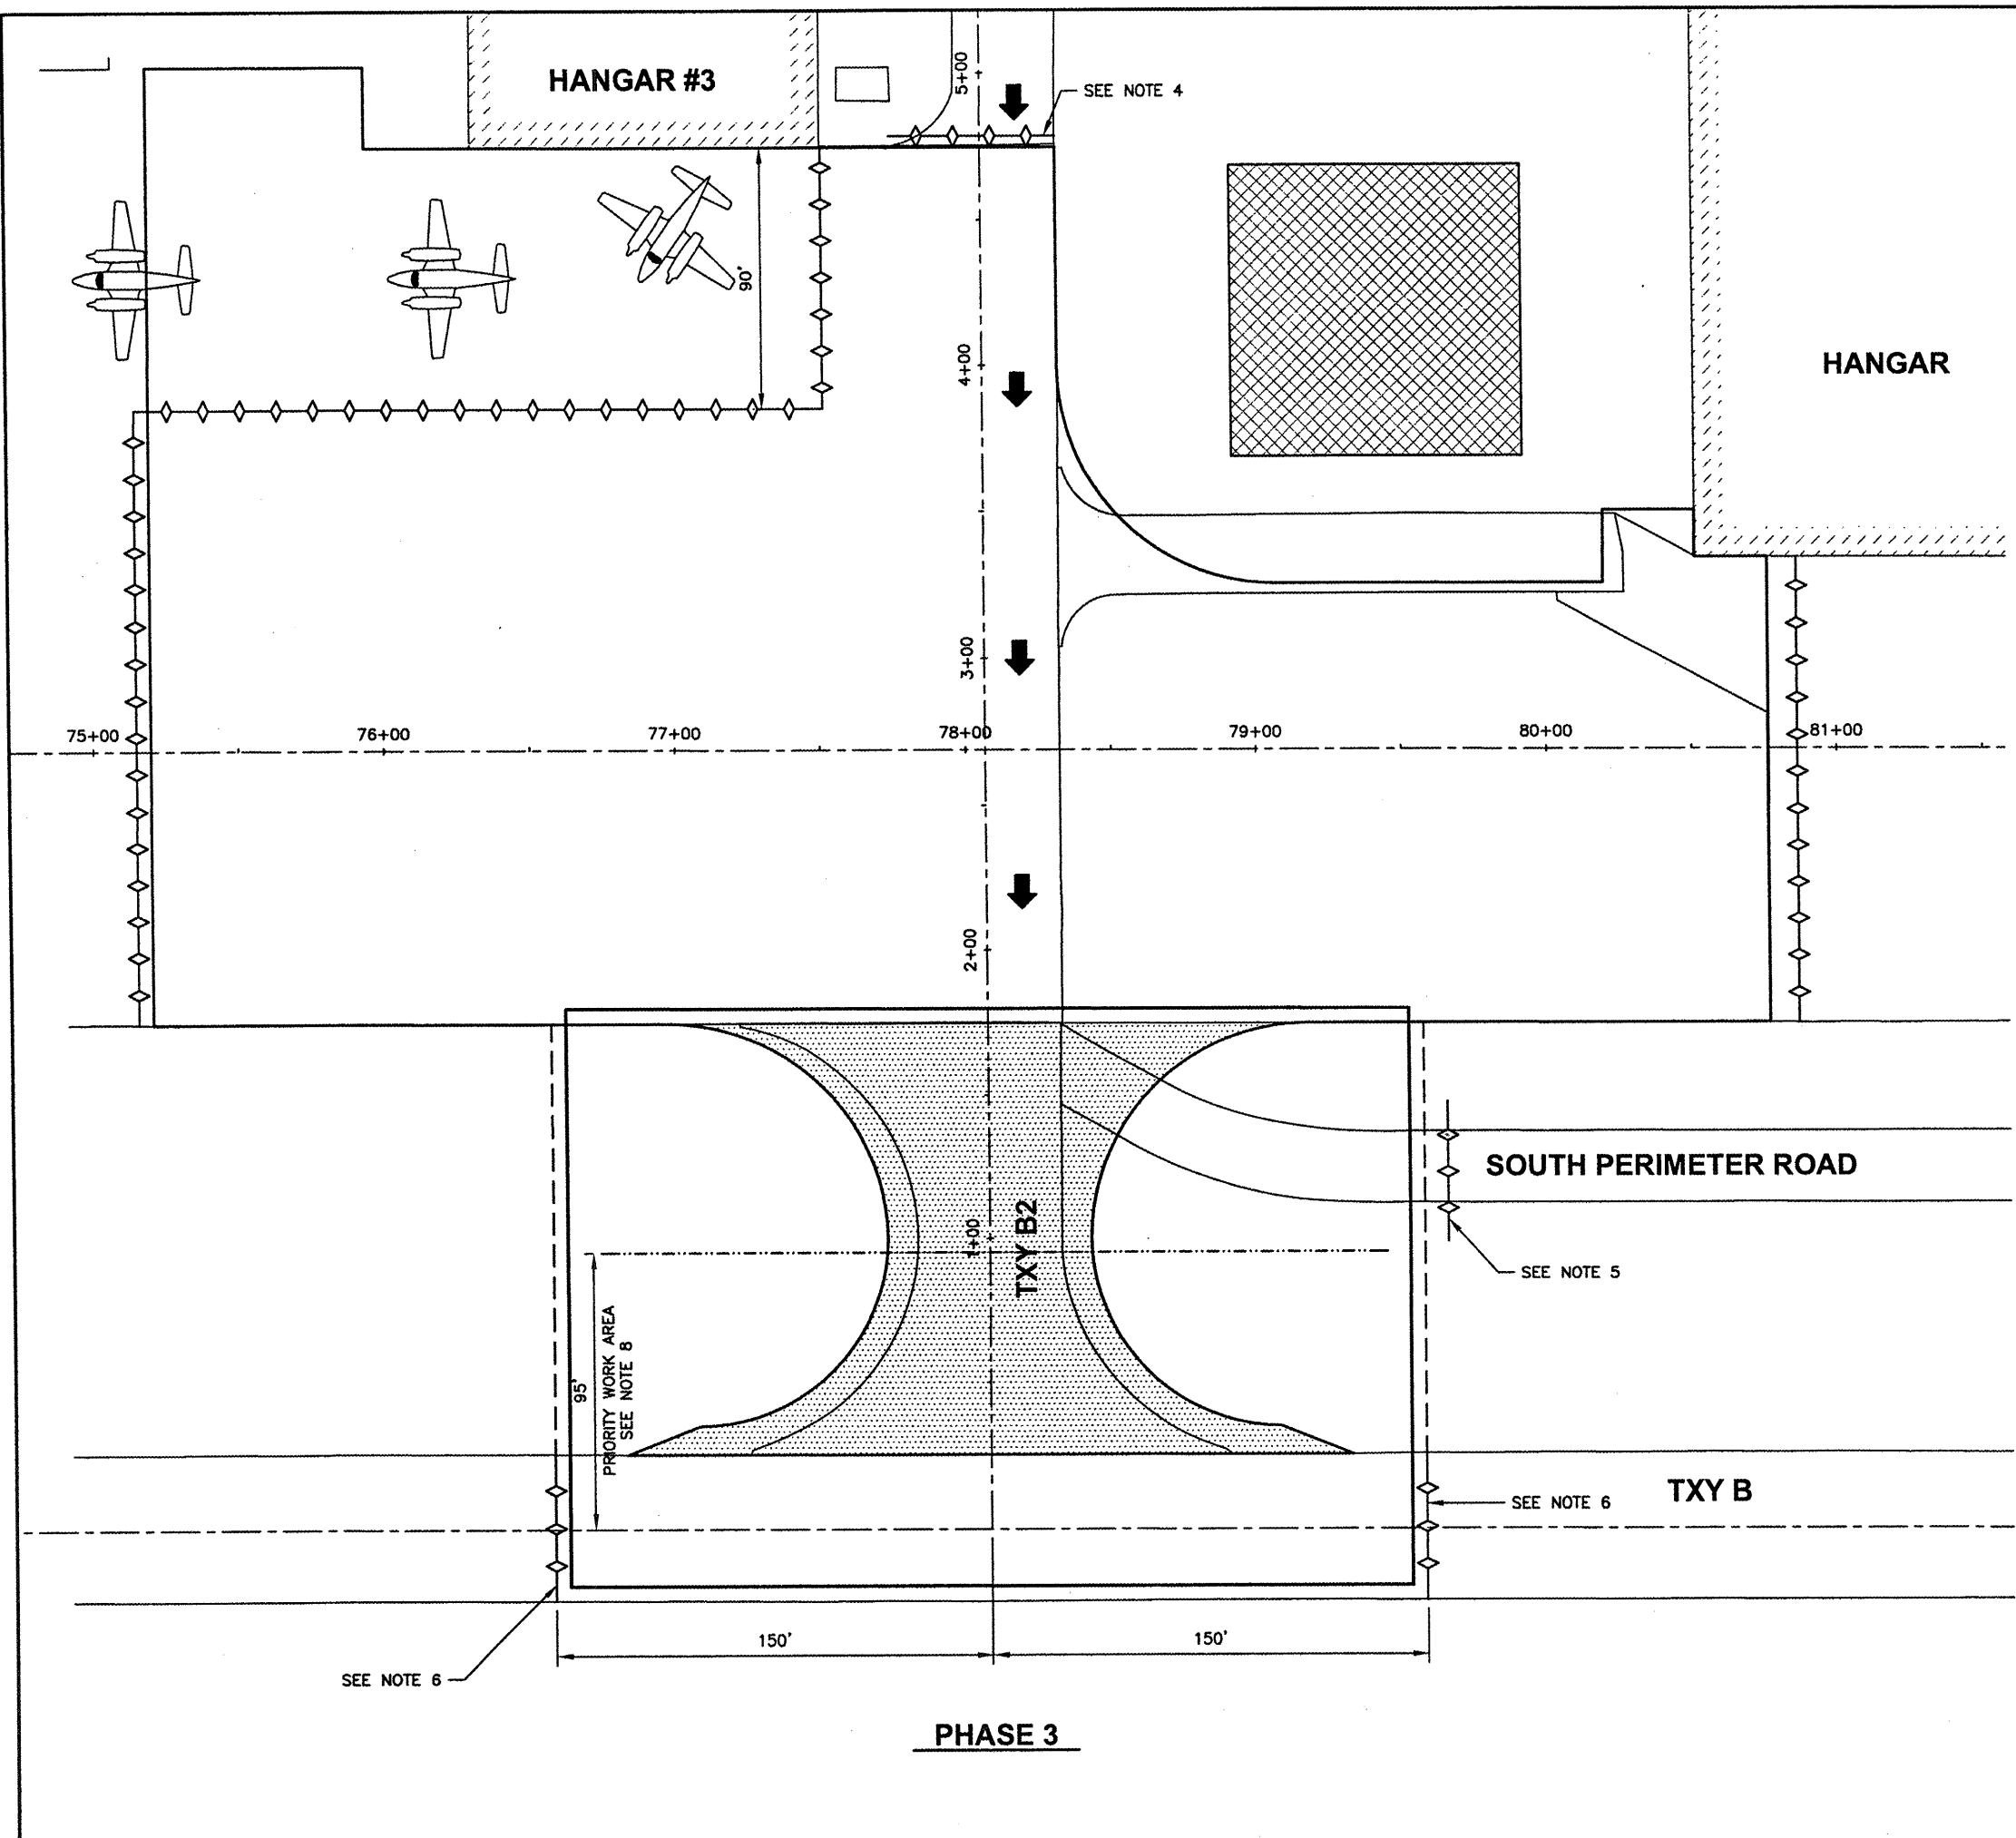

PHASE 3

SEE NOTE 6

SEE NOTE 5

SEE NOTE 6

SEE NOTE 4

PRIORITY WORK AREA  
 SEE NOTE 8

HANGAR #3

HANGAR

SOUTH PERIMETER ROAD

TXY B

TXY B2

75+00 76+00 77+00 78+00 79+00 80+00 81+00

5+00  
4+00  
3+00  
2+00

90'

95'

150' 150'