



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
326		LIVINGSTON	354	85
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
*(123,123XIRS-3,(124)RS-5,(123)BR-3				

PLACE TRAFFIC CONTROL SIGNS, STRIPING, AND DRUMS AS SHOWN IN STD. 701321, OR AS DIRECTED BY THE ENGINEER. CONSTRUCTION SPEED LIMIT 45 MPH

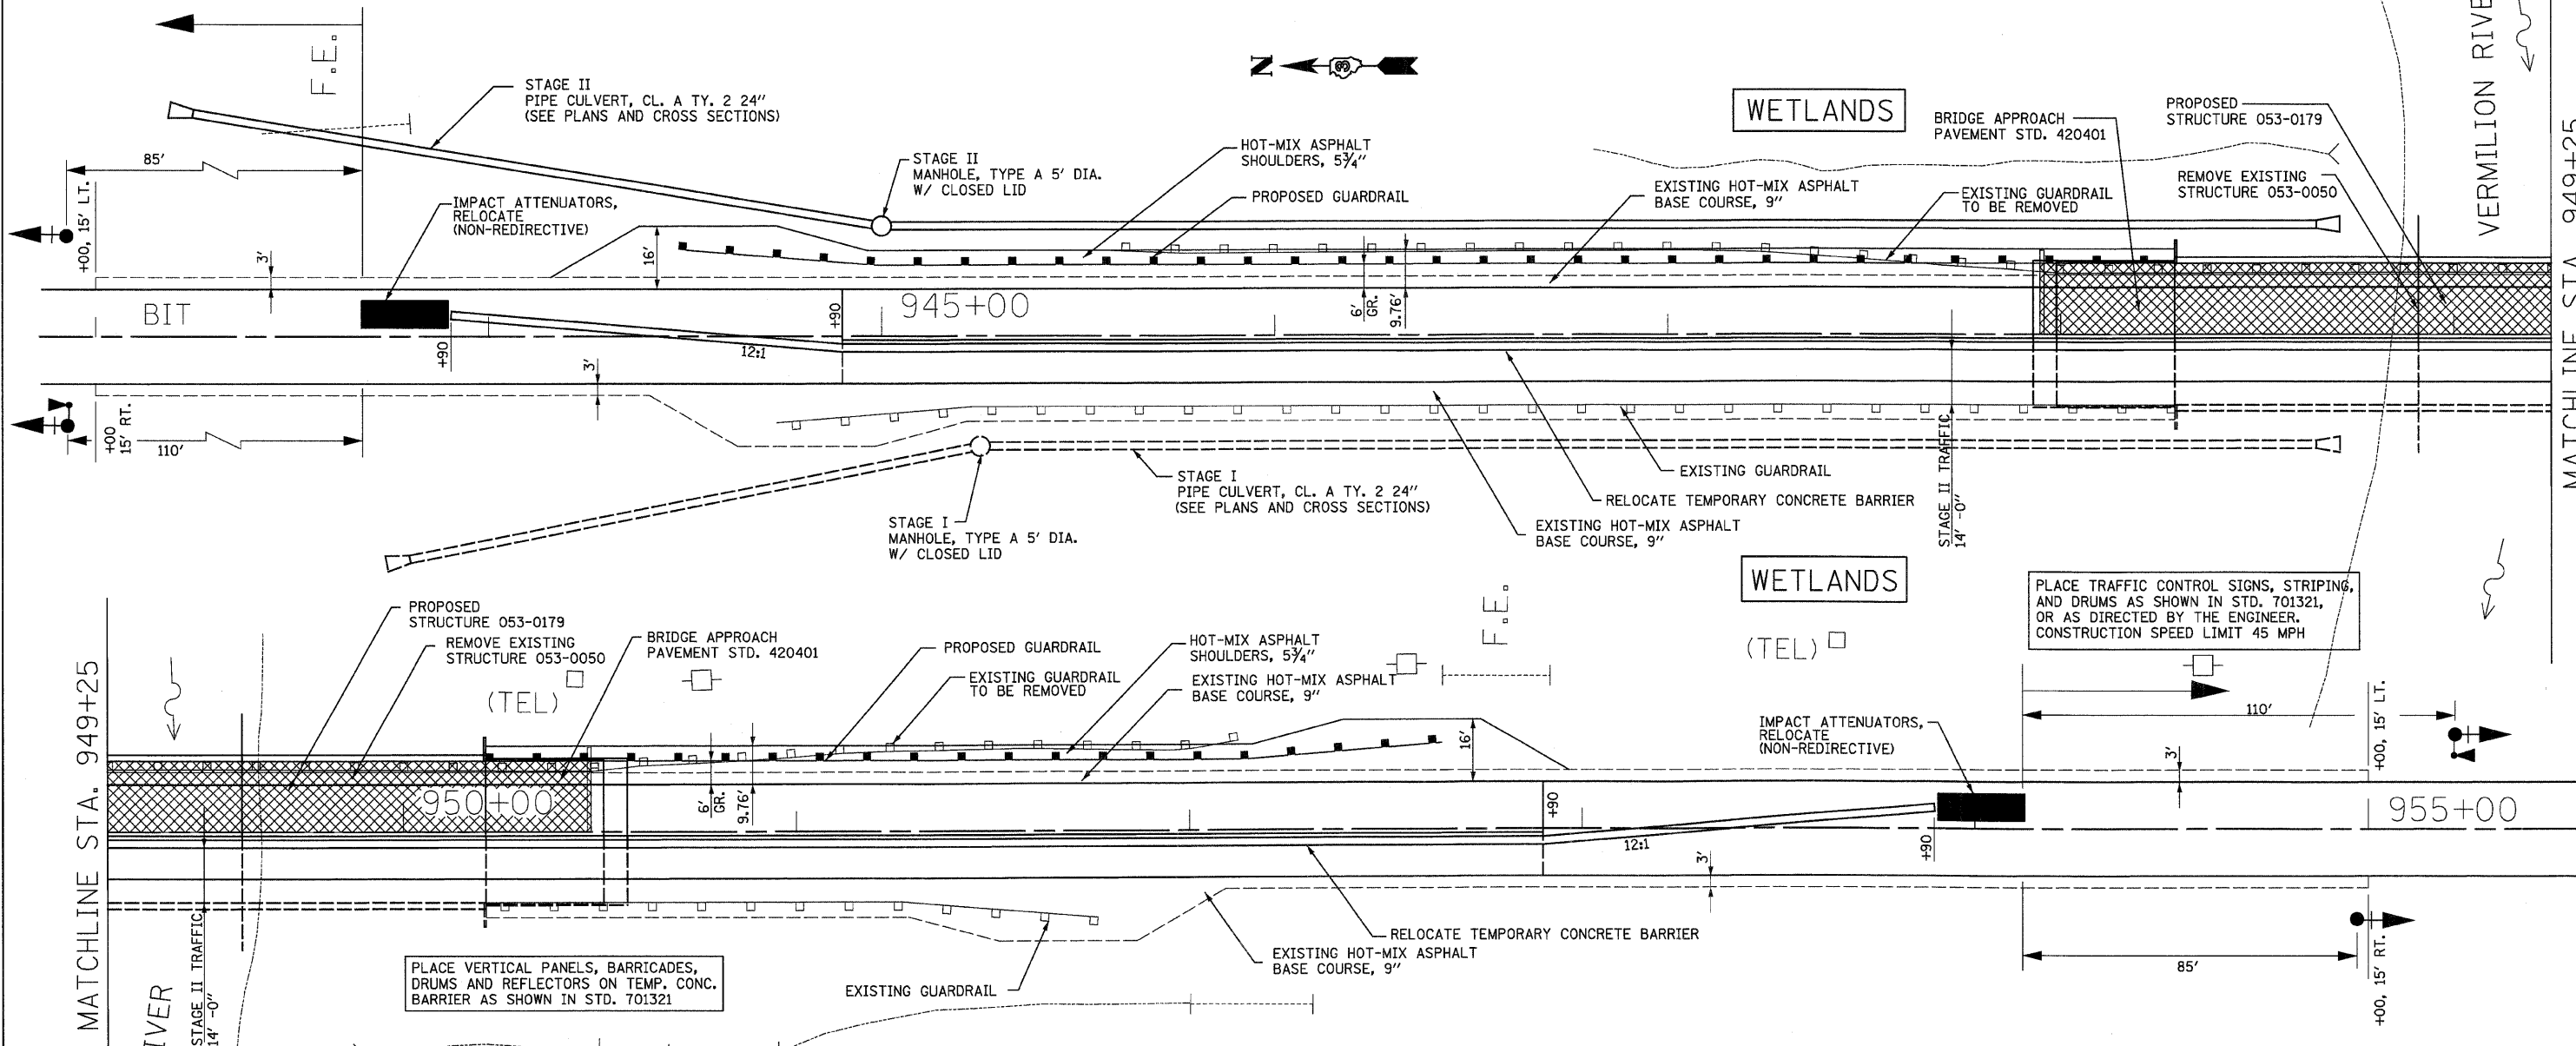

- STAGE II SEQUENCE OF OPERATIONS**
1. RELOCATE THE TEMPORARY CONCRETE BARRIER, ATTENUATORS, AND OTHER TRAFFIC CONTROL ITEMS AS SHOWN IN THESE DETAILS AND STANDARD 701321. REMOVE OR COVER THE WIDTH RESTRICTION SIGNING FROM STAGE I, THEN REDIRECT TRAFFIC TO SOUTHBOUND LANE.
  3. ERECT THE PERIMETER EROSION BARRIER AND HIGH VISIBILITY FENCING LT. SIDE AS PER THE PLANS. CONSTRUCT THE PROPOSED 24" PIPE AND MANHOLE LT. SIDE STA. 943+25 TO STA. 948+65.
  3. REMOVE THE STAGE II PORTION OF THE EXISTING STRUCTURE AND GUARDRAIL AS SHOWN ELSEWHERE IN THE PLANS AND THIS DETAIL.
  4. CONSTRUCT THE STAGE II PORTION OF THE NEW STRUCTURE, BRIDGE APPROACH PAVEMENT, HOT-MIX ASPHALT BINDER COURSE (GRADE RAISE), HOT-MIX ASPHALT SHOULDER AND GUARDRAIL AS SHOWN ELSEWHERE IN THE PLANS AND THIS DETAIL.
  5. REMOVE TRAFFIC CONTROL ITEMS AND REVERT TO TWO LANES OF TRAFFIC.
  6. COMPLETE ALL REMAINING WORK SUCH AS RESURFACING AND SHOULDERS AS SHOWN IN THE PLANS.



- REMOVAL ITEMS
- EXISTING SIGNAL HEAD W/BACKPLATE
- EXISTING SIGNAL HEAD W/BACKPLATE AND MICROWAVE DETECTOR

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

STATION 949+25  
STAGE II CONSTRUCTION PLANS

SCALE: VERT. DATE  
HORIZ. DRAWN BY CHECKED BY