


STAGE 3 CONSTRUCTION SEQUENCE

- REMOVE HMA BASE COURSE RUNAROUND, AGGREGATE FOR TEMPORARY ACCESS, AND TEMPORARY GUARDRAIL
- 2. COMPLETE GRADING TO FINAL SECTIONS AND SEEDING
- 3. INSTALL PIPE CULVERT AND CONSTRUCT PAVEMENT PATCHES AT STATION 153+00 UTILIZING TRAFFIC CONTROL AND PROTECTION, STANDARD 701201 UTILIZING FLAGGERS AS REQUIRED.
- CONSTRUCT AGGREGATE SHOULDERS, AGGREGATE/HMA ENTRANCES, AND ALL HMA SURFACE COURSE UP TO FINAL GRADE. PLACE FINAL STRIPING.

GENERAL NOTES

- FOR ALL ENTRANCES THAT WILL NOT BE REMOVED WITH THESE PLANS, THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL P.E.'S AT ALL TIMES. SIGNALS WILL BE REQUIRED AT THESE LOCATIONS.
- 2. ACCESS MUST BE PROVIDED TO ALL F.E.'S AS REQUIRED BY THE PROPERTY OWNER. NO SIGNALS WILL BE REQUIRED AT THESE LOCATIONS.
- 3. THIS TRAFFIC CONTROL PLAN SHALL BE USED IN CONJUNCTION WITH STANDARD 701321 AND AS DIRECTED BY THE ENGINEER.
- 4. VERTICAL PANELS, DRUMS WITH STEADY BURNING LIGHTS, TYPE III BARRICADES, SIGNS, MICROWAVE DETECTOR SYSTEMS, DETECTOR LOOPS, AND TYPE C BI-DIRECTIONAL REFLECTORS, SHALL BE INCLUDED IN THE COST OF THE PAY ITEM FOR "TRAFFIC CONTROL AND PROTECTION STANDARD 701321." TEMPORARY PAVEMENT MARKING AND TRAFFIC SIGNALS WILL BE PAID FOR SEPARATELY.
- 5. THE CONTRACTOR SHALL PROVIDE AND ERECT LANE WIDTH RESTRICTION SIGNING. THESE SIGNS SHALL BE PLACED AS DIRECTED BY THE ENGINEER BEFORE IMPLEMENTING ANY STAGE 1 TRAFFIC CONTROL.
- 6. THE CONTRACTOR SHALL NOTIFY THE DISTRICT 6 TRAFFIC SECTION OF THE BUREAU OF OPERATIONS PH: (217) 785-5836 AT LEAST 21 DAYS PRIOR TO IMPLEMENTING STAGE 1 TRAFFIC CONTROL AND WHEN SWITCH IN STAGING IS MADE.
- 7. THE CONTRACTOR SHALL NOTIFY THE DISTRICT 6 TRAFFIC SECTION OF THE BUREAU OF OPERATIONS PH: (217) 524-9161 AT LEAST THREE (3) DAYS PRIOR TO ACTIVATING THE TEMPORARY TRAFFIC SIGNALS, PLEASE REFER TO THE DISTRICT 6 SPECIAL PROVISIONS FOR TEMPORARY BRIDGE TRAFFIC SIGNALS FOR CONTACT INFORMATION.

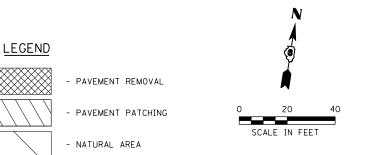



USER NAME = sparksgw	DESIGNED -	MCV	REVISED -	
FILE NAME = D672B62-sht-staging3.dgn	DRAWN -	СММ	REVISED -	
PLOT SCALE = 40.0000 '/ in.	CHECKED -	мтм	REVISED -	
PLOT DATE = Dec-18-2012 10:19:43AM	DATE -	12/12	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

IL 9/96 OVER DRAINAGE DITCH Traffic control & protection — Stage 3								

F.A.P. RTE.	SECTION			COUNTY	TOTAL SHEETS	SHEE
685	113B-4			HANCOCK	57	21
		П	CONTRACT	NO. 7	2B62	
	ILLINOIS	FED.	ΑI	D PROJECT		