
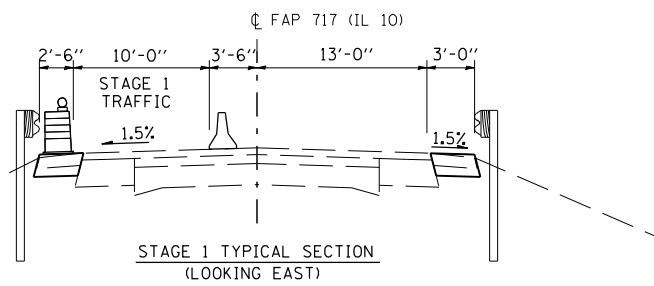


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
717	101B-1	LOGAN	49	13
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STAGE 1 TRAFFIC CONTROL

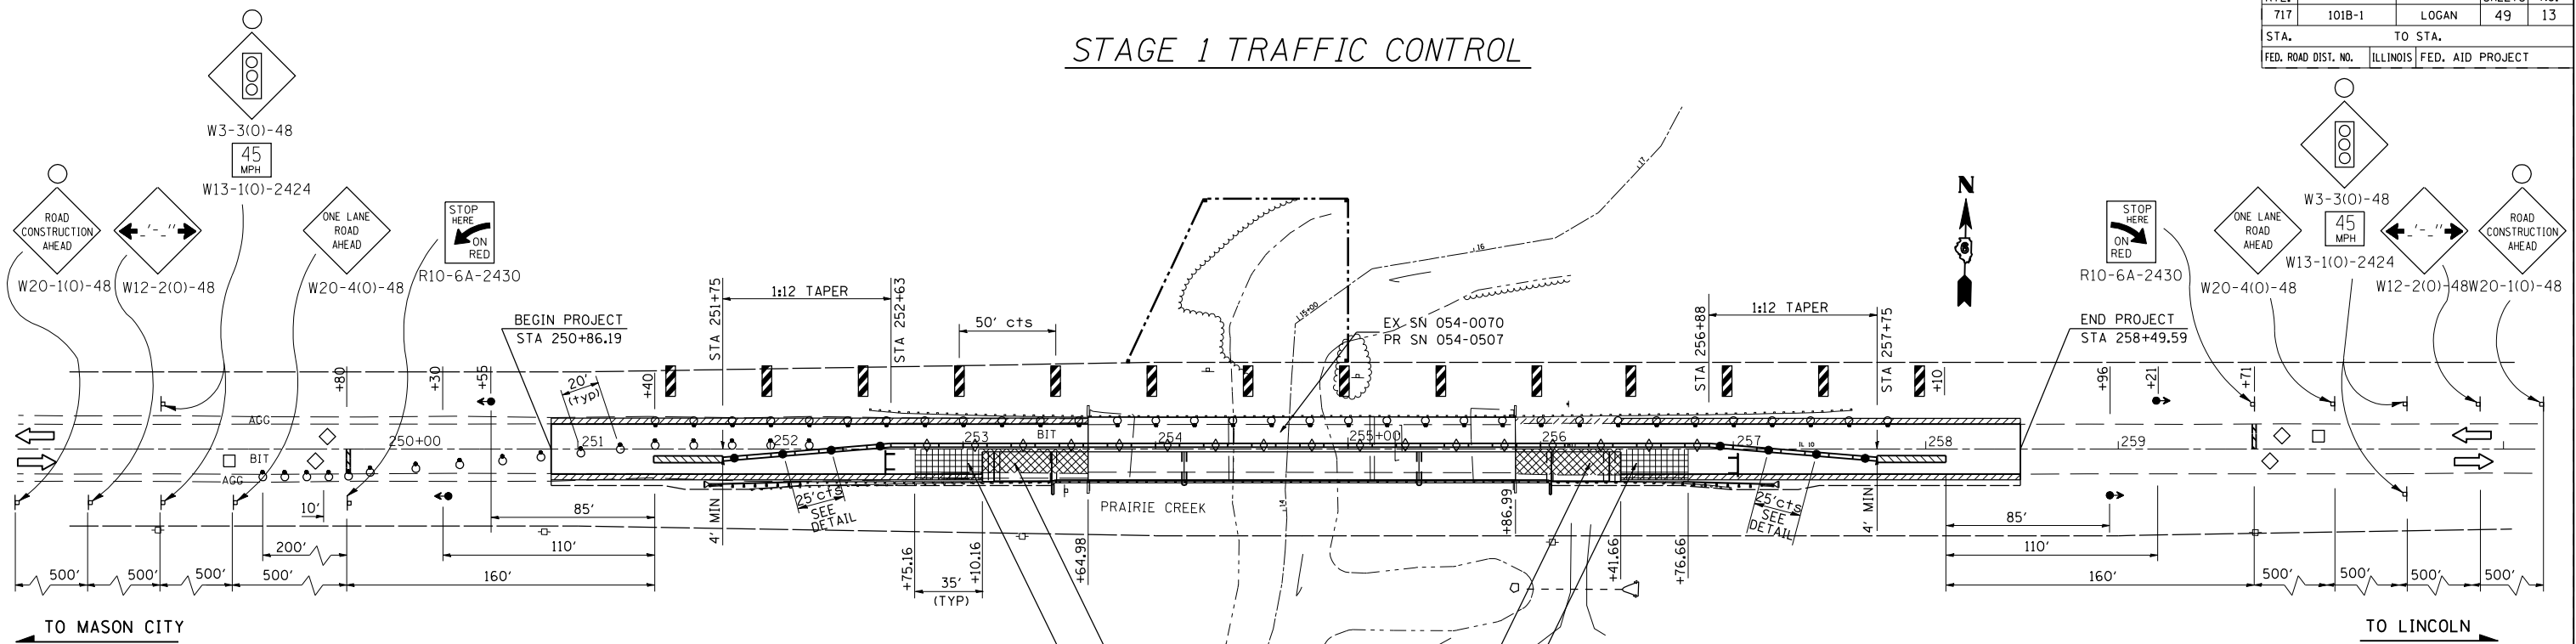

- Preliminary Stage
1. Set up traffic control as per TC&P 701326.
 2. Construct Hot-Mix Asphalt Base Cse Widening, 10" LT.
 3. Install temporary bridge traffic signals, temporary concrete barrier, vertical panels, drums, and impact attenuators as per staging plan sheets and TC&P 701321 including removal of conflicting pavement markings.

- Sequence of Stage 1 Construction
1. Divert traffic to the Stage 1 lane.
 2. Remove Guardrail RT. Locations are indicated on schedule of quantities.
 3. Remove Pavement and Approach Slab RT. Locations are indicated on schedule of quantities.
 4. Install Temporary Sheet Piling
 5. Remove and Replace Structure RT.
 6. Construct Hot-Mix Asphalt Base Cse Widening, 10" RT.
 7. Construct Approach Pavement, Pavement Connectors, and Ramps RT.
 8. Install Guardrail RT.

LEGEND

- PAVEMENT REMOVAL
- IMPACT ATTENUATOR, NARROW
- TEMPORARY BARRIER WALL
- HOT-MIX ASPHALT BINDER COURSE) RAMP
- HOT-MIX ASPHALT BASE CSE WID, 10"
- DOUBLE VERTICAL PANEL
- SIGN
- INDUCTION LOOP DETECTOR
- TEMPORARY BRIDGE TRAFFIC SIGNALS
- DRUM WITH STEADY BURNING LIGHT
- 24" STOP BAR
- TYPE III BARRICADES
- TYPE C BIDIRECTIONAL REFLECTOR
- STEADY BURNING LIGHTS AND DOUBLE VERTICAL PANELS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
STAGE 1 TRAFFIC CONTROL
STANDARD 701321 (SPECIAL)
 FAP 717 (IL 10)
 Section: 101B-1
 Logan County
 SCALE: 1" = 40'
 DATE _____ DRAWN BY _____ CHECKED BY _____

PLOT DATE = 12/12/2006
 FILE NAME = c:\p\projects\653405\stg1\stage.dgn
 PLOT SCALE = 84.7876 / IN.
 USER NAME = laughlinr1