F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
95	*	JASPER	546	101
STA. 710+00.00		TO STA. 740+00.00		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

*(5,6)Y,RS-2,6BR-7
CONTRACT NO. 94437

STAGE 2 CONSTRUCTION SCHEDULE
(FOR INFORMATION ONLY)

STAGE II

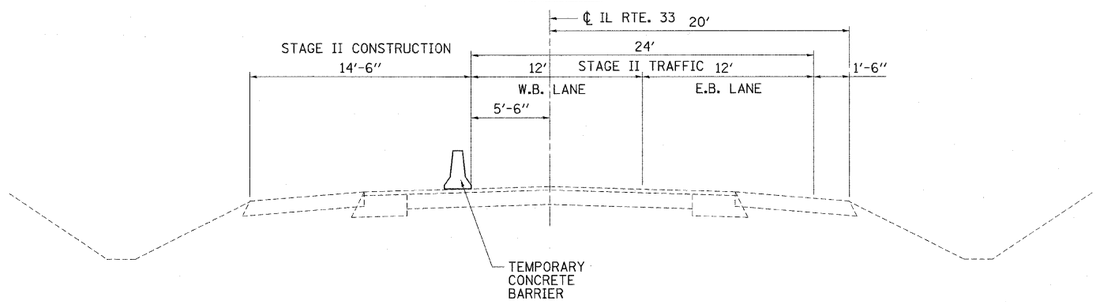

STAGING TYPICAL SECTION
STA. 904+25 TO 912+50

RELOCATE TEMPORARY CONCRETE BARRIER

LT. STA. 907+50 TO STA. 909+25	=	175	FOOT
TOTAL	=	175	FOOT

IMPACT ATTENUATORS RELOCATE, (NON-REDIRECTIVE), TEST LEVEL 2

STA. 907+50, LT.	=	1	EACH
STA. 909+25, LT.	=	1	EACH
TOTAL	=	2	EACH

PAVEMENT REMOVAL

LT. STA. 908+36.56	=	38	SQ. YD.
TOTAL	=	38	SQ. YD.

GUARDRAIL REMOVAL

LT. STA. 906+85 TO STA. 910+19	=	334	FOOT
TOTAL	=	334	FOOT

TEMPORARY PAVEMENT MARKING LINE - 4″ ***

LT. STA. 904+25 TO 912+50 (YELLOW)	=	825	FOOT
STA. 904+25 TO STA, 912+50 (DOUBLE YELLOW)	=	1650	FOOT
RT. STA. 904+25 TO STA, 912+50 (YELLOW)	=	825	FOOT
TOTAL	=	3300	FOOT

WORK ZONE PAVEMENT MARKING REMOVAL **

LT. STA. 904+25 TO 912+50	=	272	SQ. FT.
STA. 904+25 TO STA. 912+50	=	545	SQ. FT.
RT. STA. 904+25 TO STA. 912+50	=	272	SQ. FT.
TOTAL	=	1089	SQ. FT.

HOT-MIX ASPHALT BASE COURSE, 12″

LT. STA. 908+36.56	=	4	SQ. YD.
TOTAL	=	4	SQ. YD.

HOT-MIX ASPHALT SHOULDERS, 8″

LT. STA. 908+00 TO STA. 908+44	=	39	SQ. YD.
TOTAL	=	39	SQ. YD.

NOTE:

1. SEE SHEET NO. 97 FOR ADDITIONAL QUANTITIES.

** REMOVED UPON COMPLETION OF STAGE 2

*** PAID FOR UNDER TRAFFIC CONTROL AND PROTECTION, (SPECIAL), LOCATION 1.

DESIGN		
INT.	DATE	REASON

PLOTS & CHECKS			
INT.	DATE	NO.	REASON

CHECKS		
INT.	DATE	REASON

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
STAGE 2 CONSTRUCTION SCHEDULE OF QUANTITIES
CULVERT @ STA. 908+36.56
FAP ROUTE 95 (IL RTE. 33)
SECTION (5,6)Y,RS-2,6BR-7
JASPER COUNTY

SCALE: VERT. HORIZ.
DATE: 04/15/03
DRAWN BY: BISHOP
DESIGNED BY: COLBROOK
CHECKED BY: COLBROOK

GREENE & BRADFORD, INC. OF SPRINGFIELD
CONSULTING ENGINEERS
300 CONSTITUTION DRIVE
SPRINGFIELD, ILLINOIS 62707
REGISTERED DESIGN FIRM NO. 184-001073
HIGH CASTLE TRANSPORTATION CONSULTING CORPORATION
(217) 793-8814, (217) 793-4217 FX, E-MAIL - cadesign@greenebr-bdford.com

COMPUTER FILE NO. STAGE-12 - 30
PROJECT 01256
2/26/10-FAV