F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
95	*	JASPER	546	222
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

*(5,6)Y,RS-2,6BR-7
CONTRACT NO. 94437

N

0 20 40
SCALE IN FEET

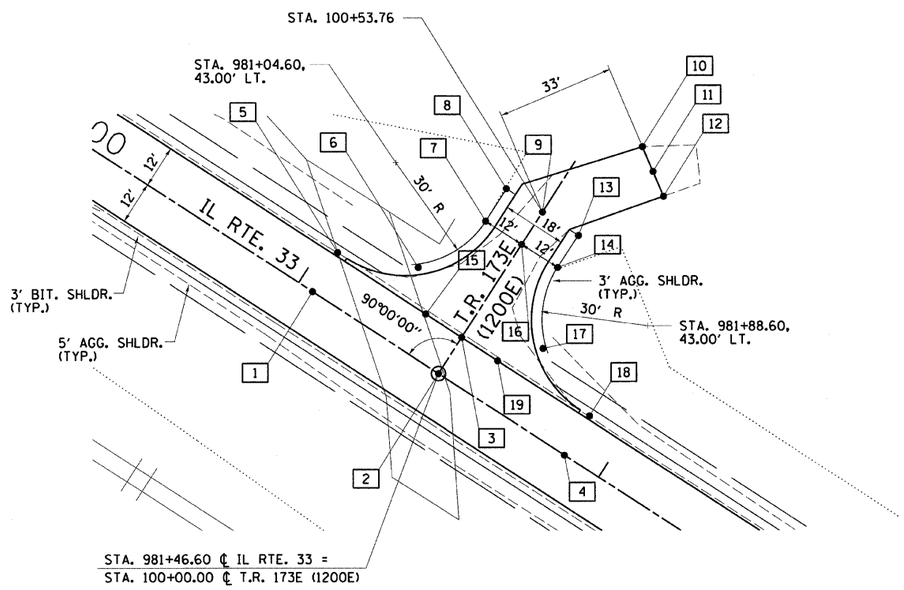

T.R. 173E (1200N)

T.R. 173E (1200N)					
BOX NUMBER	STATIONING ALONG IL. RTE. 33	OFFSET FEET	STATIONING ALONG T.R. 173E	OFFSET FEET	ELEVATION FEET
1	981+04.60	0.00 RT	100+00.00	42.00 LT	564.78
2	981+46.60	0.00 RT	100+00.00	0.00 RT	564.81
3	981+46.60	12.00 LT	100+12.00	0.00 LT	564.63
4	981+88.60	0.00 RT	100+00.00	42.00 RT	564.88
5	981+04.60	13.00 LT	100+13.00	42.00 LT	564.59
6	981+25.81	21.79 LT	100+21.79	20.79 LT	564.00
7	981+34.60	43.00 LT	100+43.00	12.00 LT	563.41
8	981+34.60	53.76 LT	100+53.76	12.00 LT	563.27
9	981+46.60	53.76 LT	100+53.76	0.00 LT	563.51
10	981+60.23	84.30 LT	N/A	N/A	563.47
11	981+66.47	80.07 LT	N/A	N/A	563.33
12	981+72.72	75.84 LT	N/A	N/A	563.19
13	981+58.60	53.76 LT	100+53.76	12.00 RT	563.27
14	981+58.60	43.00 LT	100+43.00	12.00 RT	563.41
15	981+34.60	12.00 LT	100+12.00	12.00 LT	564.62
16	981+46.60	43.00 LT	100+43.00	0.00 LT	563.65
17	981+67.39	21.79 LT	100+21.79	20.78 RT	564.36
18	981+88.60	13.00 LT	100+13.00	42.00 RT	564.69
19	981+58.60	12.00 LT	100+12.00	12.00 RT	564.65

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

INTERSECTION DETAILS

FAP ROUTE 95 (IL RTE. 33)
SECTION (5,6)Y,RS-2,6BR-7
JASPER COUNTY

SCALE: VERT.
HORIZ.
DATE: 08/21/02

DRAWN BY: JAMESON
DESIGNED BY: COLBROOK
CHECKED BY: COLBROOK

GREENE & BRADFORD, INC.
OF SPRINGFIELD
STRUCTURAL ENGINEERS
300 CONSTITUTION DRIVE
SPRINGFIELD, ILLINOIS 62707
PROFESSIONAL DESIGN FIRM NO. 184-000170
PROFESSIONAL DESIGN FIRM EXPIRATION
(217) 793-8894, (217) 793-3227 (FAX) E-MAIL: GBSPRINGFIELD@GBFGROUP.COM

COMPUTER FILE NO.
INT-03-B
PROJECT 01256
2/26/10-FAV

DESIGN

INT.	DATE	REASON

PLAN
NOTE BOOK NO.
SURVEYED
PLOTTED
ALIGNMENT CHECKED
RT. OF WAY CHECKED
CADD FILE NAME
BY
DATE

PLOTS & CHECKS

INT.	DATE	NO.	REASON

PROFILE
NOTE BOOK NO.
SURVEYED
PLOTTED
GRADES CHECKED
BRIDGE LOCATED
STRUCTURE NOTAT'NS CH'KD
BY
DATE

CHECKS

INT.	DATE	REASON

IDOTPL-20 - 1:20 8/25/98