


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
T.R. 82	01-11135-00-BR	DeWITT	17	17
ROAD DIST.	ILLINOIS	WAPELLA	CONTRACT NO. 91302	

**DESCRIPTION OF INTENDED SEQUENCE OF MAJOR CONSTRUCTION ACTIVITIES WHICH WILL DISTURB EARTH AND LEAD TO POSSIBLE EROSION FOR MAJOR PORTIONS OF THE CONSTRUCTION SITE:**

1. PLACEMENT OF PERIMETER EROSION CONTROL FENCE PRIOR TO THE COMMENCEMENT OF ANY ROAD OR BRIDGE WORK. SEE STD. 280001.
2. REMOVAL OF EXISTING STRUCTURE.
3. CONSTRUCTION OF THE REPLACEMENT STRUCTURE.
4. PLACEMENT OF ROADWAY EMBANKMENT TO RAISE THE ROADWAY TO THE PROPOSED GRADE.
5. DRAINAGE STRUCTURES, INCLUDING DITCHES, WILL BE INSTALLED BEFORE AND/OR DURING THE COMPLETION OF THE EMBANKMENT.
6. PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROL.
7. PLACEMENT OF PERMANENT EROSION CONTROL.
8. REMOVAL AND PROPER CLEAN UP OF TEMPORARY EROSION CONTROL.
9. FINAL GRADING, PLACING AGGREGATE AND OTHER MISCELLANEOUS ITEMS.

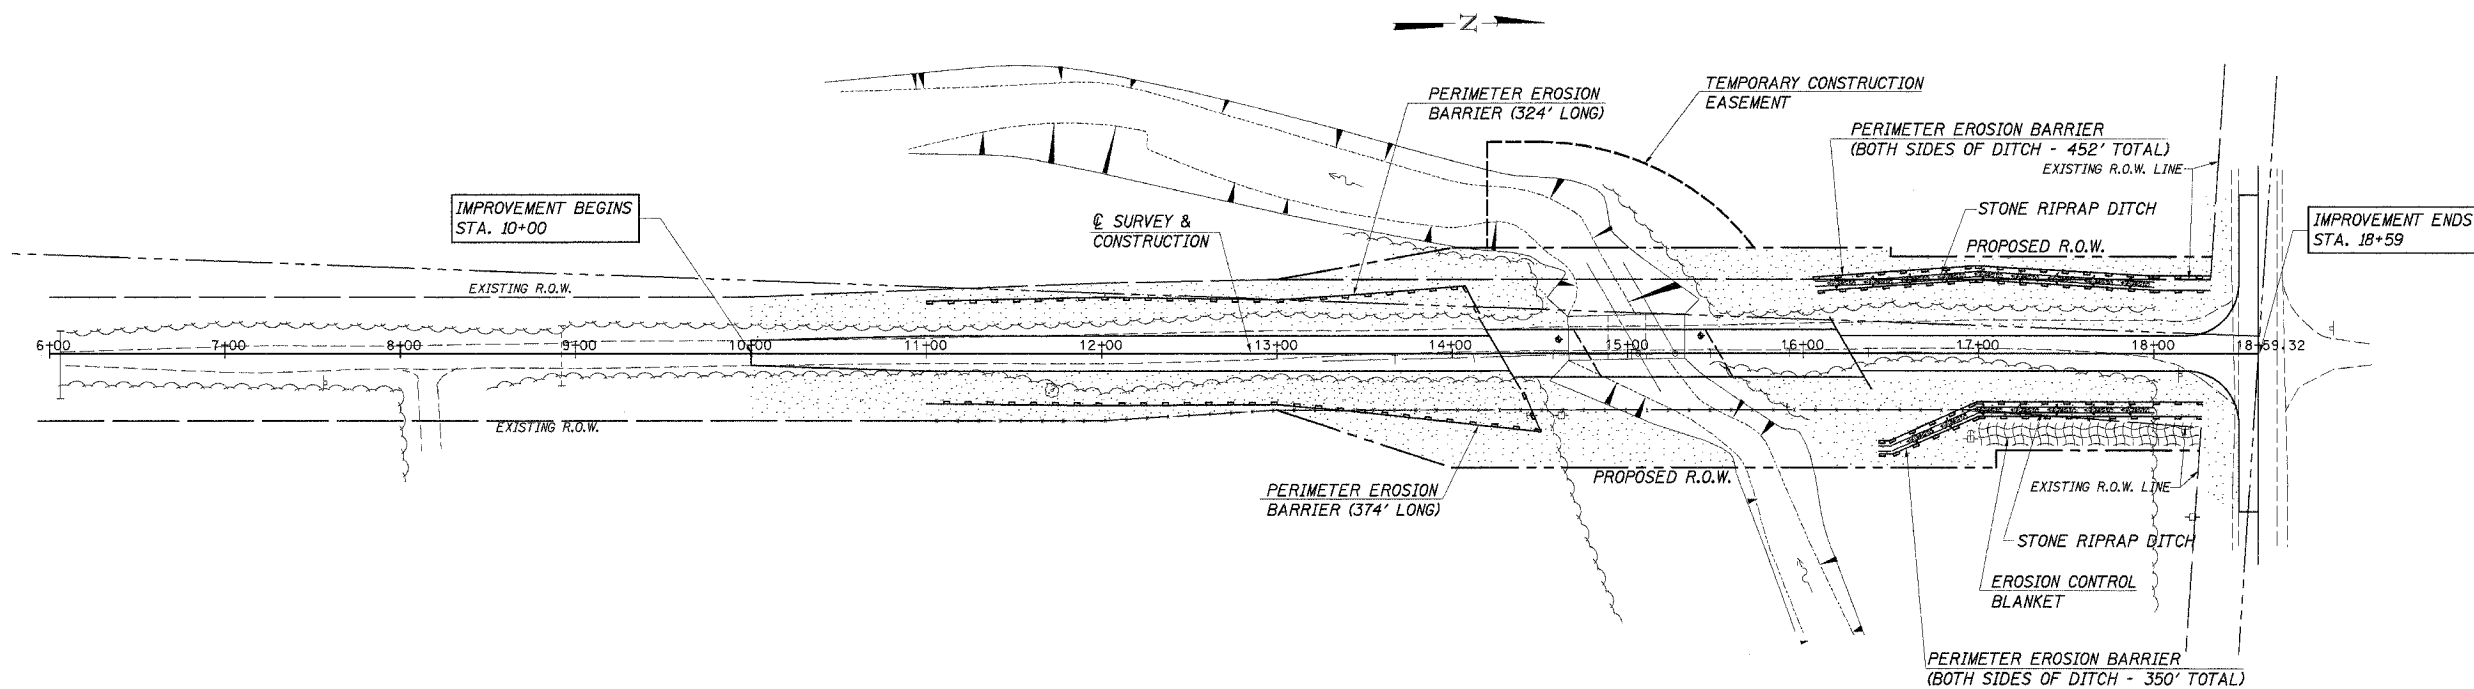

<b>TEMPORARY EROSION CONTROL:</b>	
	PERIMETER EROSION BARRIER
	EROSION CONTROL BLANKET
<b>PERMANENT EROSION CONTROL:</b>	
	SEEDING, CLASS 2 (SPECIAL)
	STONE RIPRAP DITCH

**BILL OF MATERIAL**

ITEM	UNIT	QUANTITY
TEMPORARY EROSION CONTROL SEEDINGS	POUND	260
PERIMETER EROSION BARRIER	FOOT	1500
EROSION CONTROL BLANKET	SQ YD	237

THE ABOVE QUANTITIES ARE ESTIMATES ONLY. ACTUAL QUANTITIES FOR EROSION CONTROL WILL BE DETERMINED BY THE ENGINEER IN THE FIELD AND THERE WILL BE NO ADJUSTMENT IN ANY PRICE DUE TO A CHANGE IN PLAN QUANTITY.

**EROSION CONTROL PLAN**

SECTION 01-11135-00-BR  
WAPELLA ROAD DISTRICT  
DeWITT COUNTY  
STA. 15+27

4440 ASH GROVE  
SPRINGFIELD, IL 62707  
(217) 793-8600  
oasinc@famvid.com

**OZYURT AND STONE, INC.**  
CONSULTING ENGINEERS

JOB NO.: 0209  
FILE: EROSION.DGN  
DATE: 05-10-04