SIGN DETAIL

1:75

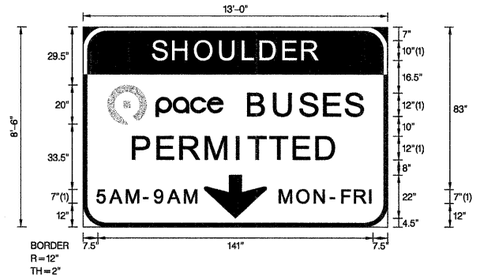

FONT:
(1) ClearviewHwy-5-W

Panel Style: REG2.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	2A
WIDTH x HGHT.	13'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: White
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black,White /Black

SYMBOL	ROT	X	Y	WID	HT
pace	0	12.5	52.5	59.4	20
ARDOWN	0	62	4.5	32	22

Panel Style: REG2.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																	LENGTH	SERIES/SIZE
S	H	O	U	L	D	E	R																											ClearviewHwy-5-W
35.9	46.4	57.7	70.5	82.2	91.3	102.9	112.6																										84.1	10
B	U	S	E	S																														ClearviewHwy-5-W
85.1	98.4	111.5	124.1	134.9																													58.4	12
P	E	R	M	I	T	T	E	D																										ClearviewHwy-5-W
26.2	38.7	50.4	63.5	79.3	85.2	96.2	108.4	120.1																									103.6	12
5	A	M	–	9	A	M																												ClearviewHwy-5-W
7.5	14.1	22.6	31.8	37	43.8	52.4																											51.3	7
M	O	N	–	F	R	I																												ClearviewHwy-5-W
101	109.9	118.9	127.4	132.9	139.5	147.1																											47.5	7

1.13.11

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - SEW	REVISED -
		DRAWN - SEW	REVISED -
	PLOT SCALE = $SCALE$	CHECKED - ST	REVISED -
	PLOT DATE = $DATE$	DATE - 12/2010	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN DETAIL SHEETS
I-55 BUS ON SHOULDER PROJECT

SCALE: N.T.S. | SHEET NO. 2 OF 7 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	2010-079-RS	DUPAGE	96	81
		CONTRACT NO. 60L67		
	ILLINOIS	FED. AID PROJECT		