CURVE WOLFP-1

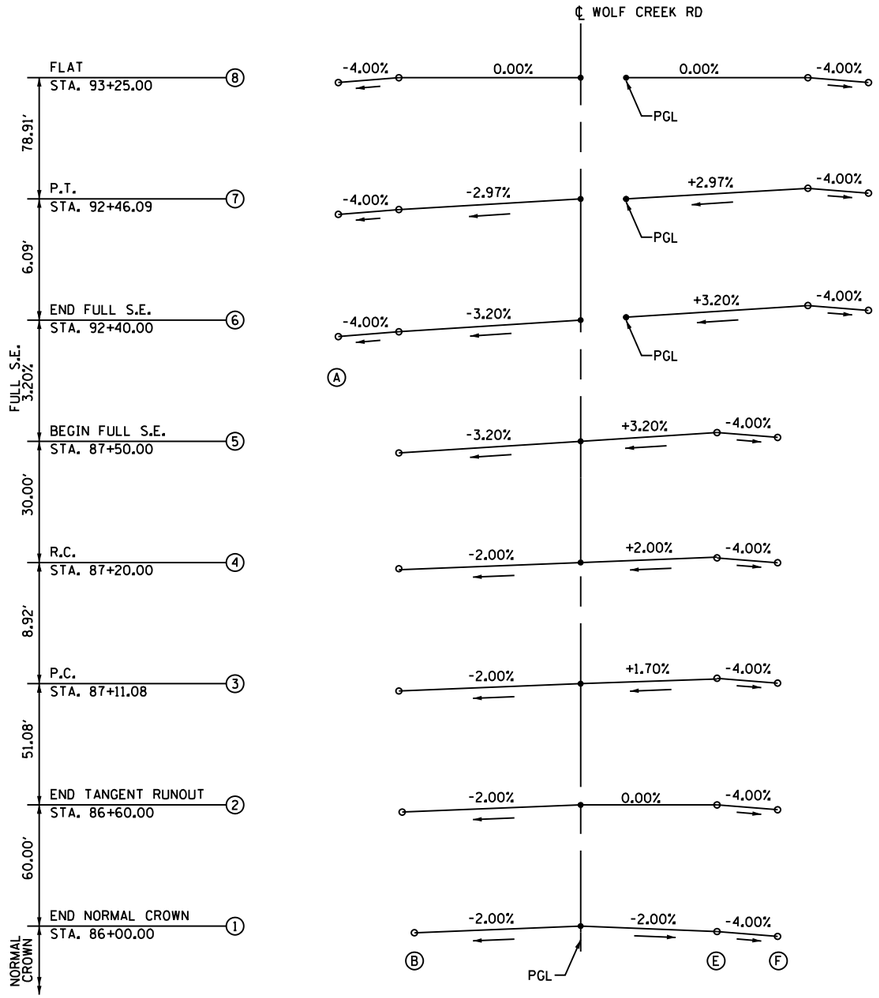

CURVE WOLFP-2

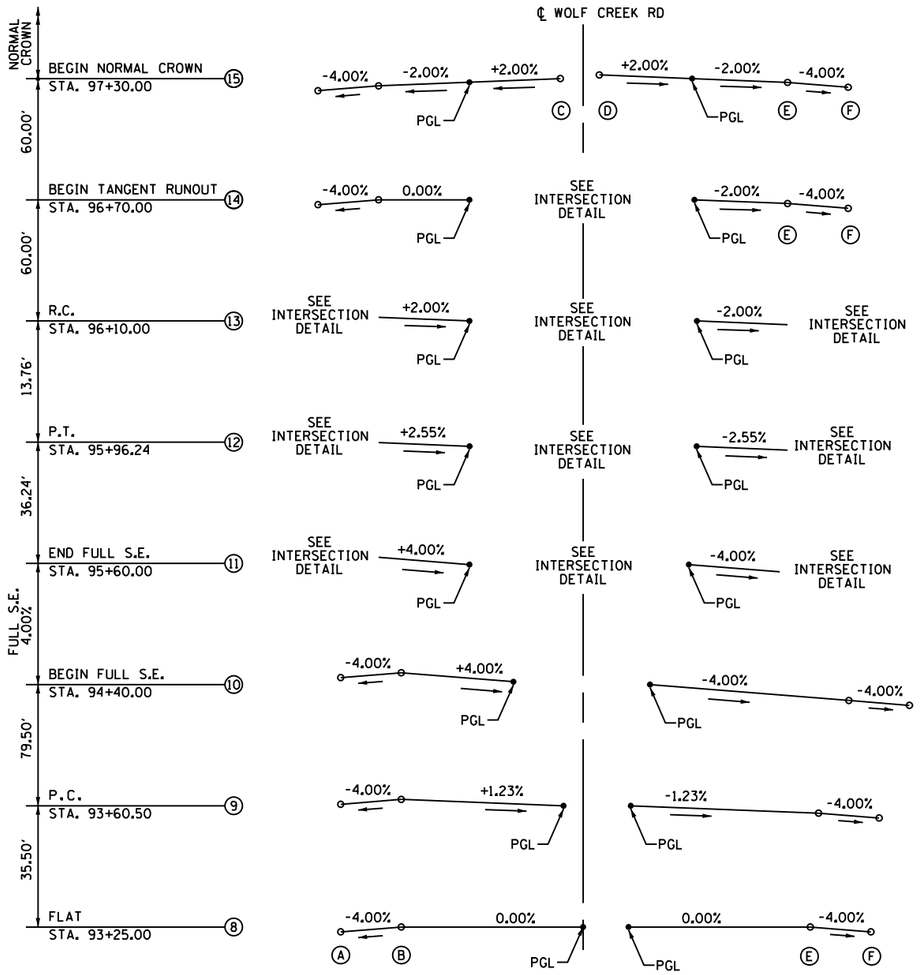

PROFILE GRADE ELEVATIONS

SECTION	PGL ELEV.	Ⓐ ELEVATION	Ⓐ OFFSET FROM PGL	Ⓑ ELEVATION	Ⓑ OFFSET FROM PGL	Ⓒ ELEVATION	Ⓒ OFFSET FROM PGL	Ⓓ ELEVATION	Ⓓ OFFSET FROM PGL	Ⓔ ELEVATION	Ⓔ OFFSET FROM PGL	Ⓕ ELEVATION	Ⓕ OFFSET FROM PGL
①	482.08			481.64	21.95′					481.72	18.00′	481.40	26.00′
②	482.18			481.71	23.57′					482.18	18.00′	481.86	26.00′
③	481.74			481.26	24.00′					482.04	18.00′	481.72	26.00′
④	481.61			481.13	24.00′					481.97	18.00′	481.65	26.00′
⑤	481.08			480.31	24.00′					481.65	18.00′	481.33	26.00′
⑥	468.93	467.84	32.00′	468.16	24.00′					469.70	24.00′	469.38	32.00′
⑦	468.90	467.87	32.00′	468.19	24.00′					469.61	24.00′	469.29	32.00′
⑧	468.90	468.58	32.00′	468.90	24.00′					468.90	24.00′	468.58	32.00′
⑨	469.11	469.05	29.42′	469.37	21.42′					468.80	24.70′	468.48	32.70′
⑩	470.05	470.41	20.58′	470.64	14.80′					468.99	26.49′	468.67	34.50′
⑪	472.57												
⑫	473.39												
⑬	473.71												
⑭	475.06	474.74	20.00′	475.06	12.00′					474.82	12.00′	474.50	20.00′
⑮	476.18	475.62	20.00′	475.94	12.00′	476.42	12.00′	476.44	12.84′	475.94	12.00′	475.62	20.00′

NOTES;

1. FOR CURVE DATA, SEE ALIGNMENT, TIES AND BENCHMARKS DRAWINGS.
2. FOR MORE PAVEMENT ELEVATIONS, SEE INTERSECTIONS DETAILS.

FILE NAME = c:\pw_work\pwidot\lavenderba\d0363618\D078221-sht-SE-02.dgn	USER NAME = $USER$	DESIGNED - KN	REVISED -
		DRAWN - AS	REVISED -
	PLOT SCALE = 20.0000 ' / in.	CHECKED -	REVISED -
	PLOT DATE = 1/31/2014	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUPERELEVATION DETAIL
WOLF CREEK RD

SCALE: | SHEET NO. 2 OF 10 SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
331	(1-3)R-2, N-4, TS-4, HBK-1	WILLIAMSON	733	116
DRAWING NO. SE-02		CONTRACT NO. 78221		
		ILLINOIS FED. AID PROJECT		