


- NOTES: 1. CORRUGATED MEDIAN (MODIFIED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 606 OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE PORTIONS OF STATE STANDARD 606306.
  - 2. WITH THE APPROVAL OF THE ENGINEER. THE CONTRACTOR
    MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE
    OBTAINED BY MILLING THE HMA SURFACE TO BE REMOVED.
    SAW CUT WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)
  - 3. PAVEMENT FABRIC WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)

## DETAILS FOR CORRUGATED MEDIAN (MODIFIED)

THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE FOOT (SQUARE METER) FOR "CORRUGATED MEDIAN (MODIFIED)"

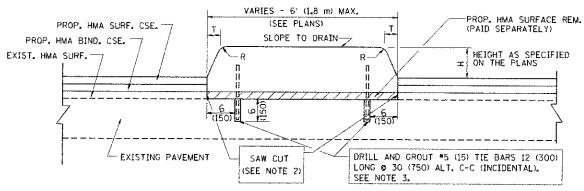

Н	Ŕ	Ţ
6(150)	1(25)	1(25)
9(225)	1(25)	2(50)

NOTES: I. CONCRETE MEDIAN TYPE SB (DOWELLED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF STATE STANDARD 606301 AND SECTION 606 OF THE STANDARD SPECIFICATIONS.

- 2. WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR
  MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE
  OBTAINED BY MILLING THE HMA SURFACE TO BE REMOVED,
  SAW CUT WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"
- 3. FOR MEDIAN WIDTH LESS THAN 4' (1.2 m) USE ONE ROW OF #5 (15) BARS @ 30 (750) C-C ALONG THE MEDIAN CENTERLINE. TIE BARS WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"

## DETAILS FOR CONCRETE MEDIAN

## TYPE SB (DOWELLED)

THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SOUARE FOOT (SOUARE METER) FOR "CONCRETE MEDIAN TYPE SB (DOWELLED)"

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE: NONE

ALL DIMENSIONS ARE IN [NCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.