


STAGE 1

NOTES

PRESTAGE 1
CORE OUT AGGREGATE SHOULDERS AND BUILD AGG. SUBGRADE IMPROVEMENT AND HMA SHOULDERS, 5 1/2" FROM Rt. AND Lt. Sta. 1482+50 - 1497+00; PLACE TEMPORARY PIPE CULVERTS @ AR CULVERTS - Rt. AND Lt. Sta. 1484+99 AND Rt. AND Lt. Sta. 1494+03; PERFORM EARTHWORK @ Rt. AND Lt. Sta. 1482+50 - Rt. AND Lt. Sta. 1497+00

STAGE 1

1. SET UP TRAFFIC CONTROL AND PROTECTION STANDARD 701321 FOR WORK @ AR CULVERT 1484+99.
2. CONSTRUCT WEST SIDE OF THE CULVERT (D/S END) TO STAGE LINE.
3. CONSTRUCT CLASS C PATCH AND TEMPORARY PAVEMENT

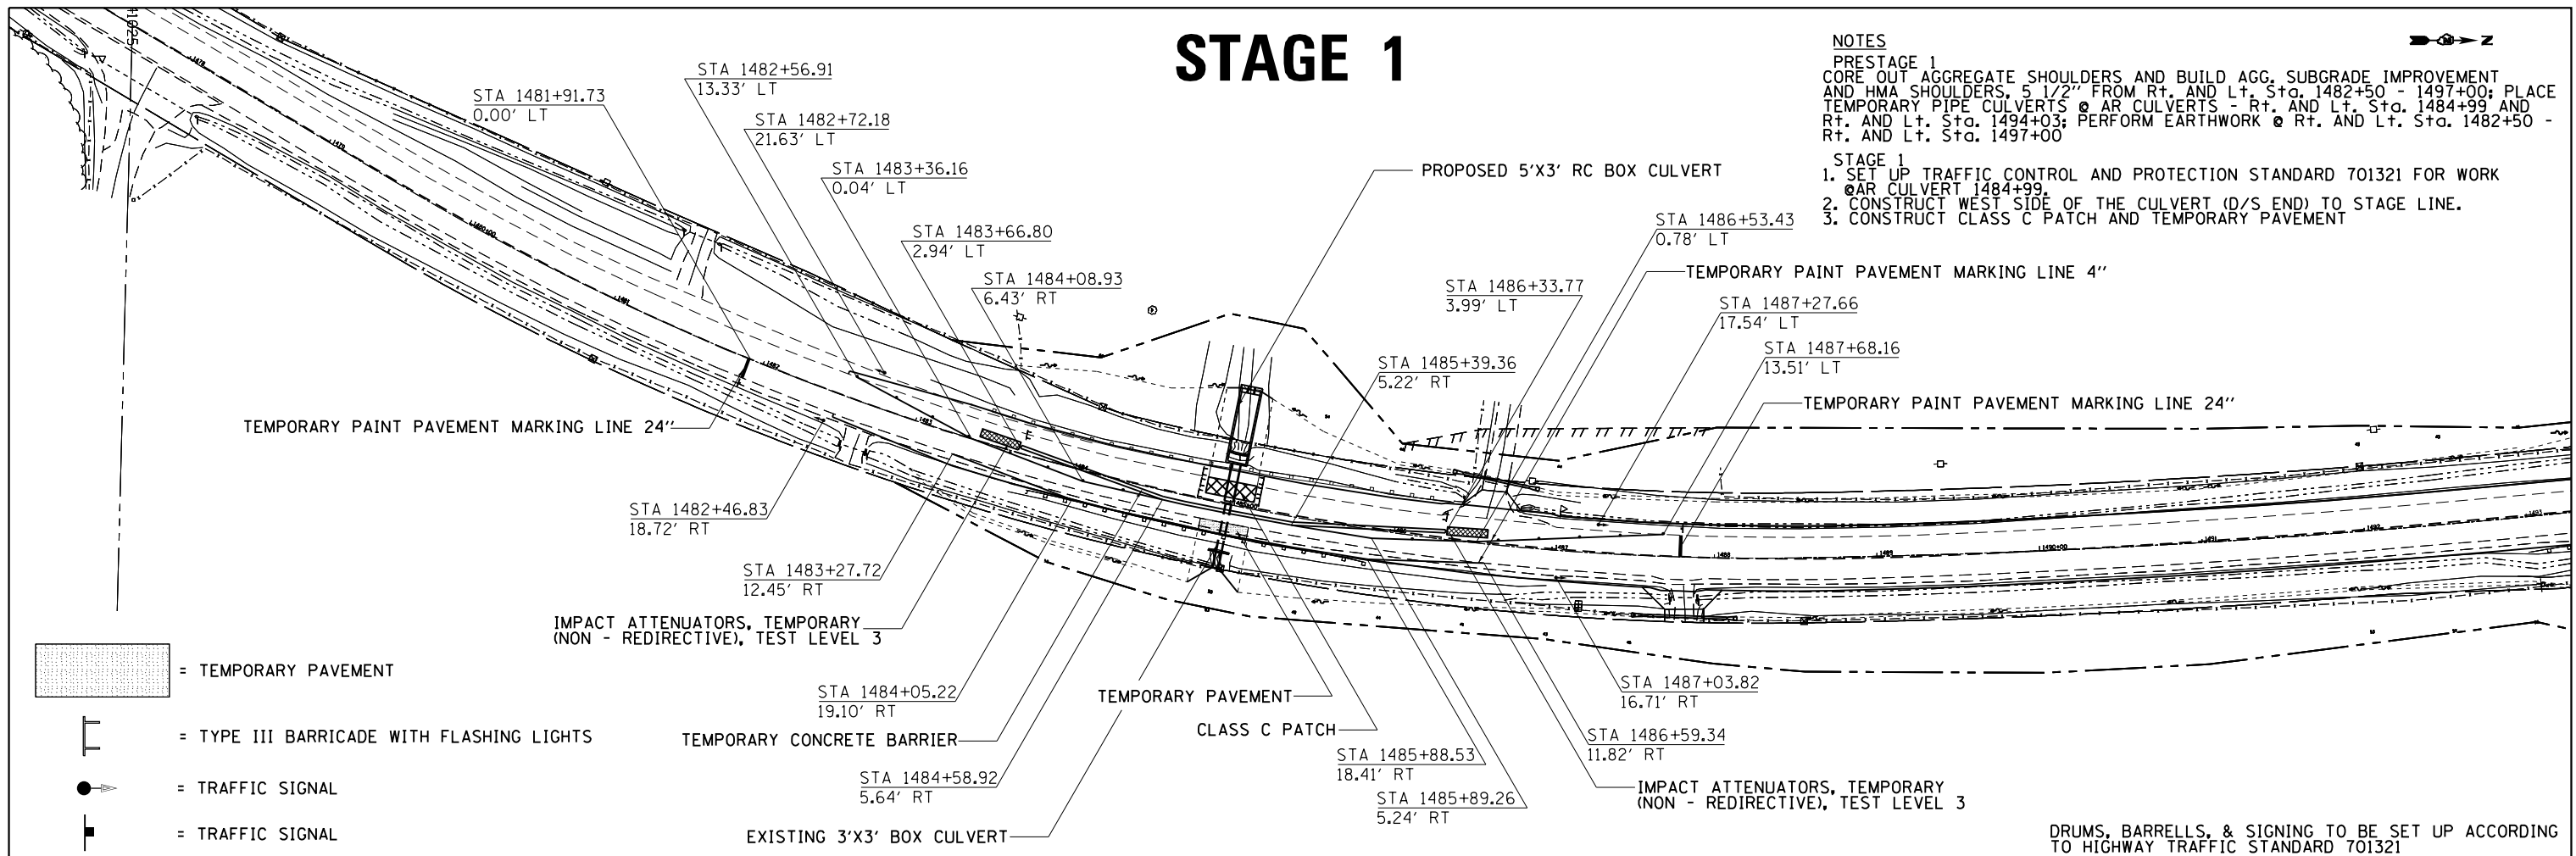


DRUMS, BARRELS, & SIGNING TO BE SET UP ACCORDING TO HIGHWAY TRAFFIC STANDARD 701321

STAGE 2

NOTES

- STAGE 2
1. REMOVE TRAFFIC CONTROL AND PROTECTION STANDARD 701321 FROM STAGE 1 CULVERT WORK.
 2. SET UP TRAFFIC CONTROL AND PROTECTION STANDARD 701321 FOR WORK @ AR CULVERT 1484+99.
 3. CONSTRUCT EAST SIDE OF THE CULVERT (U/S END) TO STAGE LINE. REMOVE TEMPORARY PAVEMENT
 4. CONSTRUCT CLASS C PATCH.

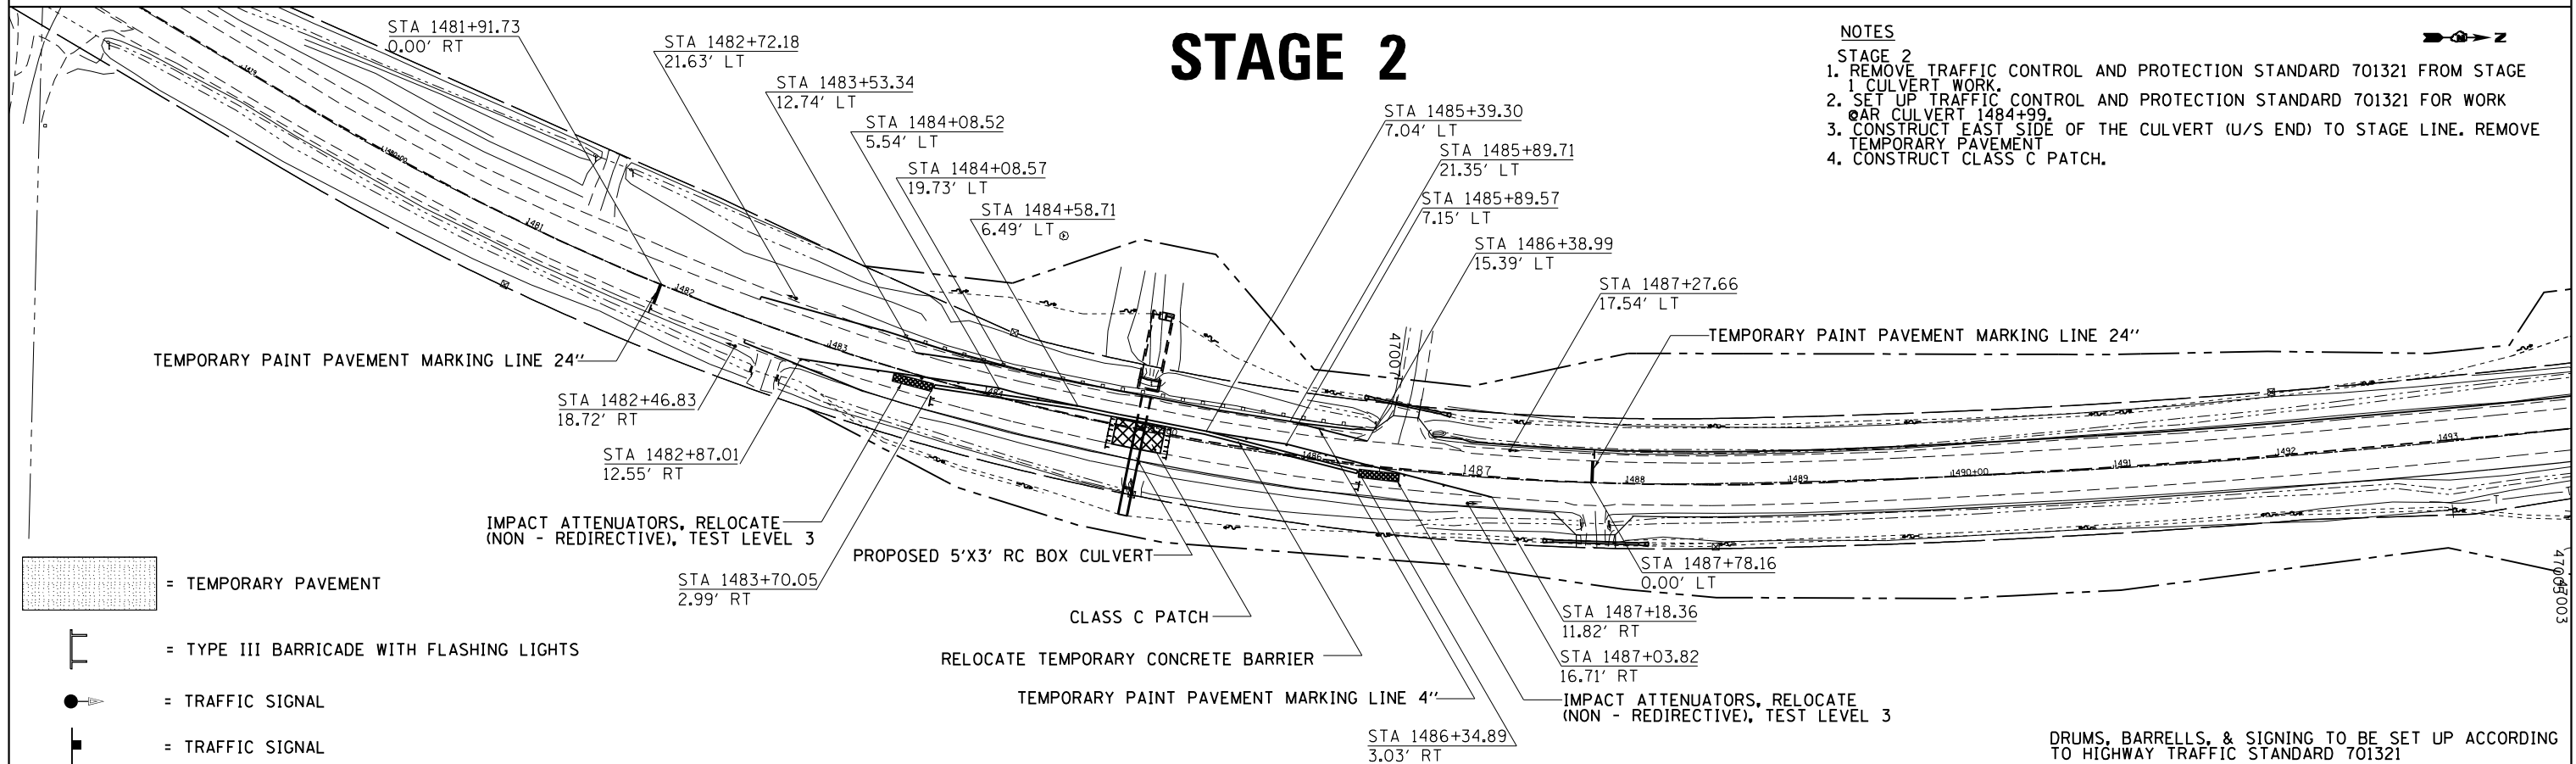

DRUMS, BARRELS, & SIGNING TO BE SET UP ACCORDING TO HIGHWAY TRAFFIC STANDARD 701321

FILE NAME =	USER NAME = dosddd	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGING DETAILS				F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
Default	0-sh1-staging.dgn	DRAWN -	REVISED -						570	101T	JO DAVISS	64	23
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -		CONTRACT NO. 64F75				ILLINOIS FED. AID PROJECT				
	PLOT DATE = Tue Jan 22 11:27:31 2013	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO	STA.		