SIGN PANEL 2
NB I-55 PAST ALIGNMENT LIMITS
MILE POST MARKER 209.3
STR IN MISSOURI

| SIGN NUMBER | Sign Panel 2 |
|---|---|
| WIDTH x HGHT. | 14'-6" x 16'-6" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: ZZ Retro-Reflective |
| | COLOR: Green |
| LEGEND/BORDER | TYPE: ZZ Retro-Reflective |
| | COLOR: White/White |

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| M1-I100 | 0 | 31 | 120 | 39.3 | 36 |

| LETTER POSITIONS (X) | | | | | | | | | | | | | | | LENGTH | SERIES/SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| E | X | I | T | 1 | | | | | | | | | | | | ClearviewHwy-5-W |
| 113.2 | 121.8 | 133.2 | 138.1 | 155.3 | | | | | | | | | | | 48.8 | 10,15 |
| S | O | U | T | H | | | | | | | | | | | | ClearviewHwy-5-W |
| 83.9 | 98.6 | 114 | 126.9 | 139.1 | | | | | | | | | | | 64.4 | 15,12 |
| E | | S | t | | L | o | u | i | s | | | | | | | ClearviewHwy-5-W |
| 20.6 | 30.8 | 47.7 | 62.8 | 70.6 | 88.3 | 102 | 119.7 | 136.3 | 144.5 | | | | | | 134 | 16/13 |
| C | a | h | o | k | i | a | | | | | | | | | | ClearviewHwy-5-W |
| 35.6 | 52.5 | 69.4 | 85.9 | 103.6 | 118.7 | 127.2 | | | | | | | | | 103.4 | 16/13 |
| 1 | 3 | t | h | | S | t | r | e | e | t | | | | | | ClearviewHwy-5-W |
| 13.3 | 25.4 | 40.5 | 53.1 | 64.2 | 81.9 | 96.9 | 109.5 | 120.8 | 137.4 | 152.9 | | | | | 147.5 | 16/13 |
| 1/2 | M | I | L | E | | | | | | | | | | | | ClearviewHwy-5-W |
| 54.6 | 85.9 | 99 | 105 | 114 | | | | | | | | | | | 65.8 | 15,10 |

SIGN PANEL 3
NB I-55 PAST ALIGNMENT LIMITS
MILE POST MARKER 209.3
STR IN MISSOURI

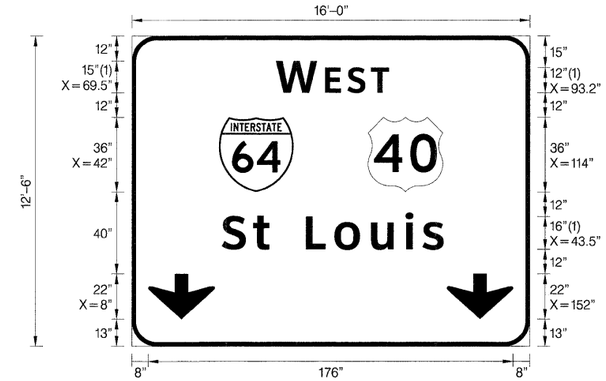


| SIGN NUMBER | Sign Panel 3 |
|---|---|
| WIDTH x HGHT. | 16'-0" x 12'-6" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: ZZ Retro-Reflective |
| | COLOR: Green |
| LEGEND/BORDER | TYPE: ZZ Retro-Reflective |
| | COLOR: White/White |

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| M1_1 | 0 | 42 | 75 | 36 | 36 |
| M1_4 | 0 | 114 | 75 | 36 | 36 |
| ARDOWN | 0 | 8 | 13.1 | 32 | 22 |
| ARDOWN | 0 | 152 | 13.1 | 32 | 22 |

| LETTER POSITIONS (X) | | | | | | | | | | | | | | | LENGTH | SERIES/SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | E | S | T | | | | | | | | | | | | | ClearviewHwy-5-W |
| 69.5 | 93.2 | 104 | 115.4 | | | | | | | | | | | | 54.5 | 15,12 |
| S | t | | L | o | u | i | s | | | | | | | | | ClearviewHwy-5-W |
| 43.5 | 58.5 | 66.4 | 84.1 | 97.7 | 115.5 | 132.1 | 140.2 | | | | | | | | 106.9 | 16/13 |

| | | | |
|---|---|---|---|
| FILE NAME = 08TRI-76C45-sht-signs-details.dgn | USER NAME = mmcconachie | DESIGNED - PMK | REVISED - |
| | | DRAWN - PMK | REVISED - |
| | PLOT SCALE = 3.0000 ' / in. | CHECKED - MPW | REVISED - |
| | PLOT DATE = 2/2/2012 | DATE - 2/2/2012 | REVISED - |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**SIGN PANEL DETAILS**

SCALE: N/A | SHEET NO. 2 OF 35 SHEETS | STA. N/A | TO STA. N/A

| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| • | 82-1SG | ST. CLAIR | 145 | 53 |
| •998/70/64 | | CONTRACT NO. 76C45 | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |