SIGN PANEL 7
NB I-55 PAST ALIGNMENT LIMITS
MILE POST MARKER 0.1
STR 8S082I055R000.1

| SIGN NUMBER | Sign Panel 7 |
|---|---|
| WIDTH x HGHT. | 14'-6" x 16'-6" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: ZZ Retro-Reflective |
| | COLOR: Green |
| LEGEND/BORDER | TYPE: ZZ Retro-Reflective |
| | COLOR: White/White |

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| M1-I100 | 0 | 31 | 120 | 39.3 | 36 |

| LETTER POSITIONS (X) | | | | | | | | | | | | | | | LENGTH | SERIES/SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| E | X | I | T | 1 | | | | | | | | | | | | ClearviewHwy-5-W |
| 113.2 | 121.8 | 133.2 | 138.1 | 155.3 | | | | | | | | | | | 48.8 | 10,15 |
| S | O | U | T | H | | | | | | | | | | | | ClearviewHwy-5-W |
| 83.9 | 98.6 | 114 | 126.9 | 139.1 | | | | | | | | | | | 64.4 | 15,12 |
| E | | S | t | | L | o | u | i | s | | | | | | | ClearviewHwy-5-W |
| 21.6 | 31.8 | 48.7 | 63.7 | 71.6 | 89.3 | 102.9 | 120.7 | 137.3 | 145.4 | | | | | | 134 | 16/13 |
| C | a | h | o | k | i | a | | | | | | | | | | ClearviewHwy-5-W |
| 36.6 | 53.4 | 70.4 | 86.8 | 104.6 | 119.7 | 128.2 | | | | | | | | | 103.4 | 16/13 |
| 1 | 3 | t | h | | S | t | r | e | e | t | | | | | | ClearviewHwy-5-W |
| 14.1 | 26.2 | 41.3 | 53.9 | 65 | 82.7 | 97.7 | 110.3 | 121.6 | 138.2 | 153.7 | | | | | 147.5 | 16/13 |
| 1/4 | M | I | L | E | | | | | | | | | | | | ClearviewHwy-5-W |
| 55.2 | 86.2 | 99.3 | 105.3 | 114.3 | | | | | | | | | | | 65.5 | 15,10 |

SIGN PANEL 8
NB I-55 PAST ALIGNMENT LIMITS
MILE POST MARKER 0.1
STR 8S082I055R000.1

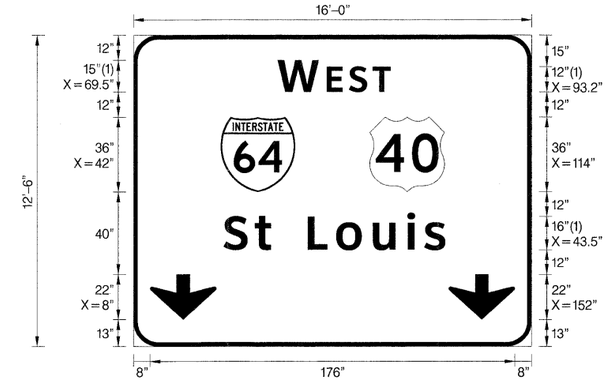


| SIGN NUMBER | Sign Panel 8 |
|---|---|
| WIDTH x HGHT. | 16'-0" x 12'-6" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: ZZ Retro-Reflective |
| | COLOR: Green |
| LEGEND/BORDER | TYPE: ZZ Retro-Reflective |
| | COLOR: White/White |

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| M1_1 | 0 | 42 | 75 | 36 | 36 |
| M1_4 | 0 | 114 | 75 | 36 | 36 |
| ARDOWN | 0 | 8 | 13 | 32 | 22 |
| ARDOWN | 0 | 152 | 13 | 32 | 22 |

| LETTER POSITIONS (X) | | | | | | | | | | | | | | | LENGTH | SERIES/SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | E | S | T | | | | | | | | | | | | | ClearviewHwy-5-W |
| 69.5 | 93.2 | 104 | 115.4 | | | | | | | | | | | | 54.5 | 15,12 |
| S | t | | L | o | u | i | s | | | | | | | | | ClearviewHwy-5-W |
| 43.5 | 58.5 | 66.4 | 84.1 | 97.7 | 115.5 | 132.1 | 140.2 | | | | | | | | 106.9 | 16/13 |

| FILE NAME = | USER NAME = mmcconachie | DESIGNED - PMK | REVISED - |
|---|---|---|---|
| D8TRI-76C45-sht-signs-details.dgn | | DRAWN - PMK | REVISED - |
| | PLOT SCALE = 3.0000 ' / in. | CHECKED - MPW | REVISED - |
| | PLOT DATE = 2/2/2012 | DATE - 2/2/2012 | REVISED - |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**SIGN PANEL DETAILS**

SCALE: N/A | SHEET NO. 5 OF 35 SHEETS | STA. N/A | TO STA. N/A

| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| • | 82-1SG | ST. CLAIR | 145 | 56 |
| •998/70/64 | | CONTRACT NO. 76C45 | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |