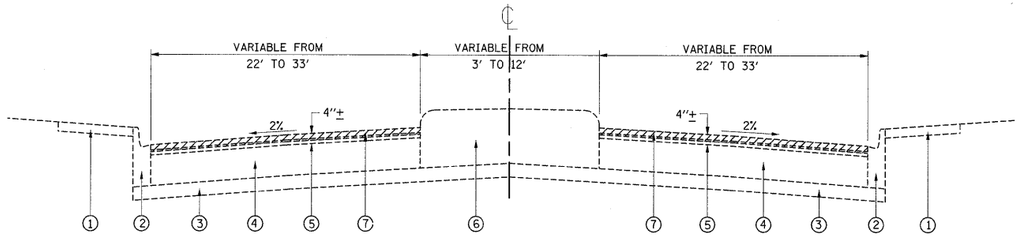

EXISTING TYPICAL SECTION
25th AVENUE
STATION:
15+15 TO 21+30
22+42 TO 25+00
25+47 TO 27+05
65+20 TO 68+78

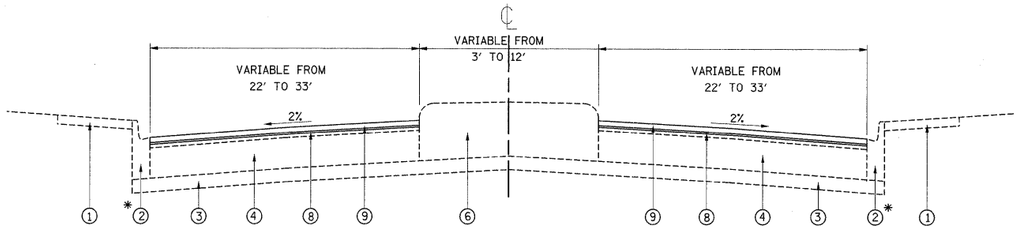

PROPOSED TYPICAL SECTION
25th AVENUE
STATION:
15+15 TO 21+30
22+42 TO 25+00
25+47 TO 27+05
65+20 TO 68+78

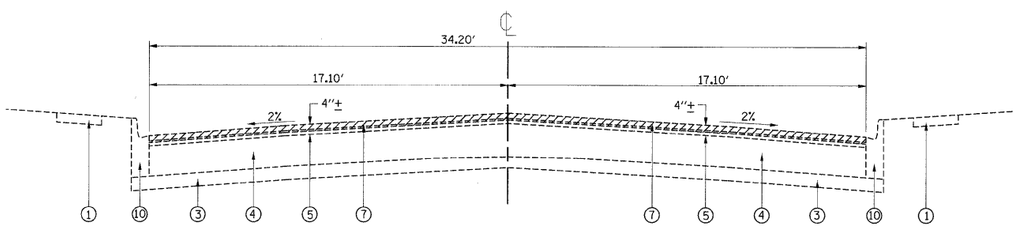

EXISTING TYPICAL SECTION
25th AVENUE
STATION:
29+25 TO 64+69

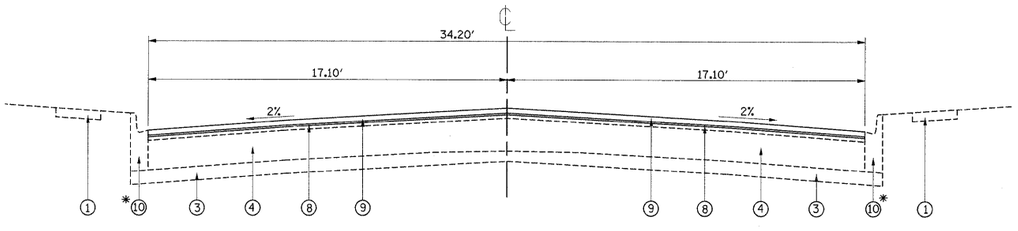

PROPOSED TYPICAL SECTION
25th AVENUE
STATION:
29+25 TO 64+69

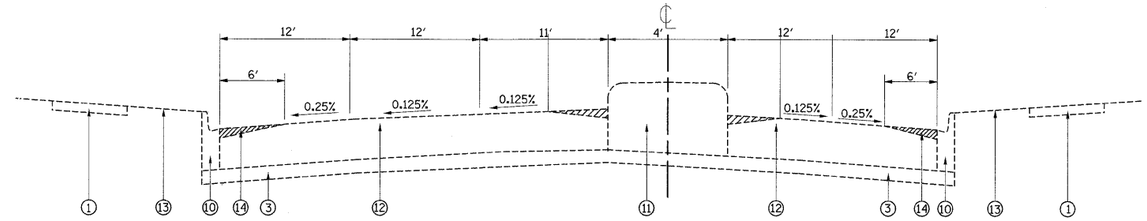

EXISTING TYPICAL SECTION
25th AVENUE
STATION:
70+32 TO 72+79

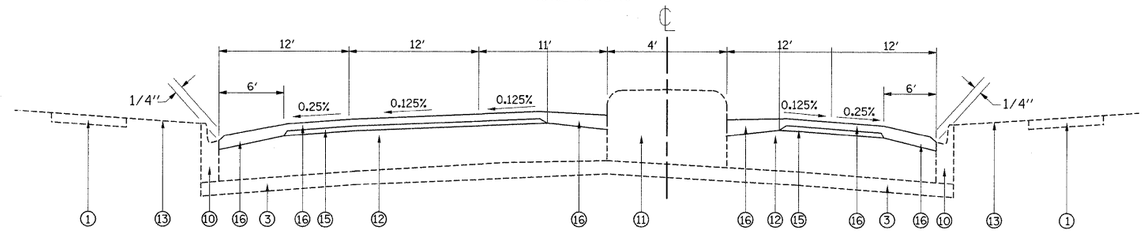

PROPOSED TYPICAL SECTION
25th AVENUE
STATION:
70+32 TO 72+79

LEGEND

1. EXIST. PCC SIDEWALK, 4"
2. EXIST. CONCRETE CURB AND GUTTER, B-6.24
3. EXIST. SUB-BASE GRANULAR MATERIAL, TYPE B
4. EXIST. PCC BASE COURSE, 4" - 12"
5. ** EXIST. BITUMINOUS CONCRETE BINDER AND SURFACE COURSE 4 1/2"
6. EXIST. CORRUGATED PORTLAND CEMENT CONCRETE MEDIAN
7. PROP. BITUMINOUS CONCRETE SURFACE REMOVAL - 2 1/2"
8. PROP. POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL.-4.75, N50, 3/4"
9. PROP. HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 1 3/4"
10. EXIST. CONCRETE CURB AND GUTTER, B-6.12
11. EXIST. CONCRETE CURB TYPE B
12. EXIST. PORTLAND CEMENT CONCRETE PAVEMENT, 10"
13. EXIST. GROUND
14. PROP. PORTLAND CEMENT CONCRETE SURFACE REMOVAL (VAR. DEPTH) IN SQUARE YARD
15. PROP. POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 1"
16. PROP. POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 1/2"
17. EXIST. RETAINING WALL AND FOOTING
18. EXIST. PARKING
19. PROP. POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4"

NOTE: * COMBINATION CONCRETE CURB & GUTTER TO BE REMOVE AND REPLACE PER PLAN AND FIELD INSPECTION
** CONTRACTOR IS TO MILL FIRST BEFORE PATCHING

FILE NAME = c:\pw_work\PWIDOT\KANTHAPHIXAYRR\d0136122\25th-Design.dgn	USER NAME = kanthaphixayrr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	25th AVENUE EXISTING AND PROPOSED TYPICAL SECTIONS				F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						2714	1010.2.RS	COOK	24	4
	PLOT SCALE = 50.0000 ' / IN.	CHECKED -	REVISED -								CONTRACT NO. 60B51		
	PLOT DATE = 4/20/2009	DATE -	REVISED -		SCALE: NONE	SHEET NO.	OF	SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT