


STAGE II CONSTRUCTION

(Looking South)

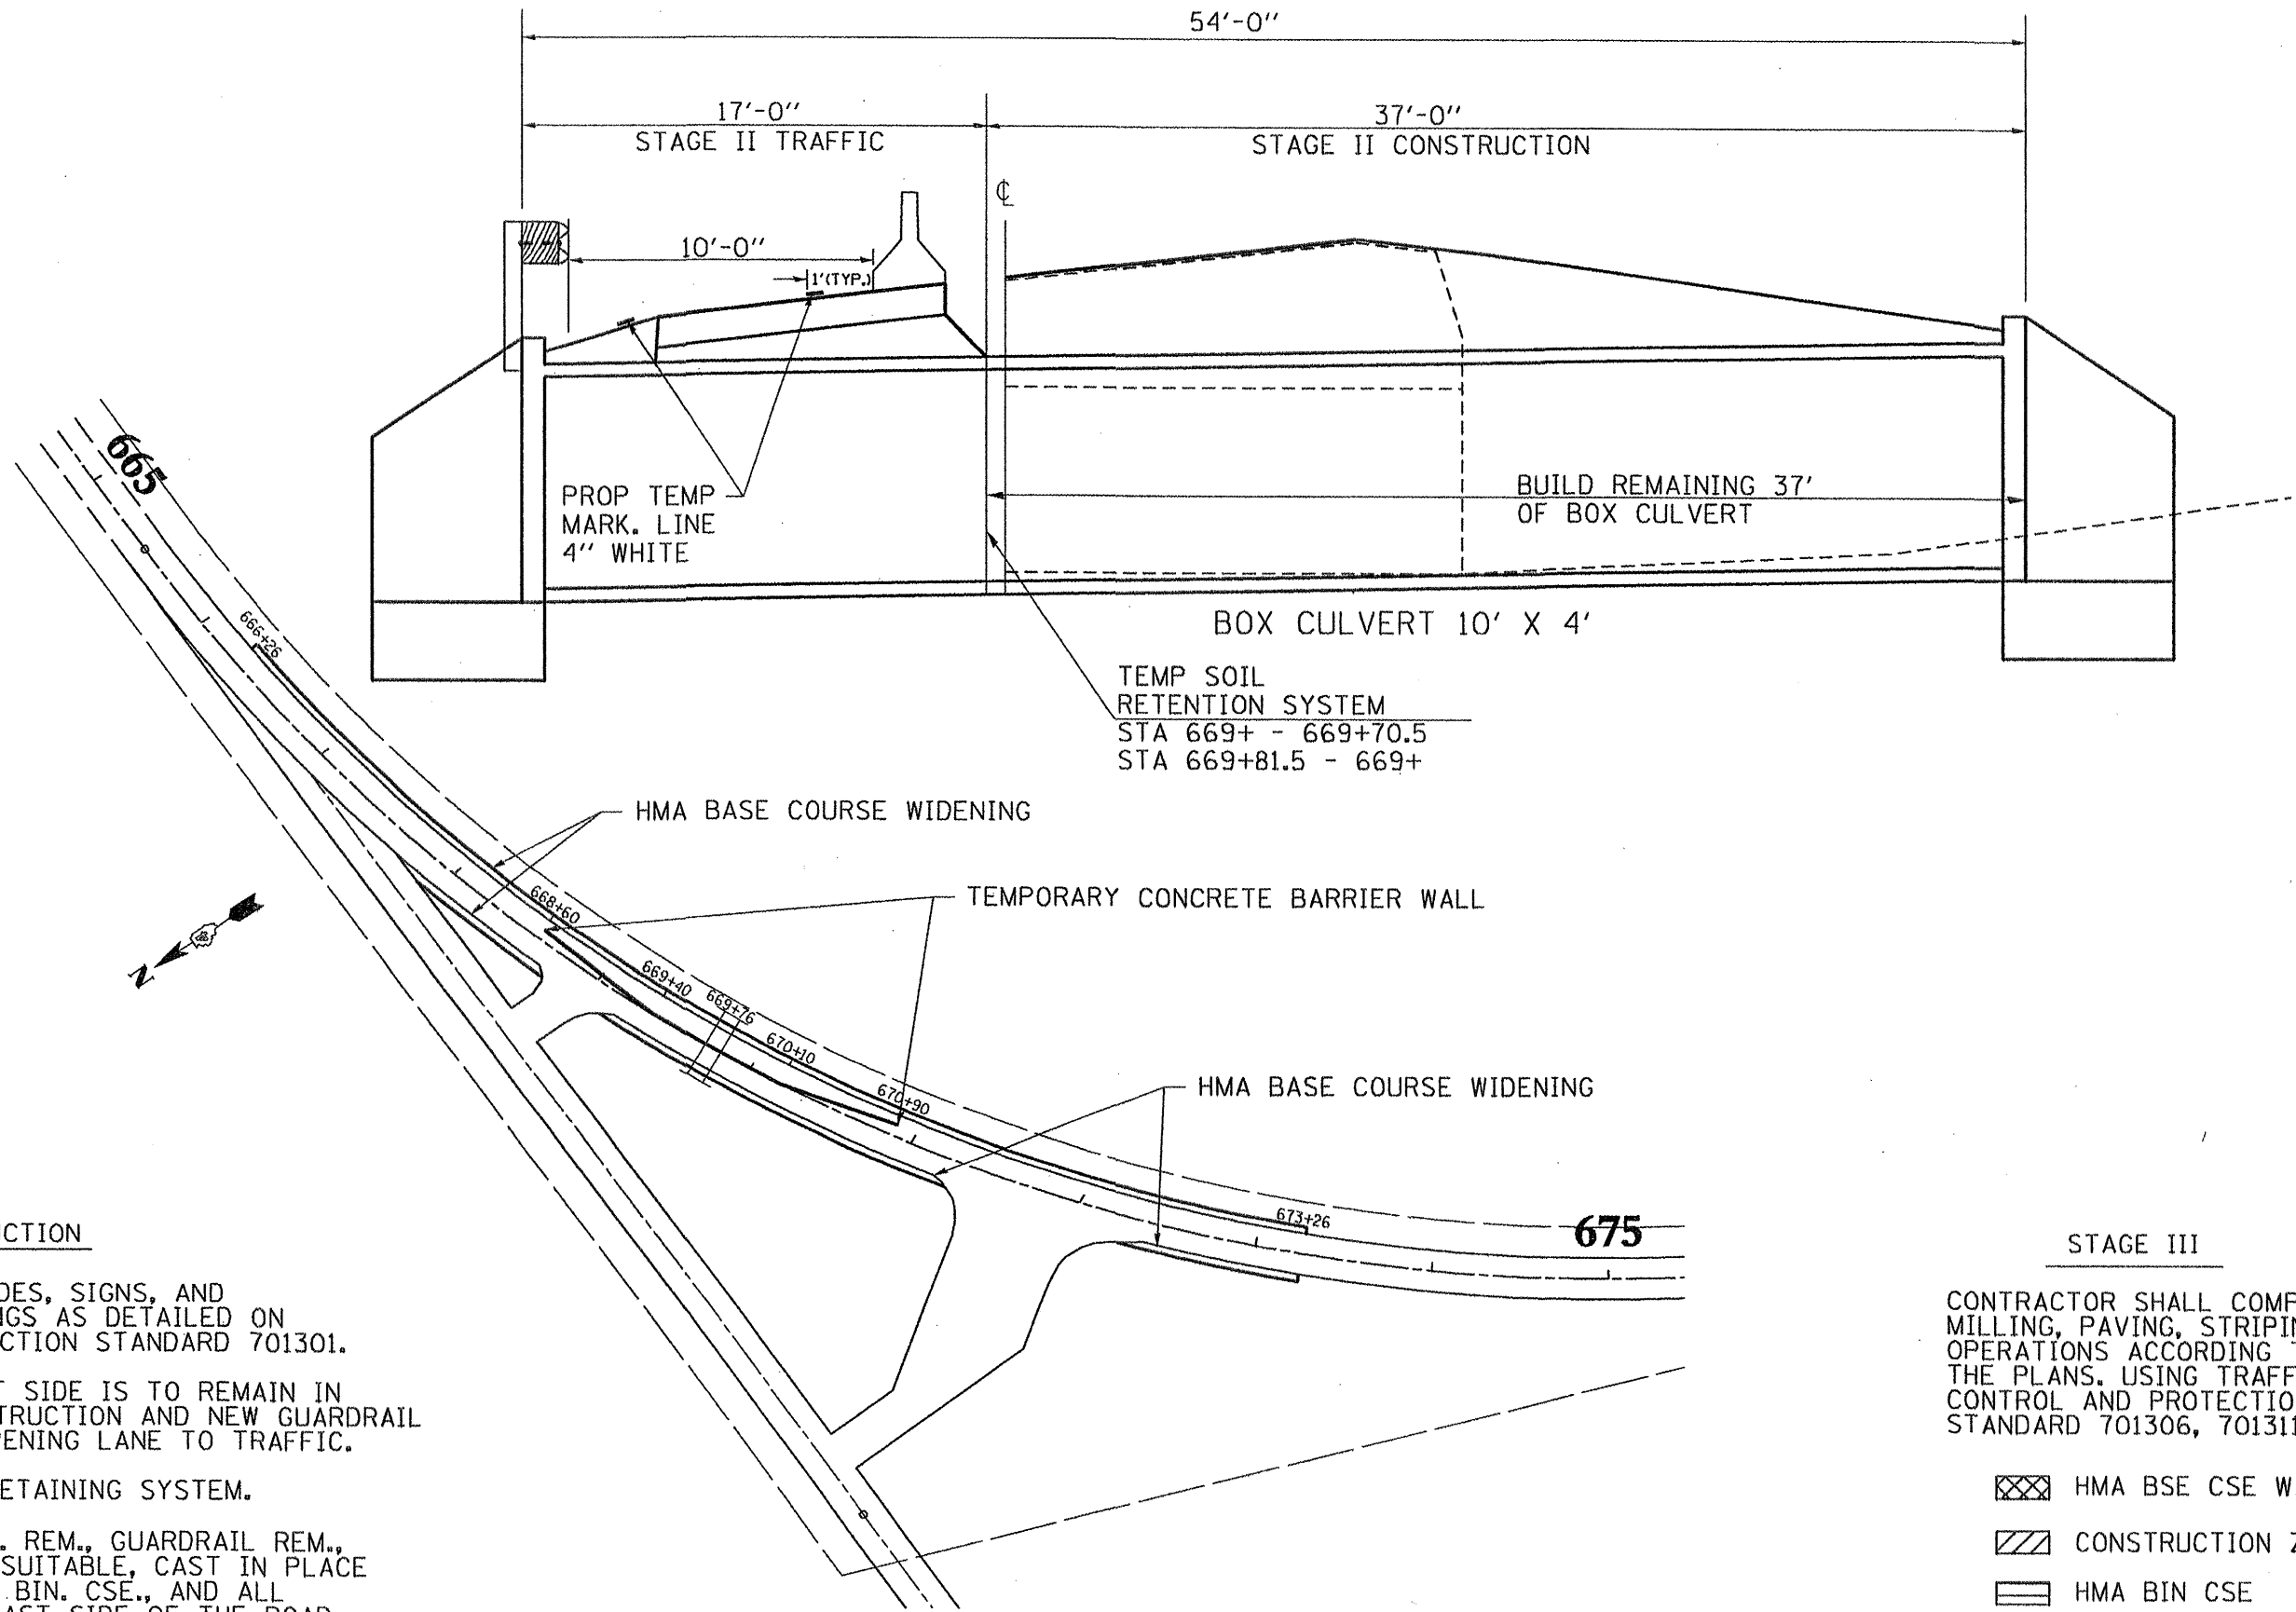

STAGE II CONSTRUCTION

INSTALL TEMPORARY BARRICADES, SIGNS, AND TEMPORARY PAVEMENT MARKINGS AS DETAILED ON TRAFFIC CONTROL AND PROTECTION STANDARD 701301.

EXISTING GUARDRAIL ON WEST SIDE IS TO REMAIN IN PLACE DURING STAGE I CONSTRUCTION AND NEW GUARDRAIL MUST BE ERECTED BEFORE OPENING LANE TO TRAFFIC.

INSTALL TEMPORARY EARTH RETAINING SYSTEM.

PERFORM WORK SUCH AS; PAV. REM., GUARDRAIL REM., STRUCTURE REM., REM. OF UNSUITABLE, CAST IN PLACE BOX CULVERT, BACKFILL, HMA BIN. CSE., AND ALL COLLATERAL WORK FOR THE EAST SIDE OF THE ROAD.

STAGE III

CONTRACTOR SHALL COMPLETE MILLING, PAVING, STRIPING OPERATIONS ACCORDING TO THE PLANS. USING TRAFFIC CONTROL AND PROTECTION STANDARD 701306, 701311.

- HMA BSE CSE WID
- CONSTRUCTION ZONE
- HMA BIN CSE

FILE NAME = 68406 sheets.dgn	USER NAME = kslmarkk	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGING PLANS STAGE II CONSTRUCTION	F.A.P. RTE. 685/618	SECTION 36(RS-1)(C-2)	COUNTY MCDONOUGH	TOTAL SHEETS 52	SHEET NO. 22
		DRAWN -	REVISED -							
		PLOT SCALE = 100.0000' / IN.	CHECKED -							
		PLOT DATE = 4/22/2009	DATE -							
						NOT TO SCALE	SHEET NO. 2 OF 2 SHEETS	STA. 669+76	CONTRACT NO. 68406	
ILLINOIS FED. AID PROJECT										