

3/13/2008 2:09:36 PM  
q:\17049\069\Track & Rail Main Contract\FINAL PLANS\stg01.dgn


**LEGEND**

- ||| EXISTING TRACK
- EXISTING CATENARY POLE
- ◆ PROPOSED TEMPORARY/PERMANENT CATENARY POLE

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
F.A.P. 351	2008-001VB	COOK	579	192
STA.		TO STA.		
FED. ROAD DIST. NO. 7		ILLINOIS		FED. AID PROJECT
CONTRACT NO. 60E10				

**CURVE DATA  
CN GATEWAY LEAD TRACK SHIFT**

P.I. STA. 1795+01.92  
 N99948.03, E98844.23  
 $\Delta = 16^\circ 38' 16''$  (LT)  
 $D = 2^\circ 43' 00''$   
 $T = 308.42'$   
 $R = 2,109.24'$   
 $L = 612.43'$   
 $E = 22.43'$   
 $S.E. = 1/2''$   
 $S.L. = 31'$   
 T.S. STA. 1791+62.50  
 S.C. STA. 1791+93.50  
 C.S. STA. 1798+05.93  
 S.T. STA. 1798+36.93

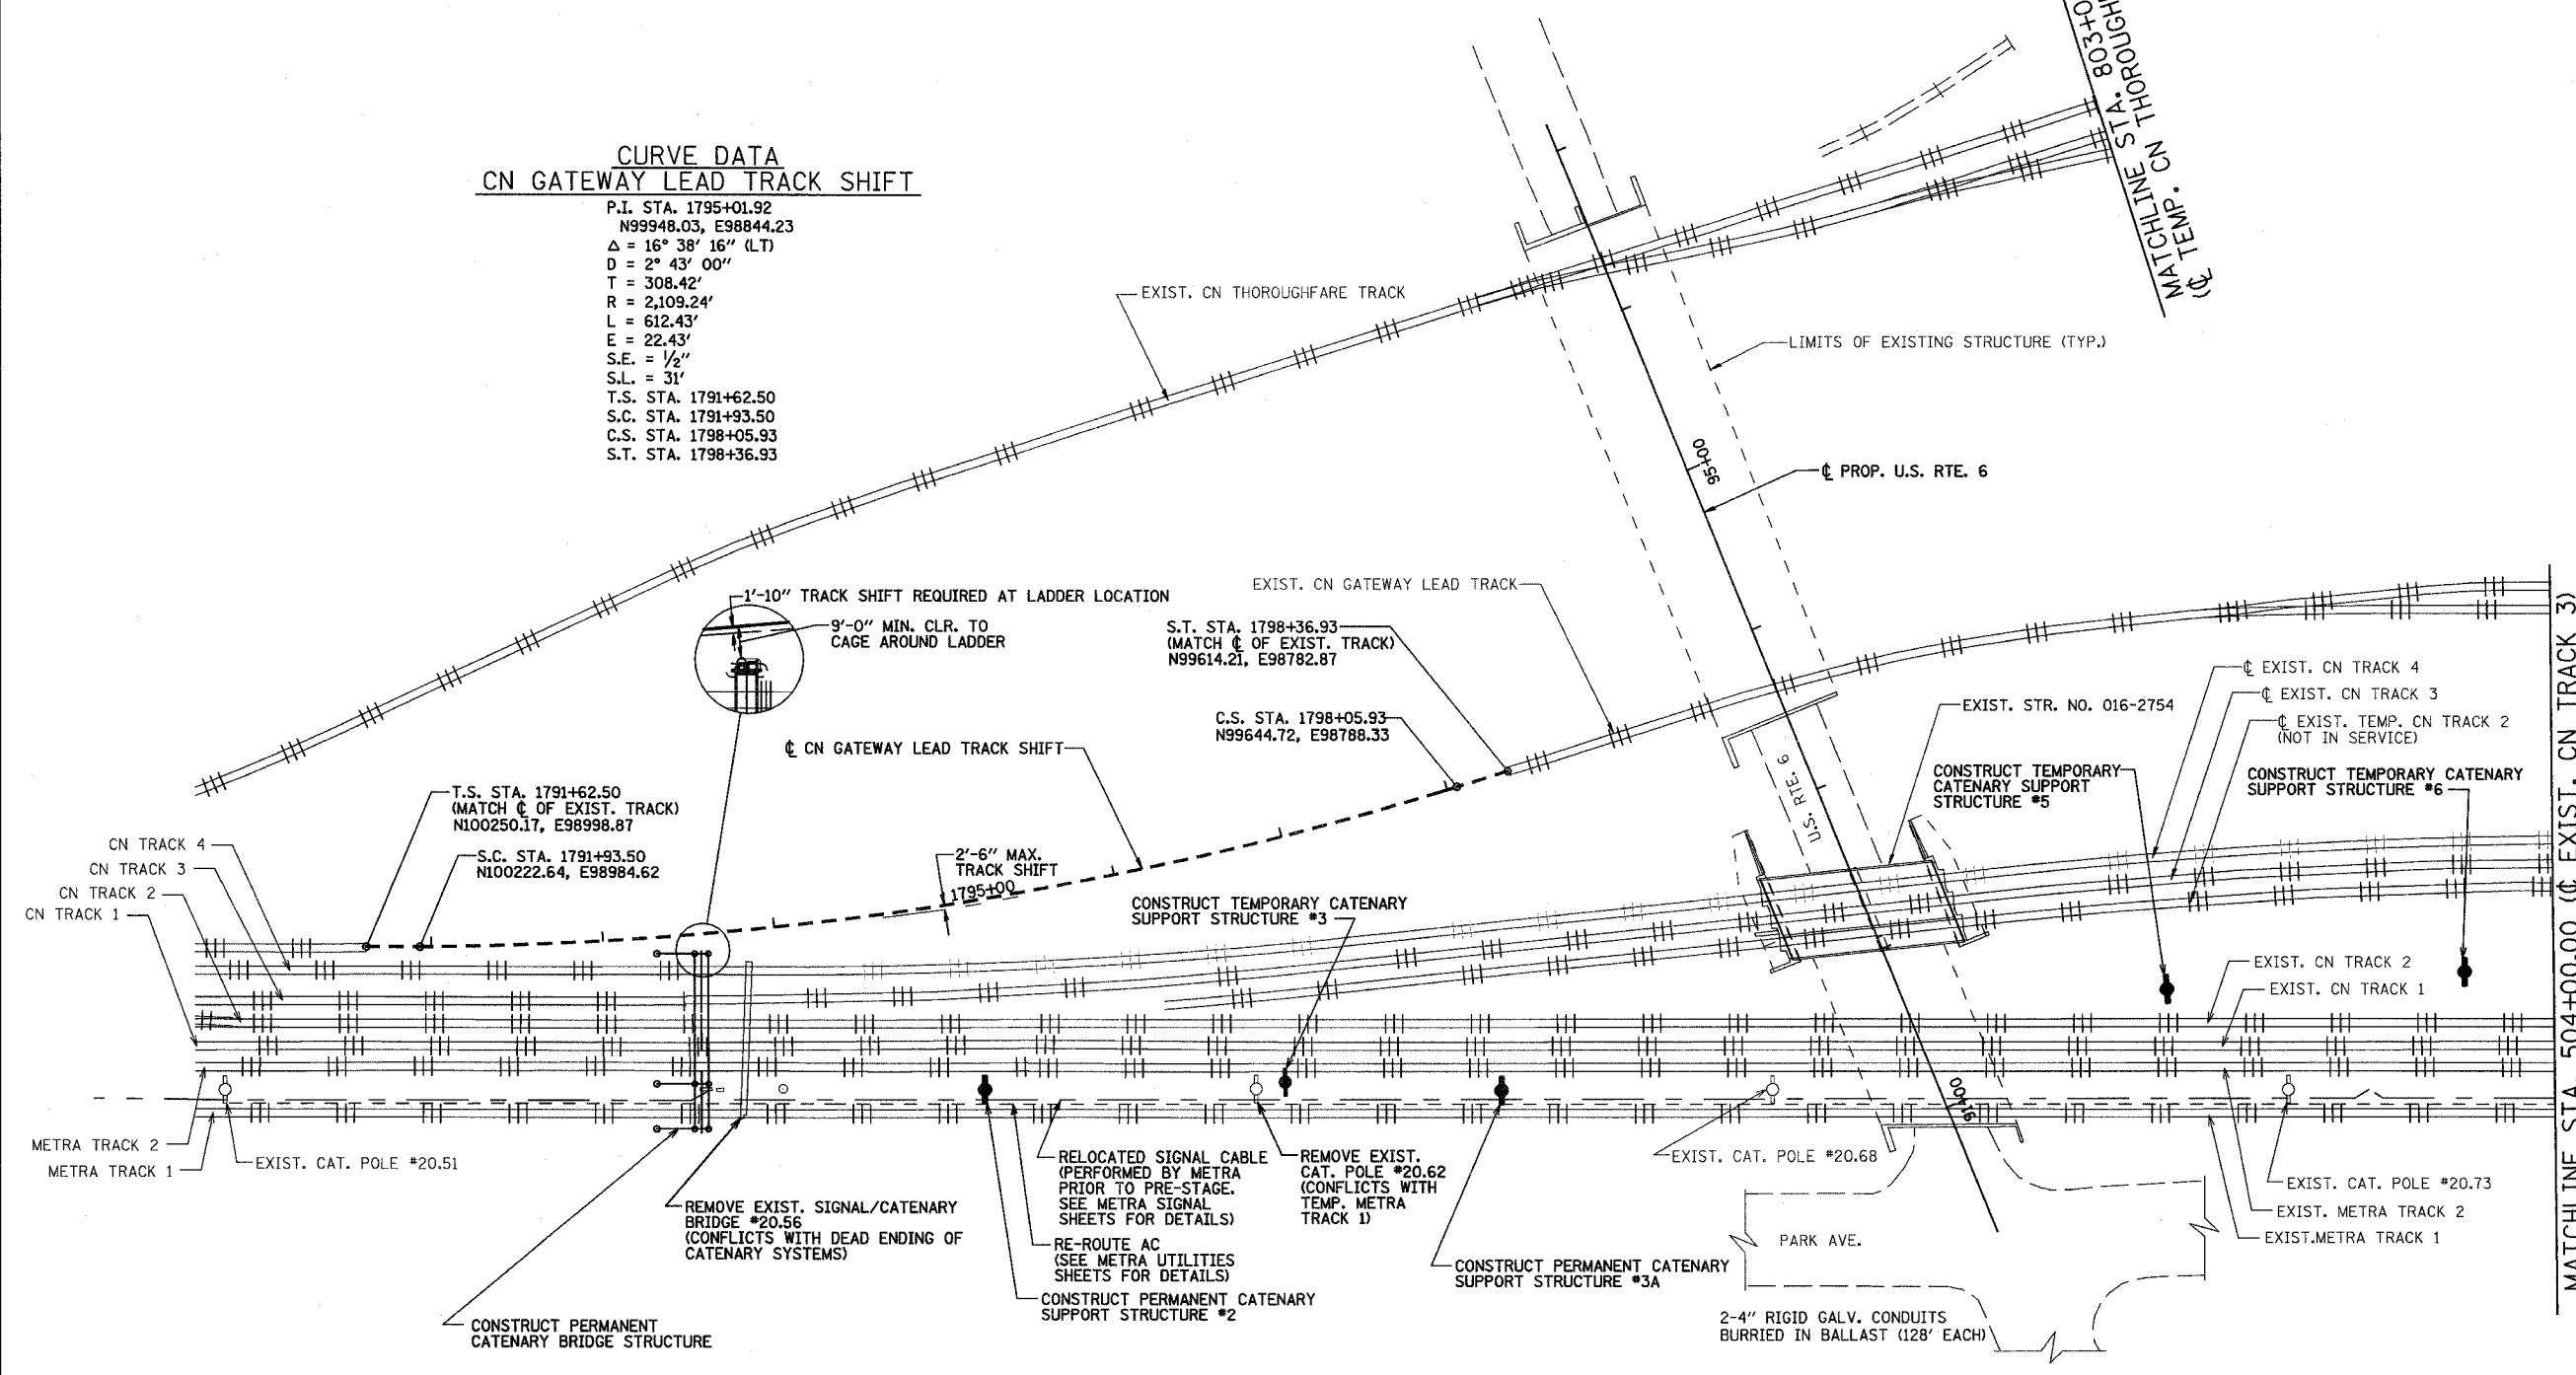

**PRE-STAGE**

- NOTES:
- FOR PRE-STAGE SUGGESTED TRACK CONSTRUCTION TASKS & SEQUENCING SEE SHEET 20.
  - EXISTING CN TRACKS 1 & 2 SHALL NOT BE CROSSED DURING CONSTRUCTION OF PRE-STAGE WORK.

**PRE-STAGE WORK SUMMARY**

SHIFT GATEWAY LEAD TRACK
CONSTRUCT CATENARY DEAD END STRUCTURES
CONSTRUCT CATENARY SUPPORT STRUCTURES #1, #2, #3, #3A, #5, #6, #7, #9A, #10 & #11
REMOVE EXISTING CATENARY SIGNAL BRIDGE 20.56
REMOVE EXISTING CATENARY POLES 20.62 & 20.90

REVISIONS	
NAME	DATE
REZ	10/19/07

ILLINOIS DEPARTMENT OF TRANSPORTATION  
 US RTE 6 FROM I-294 TO IL RTE 1  
 METRA & CN OVER 159TH STREET

**TRACK CONSTRUCTION  
PRE-STAGE - CATENARY RELATED**

SHT. 18 OF 88  
 DATE 2/21/2008

DRAWN BY REZ  
 CHECKED BY RMS

