CONTRACT #72679

FAU ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
8071	*	SANGAMON	425	233
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

(84-9) RS-6; (G)Z *

SIGN DETAIL
1:30

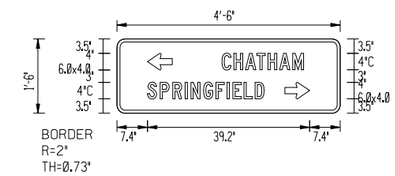

SIGN NUMBER	Signdet019
WIDTH x HGHT.	4'-6" x 1'-6"
BORDER WIDTH	0.73"
CORNER RADIUS	2"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White /Pure White

SYMBOL	X	Y	WID	HT
ABUP	7.4	10.5	4	6
ABUP	40.6	3.5	4	6

Panel Style:Award Signs.sxl
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																						LENGTH	SERIES-SIZE
C	H	A	T	H	A	M																	C4
25.4	28.8	31.1	33.8	36.5	39.4	42.5																19.7	
S	P	R	I	N	G	F	I	E	L	D													C4
7.4	10.4	13.5	16.5	17.9	20.9	24	26.6	28	30.7	33.4												39.2	

SN-126

SIGN DETAIL



SIGN NUMBER	name
WIDTH x HGHT.	4'-6" x 2'-0"
BORDER WIDTH	0.75"
CORNER RADIUS	2.25"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White /White

SYMBOL	X	Y	WID	HT

Panel Style:Mast Arm.sxl
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																						LENGTH	SERIES-SIZE
C	E	N	T	R	E																		D8
7.6	14.5	20.9	27.8	34.2	41.5																	38.7	
S	T	R	E	E	T																		D4
17.8	21	24.2	27.9	31	34																	18.9	

SN-125

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
GUIDANCE SIGN DETAILS - 6
SECTION
(84-9) RS-6; (G)Z
SANGAMON COUNTY, ILLINOIS

SCALE: VERT. HORIZ.
DATE Mar-20-2008 09:39:39AM
DRAWN BY
CHECKED BY

LAYOUT	CLG	09/17/07
DRAWN	CLG	09/17/07
REVIEWED	JWM	09/17/07

Mar-20-2008 09:39:39AM
$FILE$

© Copyright Hanson Professional Services Inc. MS_YEAR

HANSON