NOTES:

SECTION CORNERS SHALL BE SET IN ACCORDANCE SPECIAL PROVISION.

BASIS OF COORDINATES - ILLINOIS STATE PLANE, WEST ZONE, GRID COORDINATES
COORDINATE TYPE: GRID
ELLIPSOID: WGS 84
STATE PLANE ZONE: ILLINOIS WEST NAD 83 ('07)
GEOID MODEL: GEOID 09
AVERAGE COMBINED FACTOR: 1.0000020211

**CONTROL POINT COORDINATE TABLE**

| POINT NO. | NORTH | EAST | DESCRIPTION |
|---|---|---|---|
| CP 100 | 604,676.508 | 2,565,702.619 | IRON PIN W/ ALUMINUM CAP |
| CP 101 | 598,243.776 | 2,565,692.205 | IRON PIN W/ ALUMINUM CAP |
| CP 102 | 592,188.534 | 2,565,592.299 | IRON PIN W/ ALUMINUM CAP |
| CP 103 | 586,709.765 | 2,565,506.092 | IRON PIN W/ ALUMINUM CAP |
| CP 104 | 583,043.588 | 2,565,456.839 | IRON PIN W/ ALUMINUM CAP |
| CP 105 | 578,234.407 | 2,565,377.837 | IRON PIN W/ ALUMINUM CAP |
| CP 106 | 574,242.756 | 2,565,419.426 | IRON PIN W/ ALUMINUM CAP |
| CP 107 | 568,912.162 | 2,565,383.861 | IRON PIN W/ ALUMINUM CAP |
| CP 108 | 564,777.897 | 2,565,373.418 | IRON PIN W/ ALUMINUM CAP |

**SECTION CORNER COORDINATE TABLE**

| POINT NO. | NORTH | EAST | DESCRIPTION | CORNER |
|---|---|---|---|---|
| SC 1 (1002) | 604,853.410 | 2,565,735.490 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 29-2-1 |
| SC 2 (1003) | 602,189.707 | 2,565,737.784 | RR SPIKE | N. 1/4 Cor Sec 32-2-1 |
| SC 3 (1004) | 599,532.040 | 2,565,684.752 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 32-2-1 |
| SC 4 (1006) | 596,870.758 | 2,565,631.633 | IRON PIN W/ ALUMINUM CAP | N. 1/4 Cor Sec 5-3-1 |
| SC 5 (1010) | 594,374.333 | 2,565,668.104 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 5-3-1 |
| SC 6 (1014) | 591,796.802 | 2,565,602.127 | IRON PIN W/ ALUMINUM CAP | N. 1/4 Cor Sec 8-3-1 |
| SC 7 (1018) | 589,051.142 | 2,565,554.198 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 8-3-1 |
| SC 8 (1021) | 586,370.747 | 2,565,539.900 | IRON PIN W/ ALUMINUM CAP | N. 1/4 Cor Sec 17-3-1 |
| SC 9 (1040) | 583,661.533 | 2,565,499.787 | IRON PIN | Ctr. of Sec 17-3-1 |
| SC 10 (1025) | 580,968.501 | 2,565,474.661 | IRON PIN W/ ALUMINUM CAP | N. 1/4 Cor Sec 20-3-1 |
| SC 11 (1027) | 578,268.113 | 2,565,422.465 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 20-3-1 |
| SC 12 (1030) | 575,574.281 | 2,565,384.763 | IRON PIN W/ ALUMINUM CAP | N. 1/4 Cor Sec 29-3-1 |
| SC 13 (1032) | 572,897.433 | 2,565,399.512 | IRON PIN W/ ALUMINUM CAP | Ctr. of Sec 29-3-1 |
| SC 14 (1033) | 567,499.993 | 2,565,409.725 | IRON PIN | Ctr. of Sec 32-3-1 |
| SC 15 (1035) | 564,816.227 | 2,565,409.988 | MAGNAIL | S. 1/4 Cor Sec 32-3-1 |

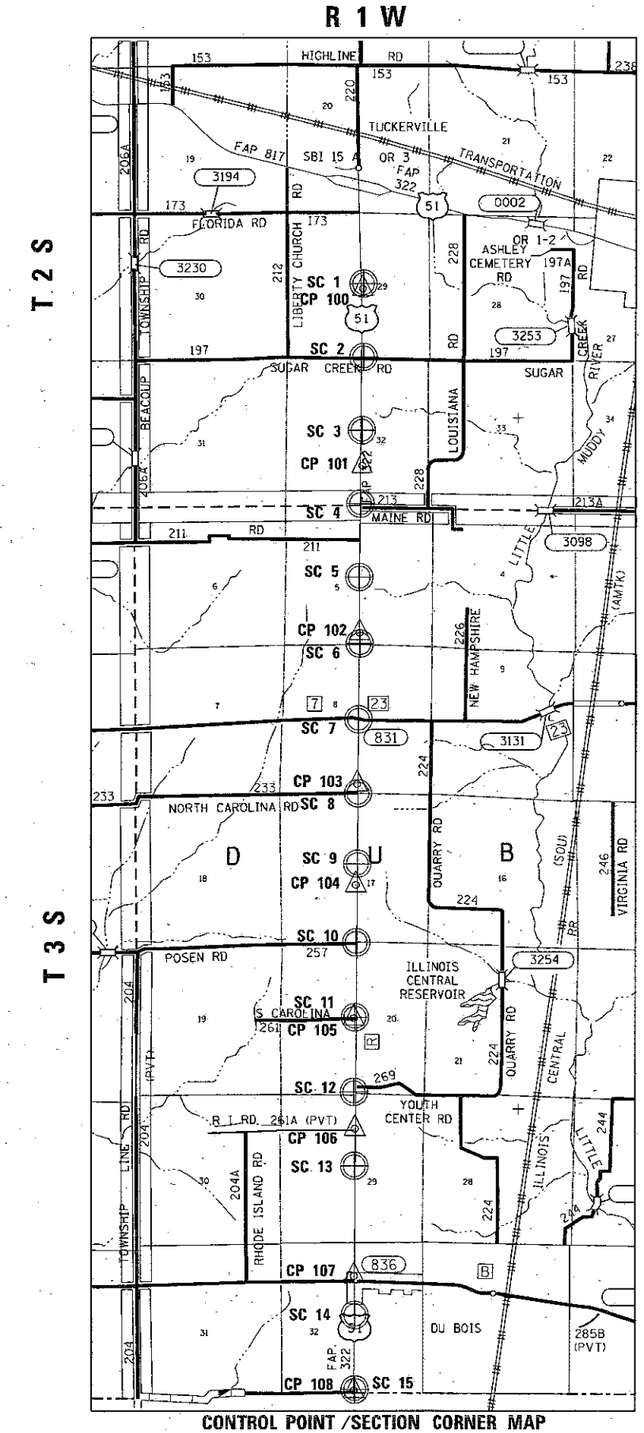


**CONTROL POINT /SECTION CORNER MAP**
**NOT TO SCALE**

Foth
Foth Infrastructure & Environment, LLC

| | | | |
|---|---|---|---|
| USER NAME = jlf1 | DESIGNED - IDOT D8 | REVISED - | |
| PRINTER = | DRAWN - IDOT D8 | REVISED - | |
| PLOT SCALE = 100.0000 ' / in. | CHECKED - IDOT D8 | REVISED - | |
| PLOT DATE = 1/12/2012 | DATE - 01/13/2012 | REVISED - | |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**SURVEY MONUMENTS**

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 322 | (7, 8)RS-2 | WASHINGTON | 15 | 14 |

CONTRACT NO. 76E91

ILLINOIS FED. AID PROJECT

DRIVER = lib$entley$1\print\plotd=-VILDOT\ILDOT_pdf.bwp1cfg
FILE NAME = X:\CHANGE\2011\11024-01\CAD\Plans\11024-01-sht-ts1.dgn