CONTRACT NO. 98963

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57/64	(41-3)HBK	JEFFERSON	518	250
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

SIGN NO. 17
STA 789+15 LT ℄ I57/I64
PLACE ON EXISTING TRUSS

9.0" Radius, 2.0" Border, White on Green;
"EXIT" E Mod 2K; "95" E Mod 2K;
9.0" Radius, 2.0" Border, White on Green;
"Mt Vernon" E Mod 2K; "Ashley" E Mod 2K;
Table of letter and object lefts.

E 107.8	X 116.5	I 127.4	T 131.1	9 153.5	5 168.9	
⊡ 60.6	95 156.3					
M 14.0	t 32.5	V 56.9	e 74.0	r 89.5	n 101.4	o 116.9	n 132.8
A 35.5	s 53.8	h 69.3	l 86.3	e 94.4	y 108.1	

SIGN NO. 18
STA 789+15 LT ℄ I57/I64
PLACE ON EXISTING TRUSS

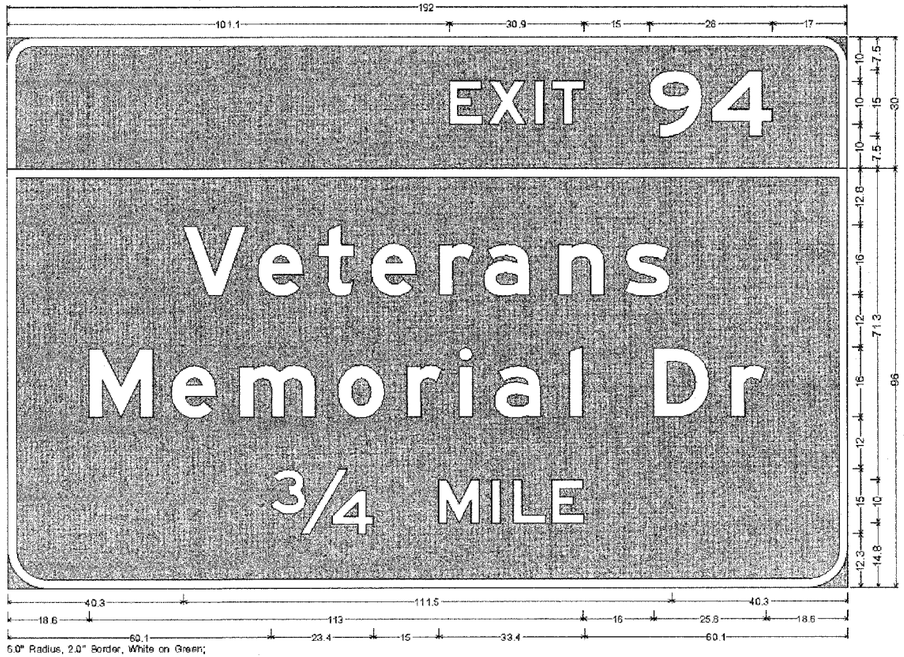

6.0" Radius, 2.0" Border, White on Green;
"EXIT" E Mod 2K; "94" E Mod 2K;
9.0" Radius, 2.0" Border, White on Green;
"Veterans" E Mod 2K; "Memorial Dr" E Mod 2K; "¾" E Mod 2K; "MILE" E Mod 2K;
Table of letter and object lefts.

E 101.1	X 110.0	I 120.8	T 124.5	9 147.0	4 161.0		
V 40.3	e 57.4	t 71.1	e 83.1	r 98.6	a 109.0	n 126.0	s 141.3
M 18.6	e 37.5	m 53.0	o 75.6	r 91.5	i 103.3	a 111.5	l 128.4	D 147.8	r 165.4
¾ 60.1	M 98.5	I 110.6	L 115.4	E 124.4			

PLOT DATE = 03\21\2007, 10:05 AM
FILE NAME = I:\98jobs\98s2019a\IDOT RAMPS\d983506sgn.dgn
PLOT SCALE = 50.0000 ' / IN.
USER NAME = Ket