


PLAN VIEW

MEDIAN DETAIL

NOTE:

1. REMOVAL OF TEMPORARY PAVEMENT SHALL BE PAID FOR AS PAVEMENT REMOVAL.
2. FURNISHED MATERIAL TO BACK FILL BETWEEN THE BACKS OF PROPOSED CURBS UP TO THE BOTTOM OF THE PROPOSED TOPSOIL WILL BE INCLUDED IN THE COST OF PAVEMENT REMOVAL.
3. CA-6 AGGREGATE AS NECESSARY TO BACK FILL UNDER THE PROPOSED CONCRETE MEDIAN, TYPE SB-6.12 SHALL BE INCLUDED IN THE COST OF THE PROPOSED CONCRETE MEDIAN.

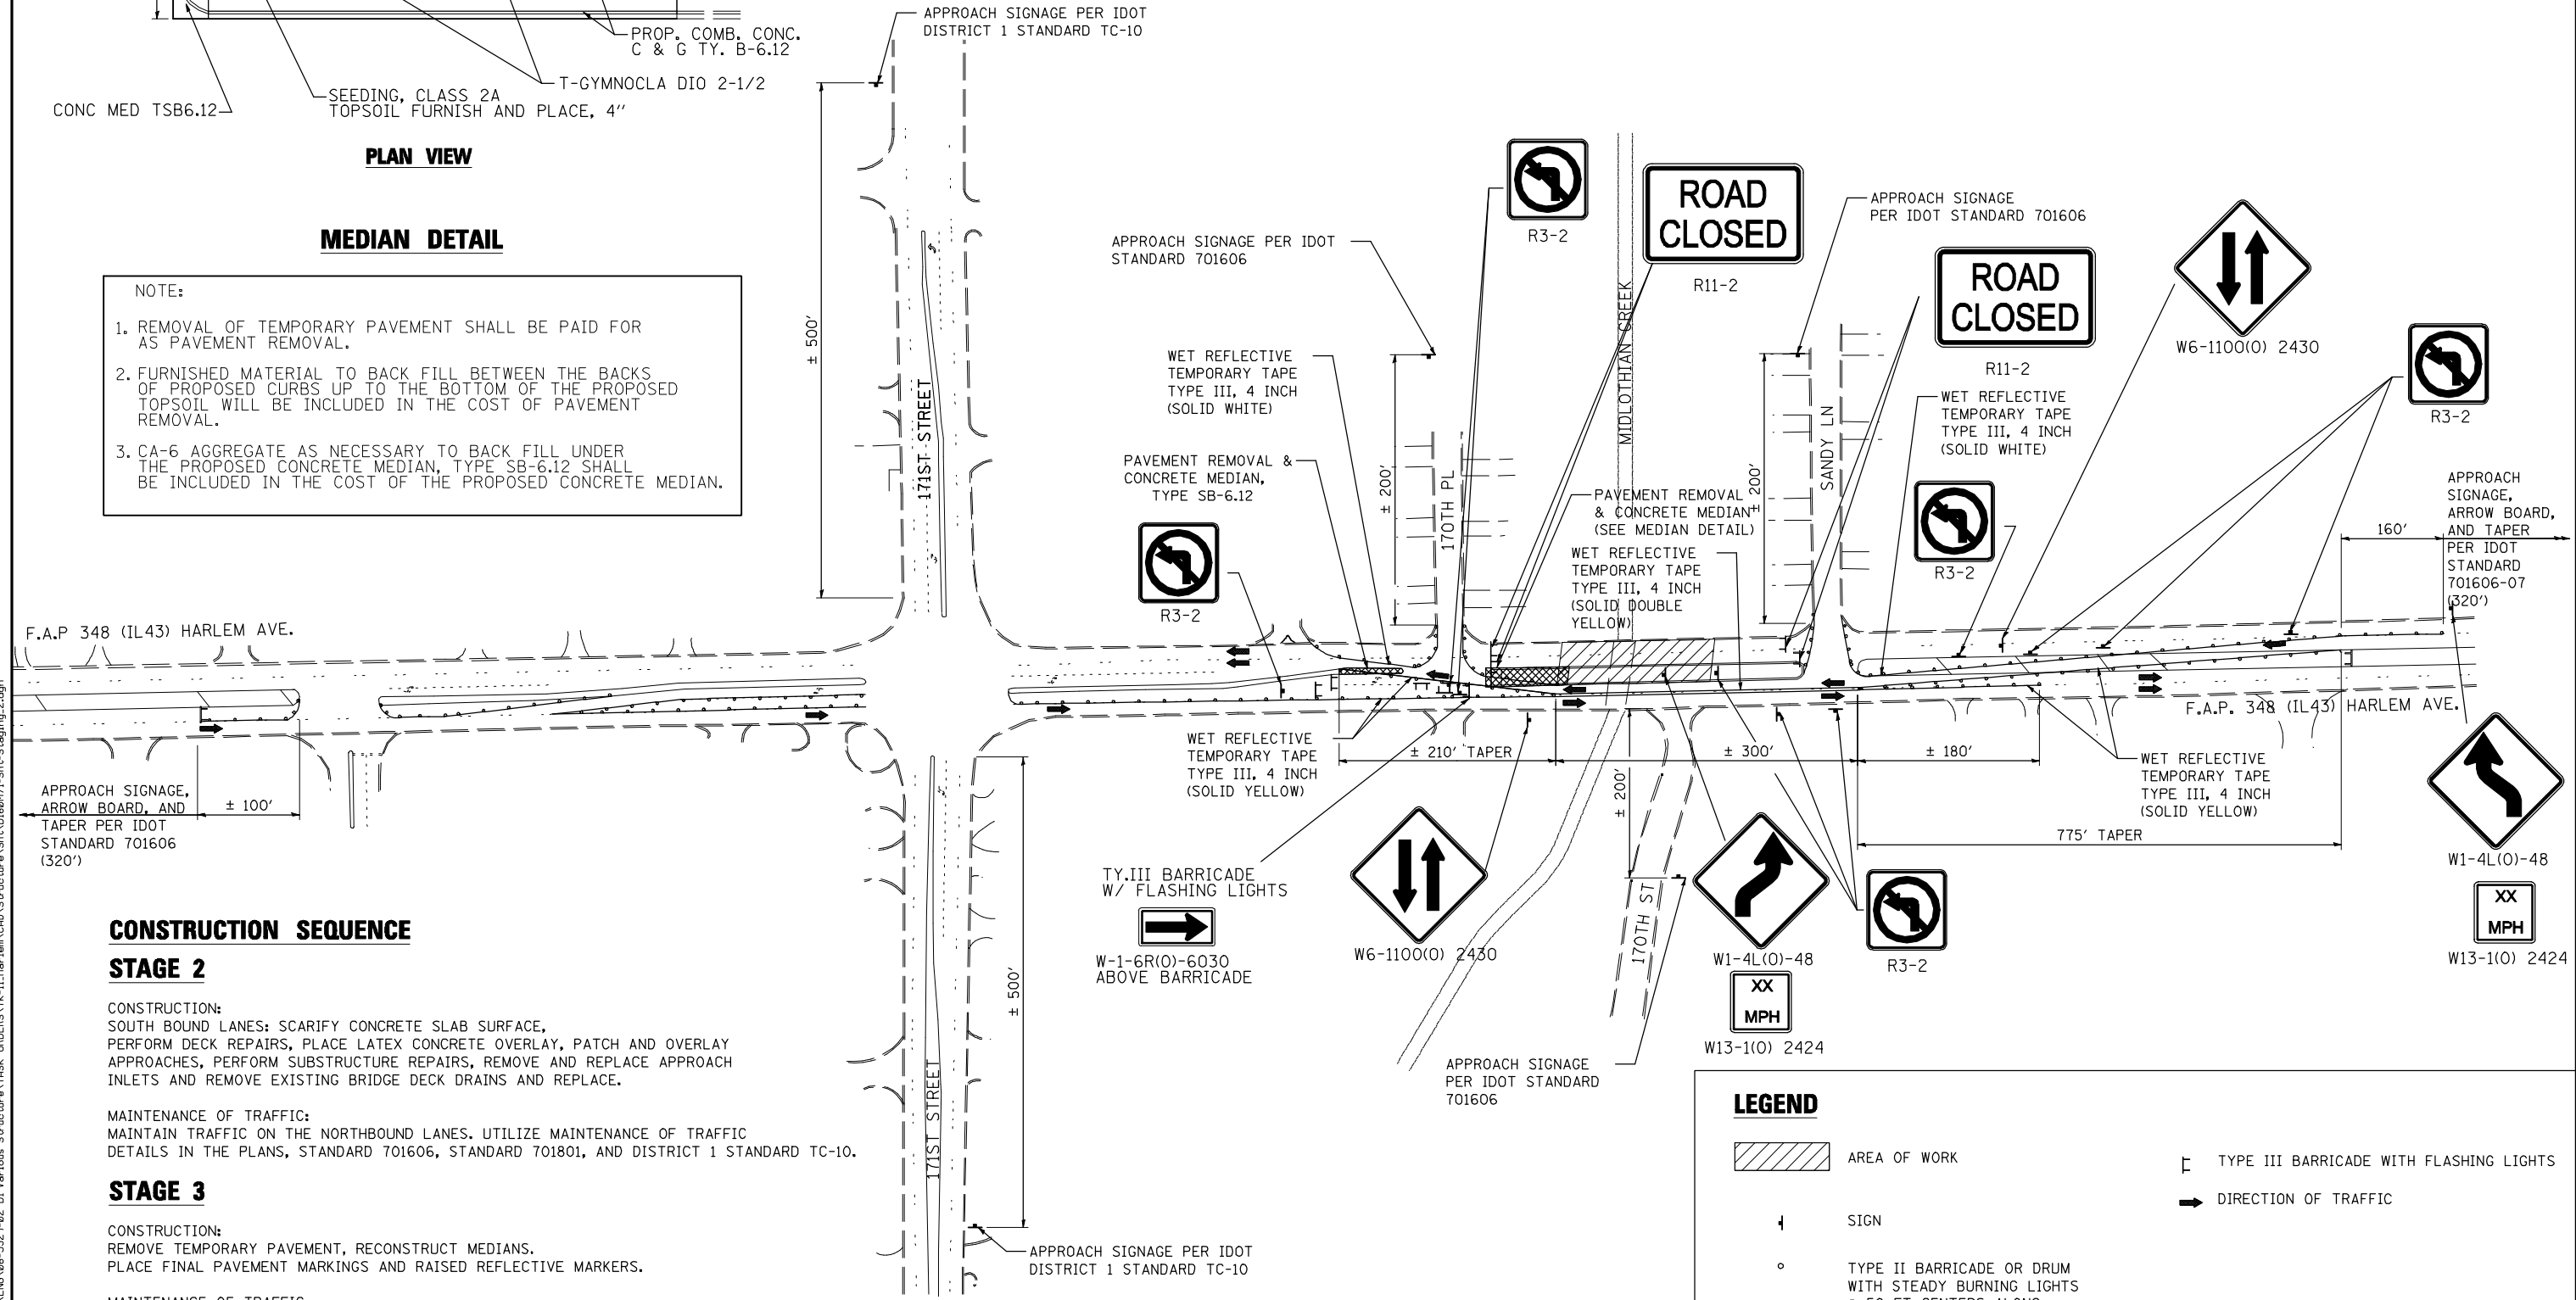

CONSTRUCTION SEQUENCE

STAGE 2

CONSTRUCTION:
SOUTH BOUND LANES: SCARIFY CONCRETE SLAB SURFACE, PERFORM DECK REPAIRS, PLACE LATEX CONCRETE OVERLAY, PATCH AND OVERLAY APPROACHES, PERFORM SUBSTRUCTURE REPAIRS, REMOVE AND REPLACE APPROACH INLETS AND REMOVE EXISTING BRIDGE DECK DRAINS AND REPLACE.

MAINTENANCE OF TRAFFIC:
MAINTAIN TRAFFIC ON THE NORTHBOUND LANES. UTILIZE MAINTENANCE OF TRAFFIC DETAILS IN THE PLANS, STANDARD 701606, STANDARD 701801, AND DISTRICT 1 STANDARD TC-10.

STAGE 3

CONSTRUCTION:
REMOVE TEMPORARY PAVEMENT, RECONSTRUCT MEDIANS. PLACE FINAL PAVEMENT MARKINGS AND RAISED REFLECTIVE MARKERS.

MAINTENANCE OF TRAFFIC:
UTILIZE STANDARD 701606 AND 701311

LEGEND

- AREA OF WORK
- DIRECTION OF TRAFFIC
- TYPE III BARRICADE WITH FLASHING LIGHTS
- TYPE II BARRICADE OR DRUM WITH STEADY BURNING LIGHTS @ 50 FT CENTERS ALONG ROADWAY (TANGENT) AND 20 FT CENTERS ALONG TAPERS

3/27/2012 1:39:17 PM G:\ENR\06-5324-02 D1 Varios Structure\Task Orders\TK-IL-Harlem\CAD\Structure\Shd\160M71-Shd-Staging-2.dgn



USER NAME =	DESIGNED - TP	REVISED -
	CHECKED - KAC	REVISED -
PLOT SCALE = N.T.S.	DRAWN - CEY	REVISED -
PLOT DATE = 3/27/2012	CHECKED - KAC	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**MAINTENANCE OF TRAFFIC - STAGE 2
IL ROUTE 43 (HARLEM AVE)**

SHEET NO. 1 OF 1 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
348	3127-2-SB-1	COOK	19	6
CONTRACT NO. 60M71				
ILLINOIS FED. AID PROJECT				