PART OF THE S. 1/2 OF SEC. 16 AND PART OF THE N. 1/2 OF SEC. 21, TWP. 43 N., R. 10 E. OF THE 3RD. P.M., IN LAKE COUNTY, ILLINOIS.

PARCEL NUMBER	OWNER	TOTAL HOLDINGS ACRES	PART TAKEN ACRES	PART TAKEN SQUARE FEET	AREA IN EXISTING R.O.W. ACRES	REMAINDER AREA ACRES	EASEMENT AREA ACRES	EASEMENT AREA SQUARE FEET	EASEMENT PURPOSE	PERMANENT INDEX NUMBER	PROPERTY ACQUIRED BY
1EB0007 1EB0007T.E.	Eddie Bailey and Teresa Bailey in joint tenancy	0.254	0.005	209	N/A	0.249	0.008	339	Driveway Construction	14-21-101-047	
1EB0008 1EB0008T.E.	Harris Bank Barrington, N.A., as Trustee under the provisions of a Trust Agreement, dated the 4th day of April, 1998 and known as Trust Number 11-5449	1.000	0.249	N/A	0.151	0.751	0.006	264	Driveway Construction	14-21-200-001	

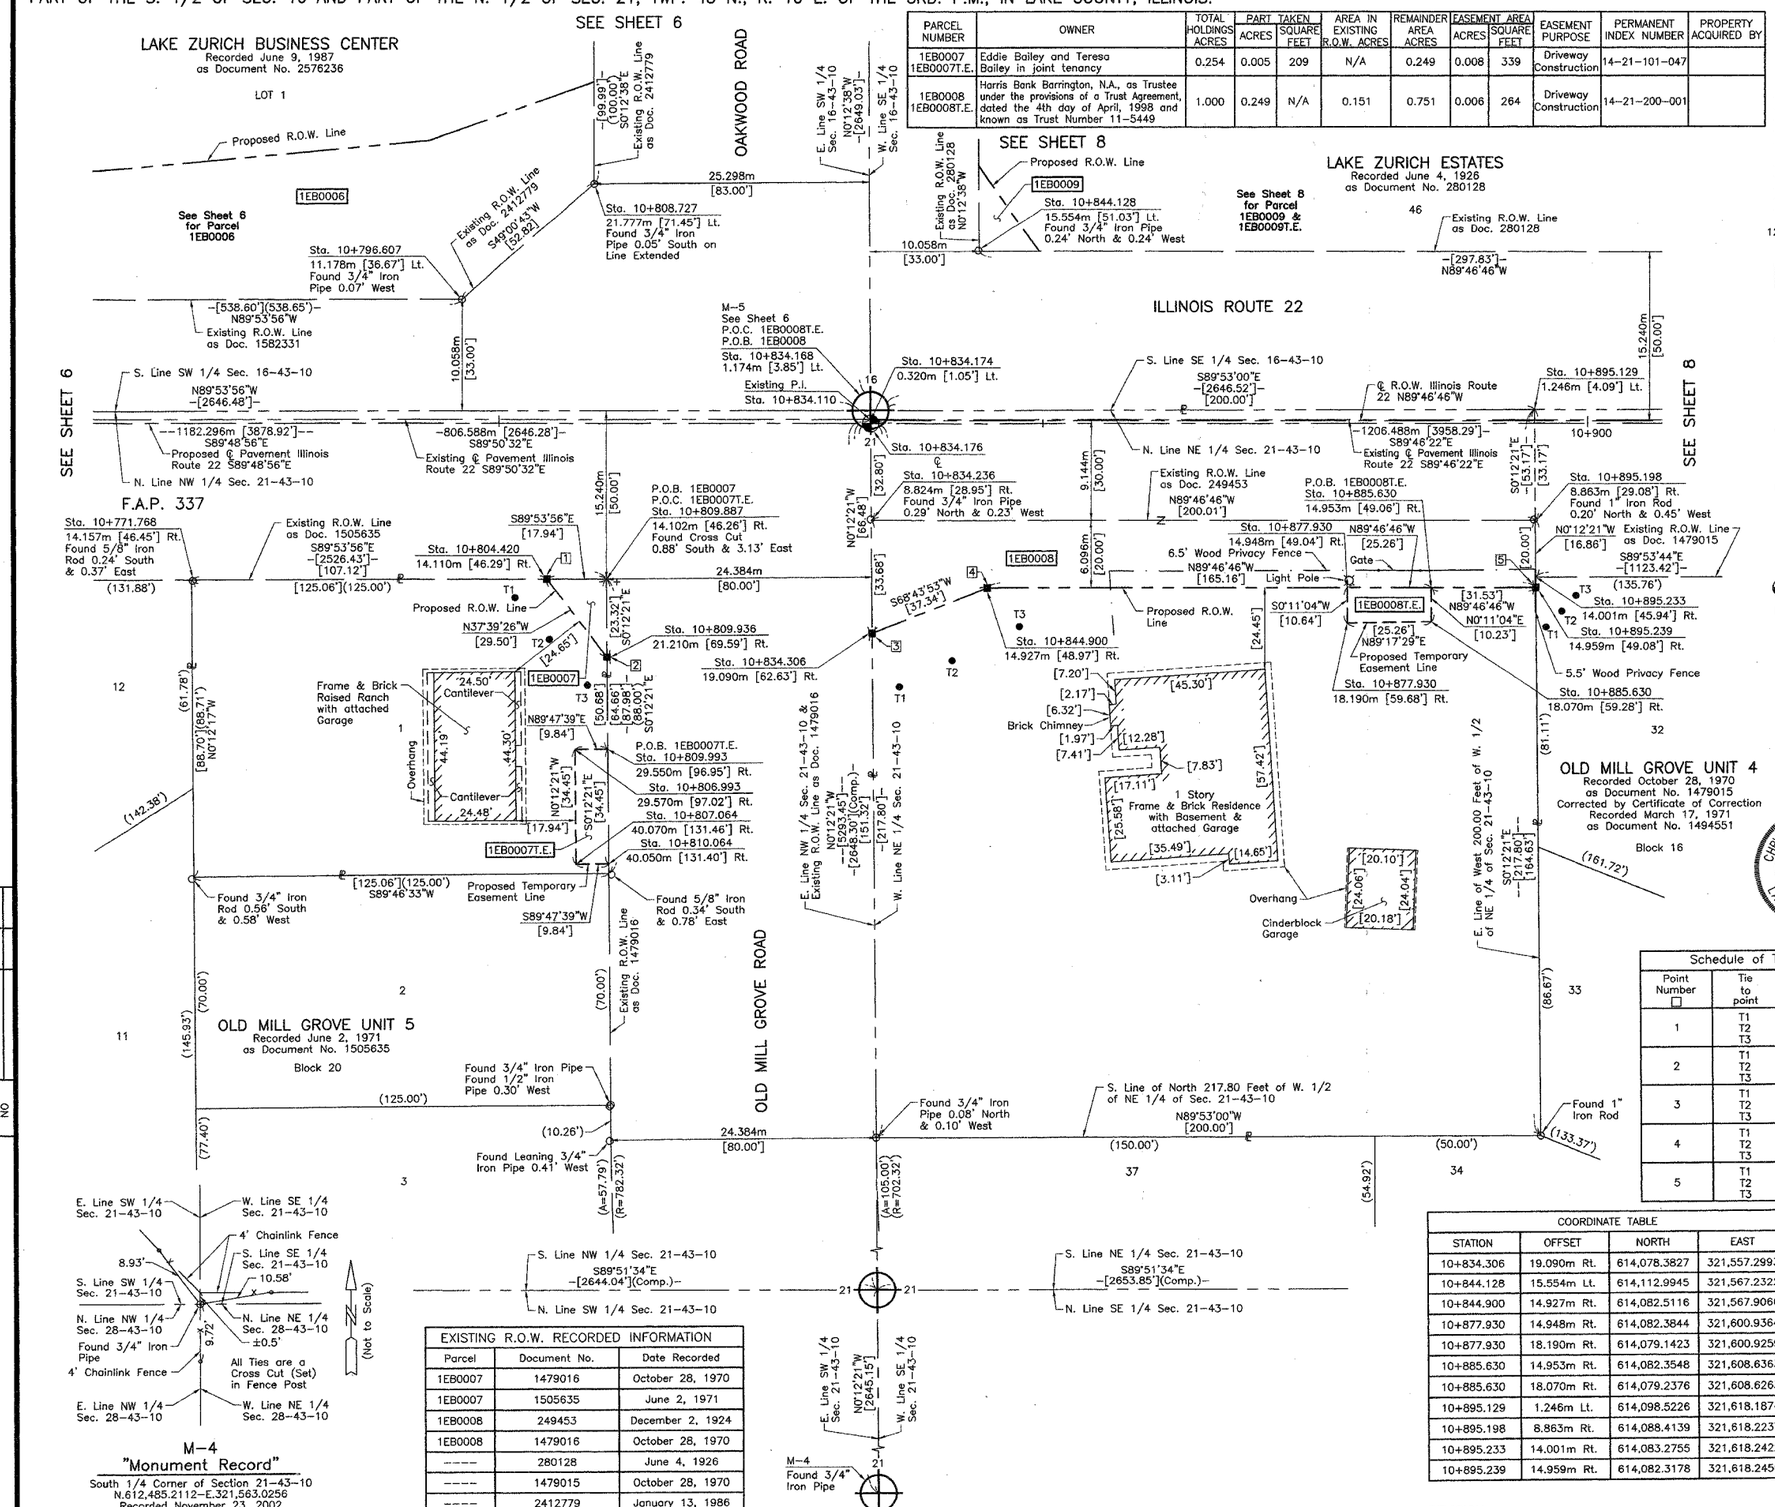

M-4
"Monument Record"

South 1/4 Corner of Section 21-43-10
N.612,485.2112-E.321,563.0256
Recorded November 23, 2002
Document No. 5058552

EXISTING R.O.W. RECORDED INFORMATION		
Parcel	Document No.	Date Recorded
1EB0007	1479016	October 28, 1970
1EB0007	1505635	June 2, 1971
1EB0008	249453	December 2, 1924
1EB0008	1479016	October 28, 1970
----	280128	June 4, 1926
----	1479015	October 28, 1970
----	2412779	January 13, 1986

LEGEND

SECTION CORNER — QUARTER SECTION CORNER

SECTION LINE
QUARTER SECTION LINE
QUARTER, QUARTER SECTION LINE
PLATTED LOT LINE
PROPERTY (DEED) LINE
APPARENT PROPERTY LINE
CENTER LINE
EXISTING RIGHT OF WAY LINE
PROPOSED RIGHT OF WAY LINE
PROPOSED EASEMENT
MEASURED DIMENSION
COMPUTED DIMENSION
RECORD DATA U.S. FOOT
MEASURED DIMENSION U.S. FOOT
120.327m
129.325m(Comp.)

EXISTING BUILDING

SCALE: 1:250

Bearings are referenced to the Illinois State Plane Coordinate System, NAD83, East Zone, as provided by the Illinois Department of Transportation.

○ IRON PIPE OR ROD FOUND
⊕ "MAG" NAIL SET
+ CUT CROSS FOUND OR SET
● 5/8" REBAR SET

● T1 T2 T3 ***THESE STAKES REFERENCE FOUND OR SET MONUMENTATION.*** SET 5/8 INCH IRON ROD FLUSH WITH GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

● BT1 BT2 BT3 ***THESE STAKES, IN CULTIVATED AREAS, REFERENCE FOUND OR SET MONUMENTATION.*** BURIED 5/8 INCH IRON ROD 20 INCHES BELOW GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER

■ ***STAKING OF PROPOSED RIGHT OF WAY.*** SET DIVISION OF HIGHWAYS SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS REGISTRATION NUMBER.

■ M ***STAKING OF PROPOSED RIGHT OF WAY IN CULTIVATED AREAS.*** BURIED 5/8 INCH METAL ROD 20 INCHES BELOW GROUND TO MARK FUTURE SURVEY MARKER POSITION IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER

PERMANENT SURVEY MARKER, I.D.O.T STD 2135 (TO BE SET BY OTHERS)

□ RIGHT OF WAY STAKING PROPOSED TO BE SET

STATE OF ILLINOIS)
)SS
COUNTY OF LAKE)

THIS IS TO CERTIFY THAT WE, JORGENSEN & ASSOCIATES, INC., AN ILLINOIS PROFESSIONAL DESIGN FIRM LAND SURVEYING CORPORATION, NUMBER 184-2771, HAVE SURVEYED THE PLAT OF HIGHWAYS SHOWN HEREON BETWEEN SECTION 16, TOWNSHIP 43N., RANGE 10E. AND SECTION 21, TOWNSHIP 43N., RANGE 10E., OF THE THIRD PRINCIPAL MERIDIAN, LAKE COUNTY, THAT THE SURVEY IS TRUE AND COMPLETE AS SHOWN TO THE BEST OF MY KNOWLEDGE AND BELIEF, THAT THE PLAT CORRECTLY REPRESENTS SAID SURVEY, THAT ALL MONUMENTS FOUND AND ESTABLISHED ARE OF PERMANENT QUALITY AND OCCUPY THE POSITIONS SHOWN THEREON AND THAT THE MONUMENTS ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED. MADE FOR THE DEPARTMENT OF TRANSPORTATION, STATE OF ILLINOIS.

DATED AT LAKE VILLA, ILLINOIS THIS 25th DAY OF November 2002 A.D.

CHRISTIAN H. JORGENSEN 2797 PROFESSIONAL LAND SURVEYOR STATE OF ILLINOIS LAKE VILLA, ILLINOIS

Christian H. Jorgensen PRESIDENT
ILLINOIS PROFESSIONAL LAND SURVEYOR NO. 35-2797
LICENSE EXPIRATION DATE: NOVEMBER 30, 2002

NOTE: COORDINATES ARE GROUND VALUES AND CAN BE CONVERTED TO GRID VALUES BY MULTIPLYING THE PUBLISHED GROUND COORDINATES BY AN AVERAGE COMBINED SCALE FACTOR OF 0.9999454, AS PROVIDED BY THE ILLINOIS DEPARTMENT OF TRANSPORTATION.

Schedule of Ties		
Point Number □	Tie to point	Tie Distance (feet)
1	T1 T2 T3	11.09 18.02 33.93
2	T1 T2 T3	32.88 18.13 10.25
3	T1 T2 T3	17.93 25.41 44.45
4	T1 T2 T3	39.74 24.22 15.08
5	T1 T2 T3	12.24 10.58 12.32

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
10+771.768	14.157m Rt.	614,083.5167	321,494.7776
10+796.607	11.178m Lt.	614,108.7713	321,519.6982
10+804.420	14.110m Rt.	614,083.4592	321,527.4294
10+806.993	29.570m Rt.	614,067.9902	321,529.9524
10+807.064	40.070m Rt.	614,057.4903	321,529.9902
10+808.727	21.777m Lt.	614,119.3318	321,531.8518
10+809.887	14.102m Rt.	614,083.4496	321,532.8969
10+809.936	21.210m Rt.	614,076.3411	321,532.9224
10+809.993	29.550m Rt.	614,068.0010	321,532.9524
10+810.064	40.050m Rt.	614,057.5010	321,532.9901
10+834.168	1.174m Lt.	614,098.6467	321,557.2264
10+834.174	0.320m Lt.	614,097.7933	321,557.2295
10+834.176	℄	614,097.4730	321,557.2307
10+834.236	8.824m Rt.	614,088.6486	321,557.2624

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
10+834.306	19.090m Rt.	614,078.3827	321,557.2993
10+844.128	15.554m Lt.	614,112.9945	321,567.2322
10+844.900	14.927m Rt.	614,082.5116	321,567.9066
10+877.930	14.948m Rt.	614,082.3844	321,600.9364
10+877.930	18.190m Rt.	614,079.1423	321,600.9259
10+885.630	14.953m Rt.	614,082.3548	321,608.6363
10+885.630	18.070m Rt.	614,079.2376	321,608.6263
10+895.129	1.246m Lt.	614,098.5226	321,618.1874
10+895.198	8.863m Rt.	614,088.4139	321,618.2237
10+895.233	14.001m Rt.	614,083.2755	321,618.2422
10+895.239	14.959m Rt.	614,082.3178	321,618.2456

JORGENSEN & ASSOCIATES, INC.
120 PARK AVENUE
LAKE VILLA, ILLINOIS 60046
(847) 356-3371

SHEET 1 IS A COVER SHEET AND IS NOT RECORDED.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
337	20 HRS-6	LAKE	318	123
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

CONTRACT NO. 62030

PLAT OF HIGHWAYS
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.P. 337 (ILLINOIS ROUTE 22)

SECTION — LAKE COUNTY
PROJECT — JOB NO. R-91-009-01
STATION 10+750 — TO STATION 10+900
SCALE: 1:250/1"=6.35 — SHEET 7 OF 26

BUREAU OF LAND ACQUISITION
201 WEST CENTER COURT
SCHAUMBURG, ILLINOIS 60196

ROW PLAT	BY	DATE
MADE		
CHECKED		
INKED		
NOTEBOOK NO		

REVISION DATE — REVISION — MADE BY

ROUTE F.A.P. 337 (ILLINOIS ROUTE 22) — SECTION — COUNTY LAKE — JOB NO. R-91-009-01 — RECORDING: RECORDED ON — AS DOCUMENT NO.