



91306

*00-19134-00-BR

INTENDED SEQUENCE

1. PLACEMENT OF PERIMETER EROSION CONTROL BARRIER PRIOR TO COMMENCEMENT OF ANY WORK. SEE STANDARD 280001.
2. CONSTRUCTION OF NEW SUBSTRUCTURE.
3. REMOVAL OF THE EXISTING STRUCTURE.
4. CONSTRUCTION OF THE NEW SUPERSTRUCTURE.
5. THE PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROLS.
6. FINAL GRADING AND SHAPING INCLUDING PLACEMENT OF AGGREGATE BASE COURSE & BITUMINOUS SURFACE.
7. REMOVAL AND PROPER CLEAN UP OF TEMPORARY EROSION CONTROLS.
8. PLACEMENT OF PERMANENT EROSION CONTROLS.

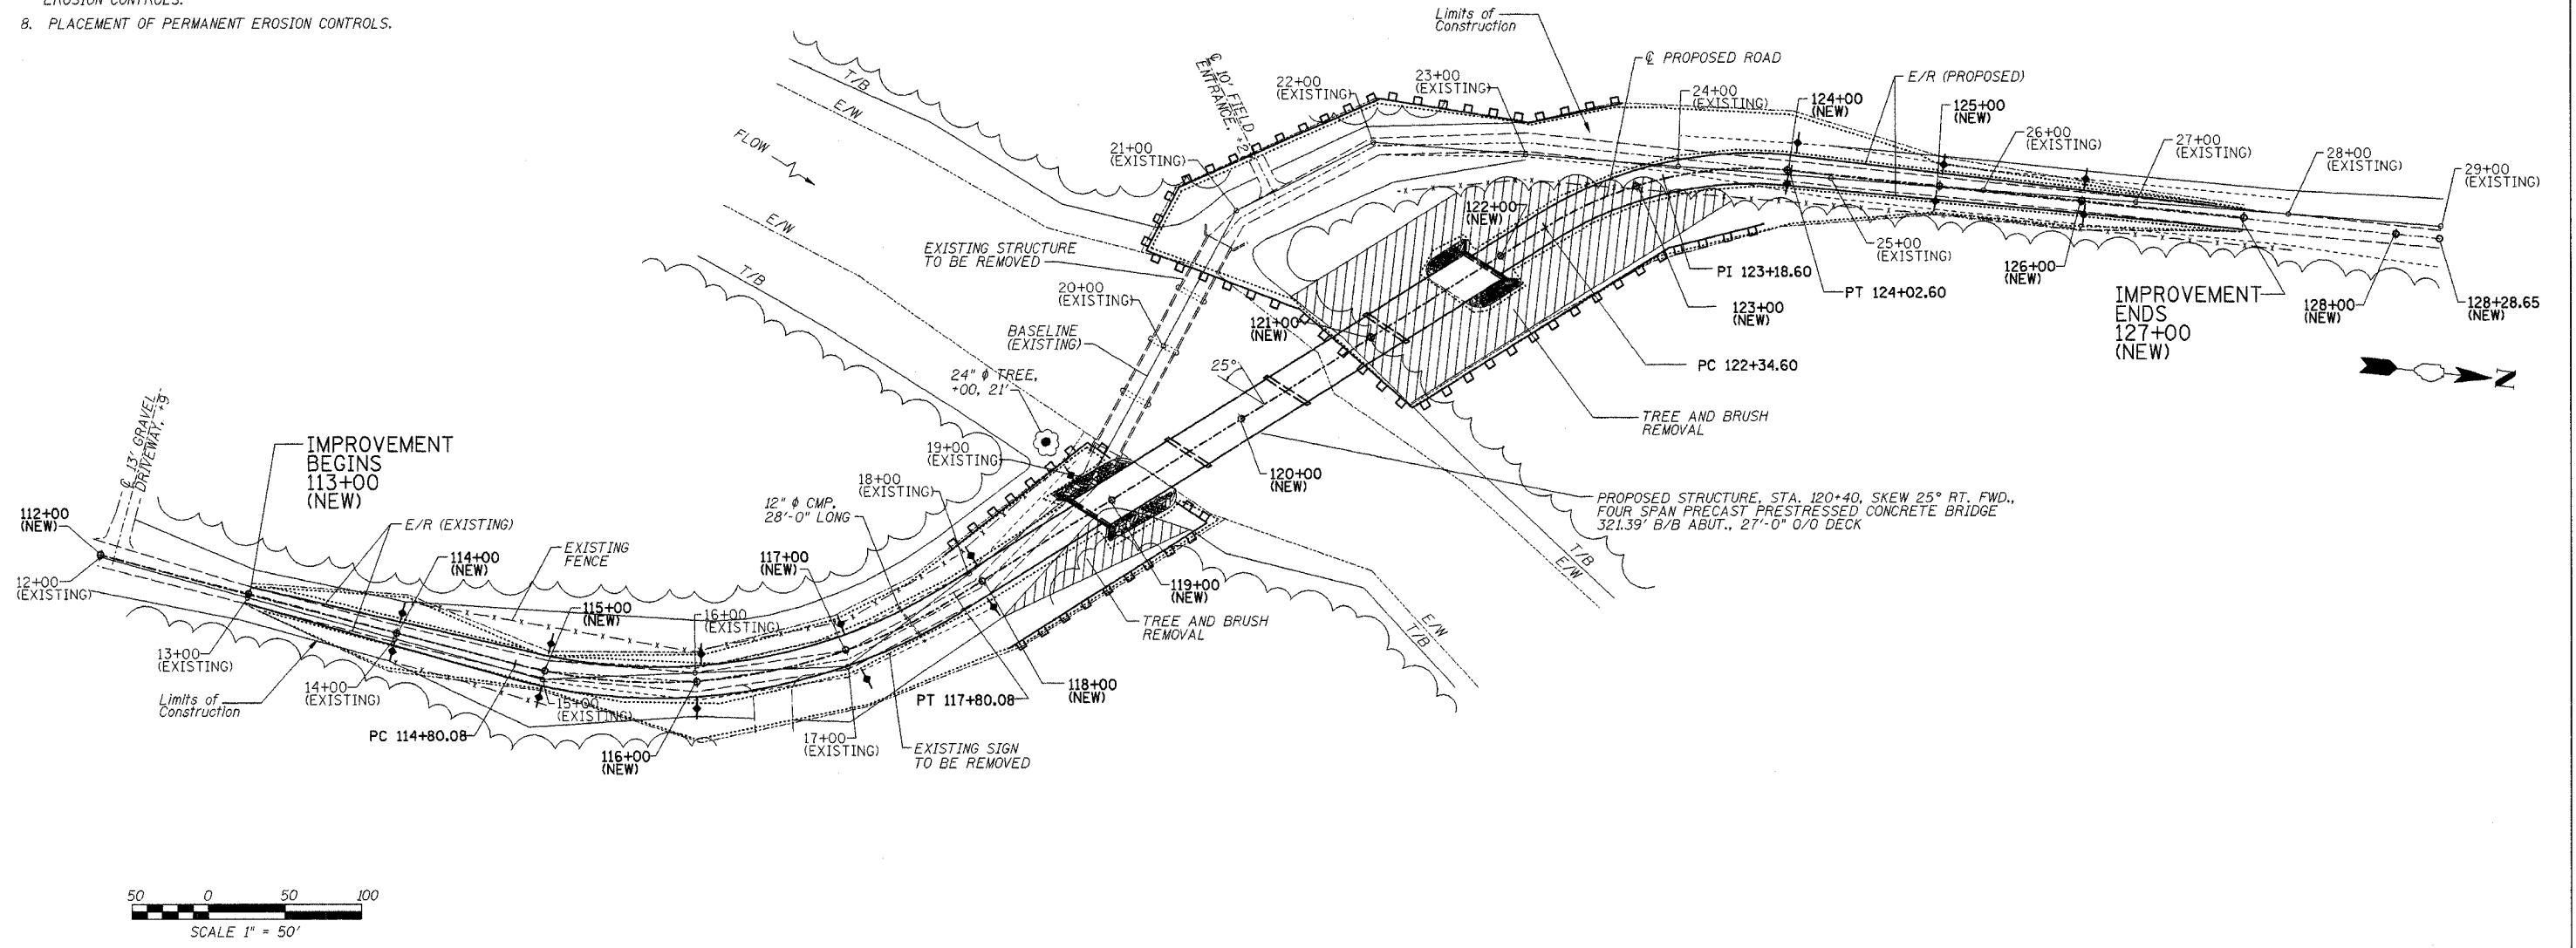

PERMANENT EROSION CONTROL

- Grouted RipRap
- Seeding, Cl. 2 with Fertilizer and Mulch

TEMPORARY EROSION CONTROL

- Temporary Ditch Check
- Perimeter Erosion Barrier

PERIMETER EROSION BARRIER

STA	OFFSET	TO	STA	OFFSET	LENGTH
118+00	60' RT		119+40	60' RT	140 FT
118+00	30' LT		119+10	40' LT	110 FT
119+10	40' LT		119+10	25' LT	15 FT
119+20	40' RT		119+20	25' RT	15 FT
120+10	125' LT		121+00	50' RT	175 FT
120+10	125' LT		120+45	150' LT	45 FT
120+45	150' LT		121+85	130' LT	140 FT
121+85	130' LT		122+60	65' LT	100 FT
122+60	65' LT		123+20	60' LT	60 FT
121+00	50' RT		123+00	50' RT	200 FT
123+00	50' RT		123+80	35' RT	80 FT
TOTAL					1080 FT

TEMPORARY DITCH CHECKS

STA	OFFSET	QUANTITY
114+00	LT. & RT.	2 EACH
115+00	LT. & RT.	2 EACH
116+00	LT. & RT.	2 EACH
117+00	LT. & RT.	2 EACH
118+00	LT. & RT.	2 EACH
119+00	LT.	1 EACH
124+00	LT. & RT.	2 EACH
125+00	LT. & RT.	2 EACH
126+00	LT. & RT.	2 EACH
TOTAL		17 EACH

TEMPORARY EROSION CONTROL		
Bill of Materials		
Item	Unit	Quantity
Temporary Erosion Control Seeding	Pound	850
Temporary Ditch Checks	Each	17
Perimeter Erosion Barrier	Foot	1080