SIGN DETAIL
1:190

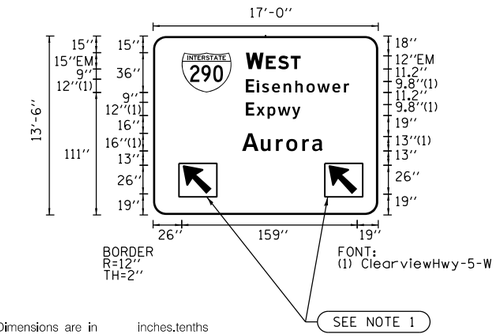

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

SIGN NUMBER	NW-01-OV (1823+65.50)
WIDTH x HGHT.	17'-0" x 13'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro-Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ
	COLOR: White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	26	111	45	36
AR_Type A	45	27	19	21	33.1
AR_Type A	45	159	19	21	33.1

LETTER POSITIONS (X)

															LENGTH	SERIES/SIZE
W	E	S	T													EM 2000
84.2	102.3	113.3	124.8												49.5	15,12
E	i	s	e	n	h	o	w	e	r							ClearviewHwy-5-W
84.1	93.7	98.8	107.8	118.3	128.9	139	148.8	162.4	173						93.4	12,9.88
E	x	p	w	y												ClearviewHwy-5-W
84.1	93.7	103.8	113.1	125.9											49.5	12,9.88
A	u	r	o	r	a											ClearviewHwy-5-W
80.6	97.7	111.5	120.7	135.2	144.1										73.2	16,13\10.6

SIGN DETAIL
1:190

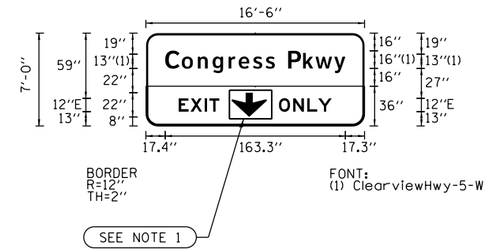

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

SIGN NUMBER	NW-02-OV (1823+65.50)
WIDTH x HGHT.	16'-6" x 7'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro-Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ
	COLOR: White

SYMBOL	ROT	X	Y	WID	HT
ARDOWN	0	77.5	8.1	32	22
ARDOWN	0	78.4	8.7	30	20.6

LETTER POSITIONS (X)

															LENGTH	SERIES/SIZE
C	o	n	g	r	e	s	s	P	k	w	y					ClearviewHwy-5-W
17.4	32.5	46.9	60.4	74.8	84	97	108.4	128.7	142.4	153.5	170.5				163.3	16,13\10.6
E	X	I	T													E 2000
29.7	40.4	53.2	57.4												36.7	12
O	N	L	Y													E 2000
120.4	133.2	146.1	156												47.9	12

NOTE:

1. ALL ARROWS (DOWN OR 45°) USED ON OVERHEAD SIGNS SHALL BE DEMOUNTABLE. THE COST OF DEMOUNTABLE ARROWS SHALL BE INCLUDED IN THE COST OF SIGN PANEL.

AECOM
303 EAST WACKER DRIVE, SUITE 1400
CHICAGO, IL 60601-5276
PHONE: (312) 373-7700 FAX: (312) 373-6800

D160W28-sht-Sign-Det-02.dgn	DESIGNED - OPS	REVISED -	
USER NAME = pimsarno	DRAWN - NSA	REVISED -	
PLOT SCALE = 20.0000 ' / in.	CHECKED - KCF	REVISED -	
PLOT DATE = 4/27/2014	DATE - 04/28/14	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: NONE | SHEET 2 OF 3 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-010R	COOK	747	278

CONTRACT NO. 60W28
ILLINOIS FED. AID PROJECT

FILE PATH = pw:\\388039-pwui.aecomonline.local:PWAECOM00\Documents\01 Americas\Transportation\60269938 Circle\Phase II\000.CAD\006.Roadway\Sheets\60W28_Contract\D160W28-sht-Sign-Det-02.dgn