
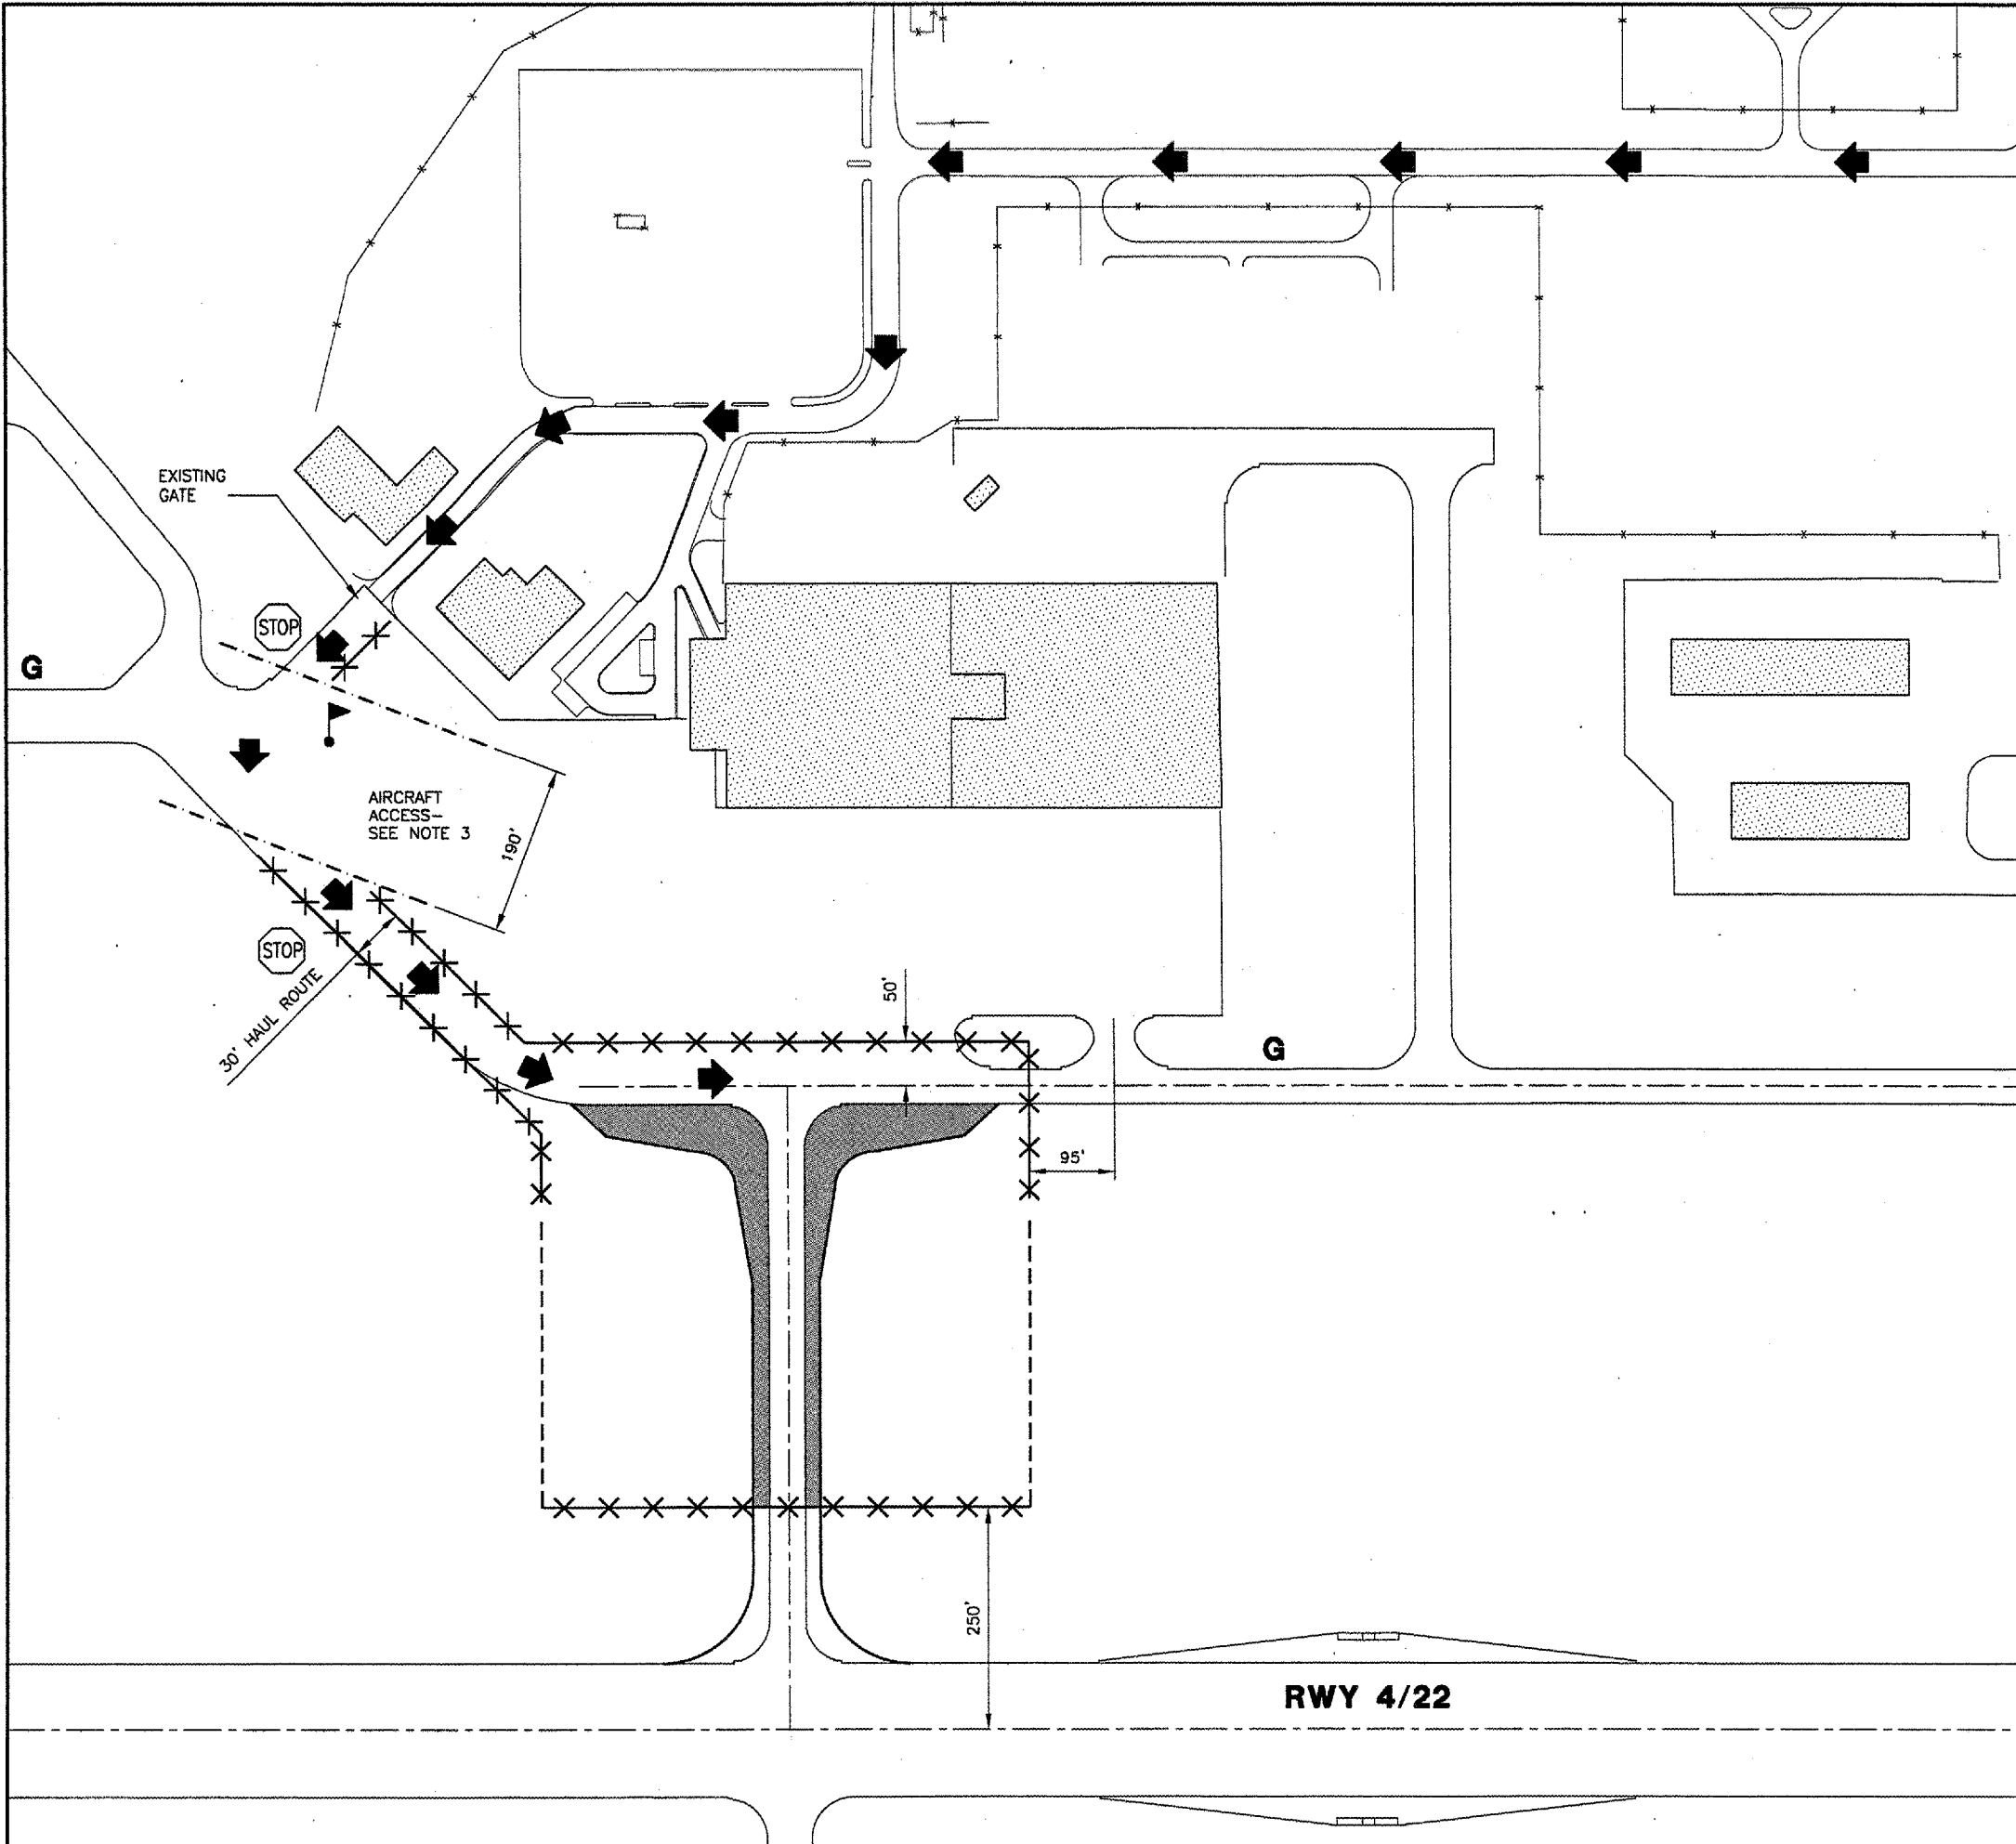


REVISIONS		
NUMBER	BY	DATE

**CONSTRUCTION ACTIVITY PLAN NOTES
 PHASE 1**

1. THE CONTRACTOR SHALL PLACE ALL BARRICADES AS SHOWN PRIOR TO STARTING WORK ON THIS PHASE.
2. THE AIRPORT WILL REQUIRE 3 CALENDAR DAYS NOTICE FROM THE CONTRACTOR PRIOR TO INITIATING THIS PHASE TO COORDINATE WITH THE TENANTS.
3. THE CONTRACTOR SHALL CONTINUOUSLY CLEAN THIS AREA FOR AIRCRAFT ACCESS.
4. THE CONTRACTOR SHALL REMOVE HAUL ROUTE BARRICADES AND CLEAN PAVEMENT AT THE END OF EACH WORK DAY.



LEGEND

	WORK AREA
	CONSTRUCTION SETBACK LINE
	BARRICADES IDOT TYPE 1 WITH FLASHING RED LIGHTS & 20"x20" ORANGE FLAGS @ 20' SPACING
	CONTRACTOR ACCESS ROUTE
	CONTRACTOR'S FLAGMAN IN CONTACT WITH THE AIR TRAFFIC CONTROL TOWER CONTROLLING HAUL TRAFFIC MOVEMENT
	STOP SIGN MOUNTED ON BARRICADE
	LIMITS OF AREA TO BE PROVIDED FOR AIRCRAFT ACCESS



**SPRINGFIELD AIRPORT AUTHORITY
 ABRAHAM LINCOLN CAPITAL AIRPORT
 SPRINGFIELD, ILLINOIS**

**WIDEN TAXIWAY F
 CONSTRUCTION ACTIVITY PLAN 1**

© Copyright CMT, Inc.
CMT
 CRAWFORD, MURPHY & TULLY, INC.
 CONSULTING ENGINEERS
 License No. 84-000613

DESIGN BY:	RLV
DRAWN BY:	CMT
CHECKED BY:	<i>RLV</i>
APPROVED BY:	<i>RLV</i>
DATE:	AUGUST 07, 2007
JOB No:	07035-02-00

GROUND CONTROL FREQUENCY - 121.90
 AIR CONTROL FREQUENCY - 124.30
 MAXIMUM HEIGHT OF EQUIPMENT - 25'