SIGN DETAIL

1:100

SIGN PANEL DESIGN SHALL BE COORDINATED WITH
IDOT TRAFFIC OPERATIONS SECTION PRIOR TO MANUFACTURING

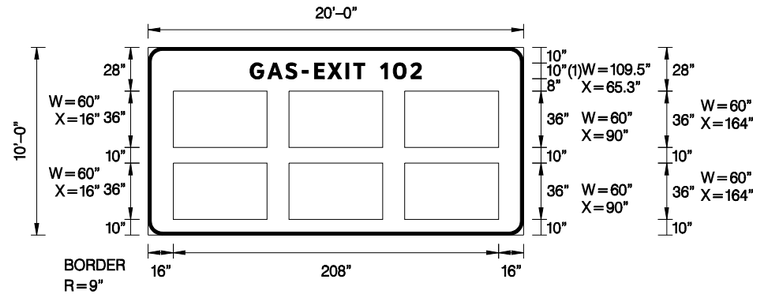

BORDER
R=9"
TH=2"

FONT:
(1) ClearviewHwy–5–W
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	566+50
WIDTH x HGHT.	20'–0" x 10'–0"
BORDER WIDTH	2"
CORNER RADIUS	9"
MOUNTING	Ground
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 47
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 92/Color 92

SYMBOL	ROT	X	Y	WID	HT
LOGO PANEL MAINLINE	0	16	56	60	36
LOGO PANEL MAINLINE	0	90	56	60	36
LOGO PANEL MAINLINE	0	164	56	60	36
LOGO PANEL MAINLINE	0	16	10	60	36
LOGO PANEL MAINLINE	0	90	10	60	36
LOGO PANEL MAINLINE	0	164	10	60	36

Panel Style: guide_fwy_next_services_clearview_mainline.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

G	A	S	–	E	X	I	T		1	0	2	LENGTH	SERIES/SIZE
													ClearviewHwy–5–W
65.3	76.4	87.9	98.5	106.4	115	126.4	131.4	138.6	148.6	156.8	167.9	109.5	10

FILE NAME =	DESIGNED - SMS	REVISED -	Kaskaskia Engineering Group, LLC
...\D468620-sht-signdetail16.dgn	DRAWN - SMS	REVISED -	
USER NAME = IDOT	CHECKED - LDC	REVISED -	
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: | SHEET NO. 16 OF 37 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-[14R;(14HB-4,14,14HVB)BR]	TAZEWELL	2433	1599
		CONTRACT NO. 68620		
		ILLINOIS FED. AID PROJECT		

• 74 & 155