SIGN DETAIL

1:100

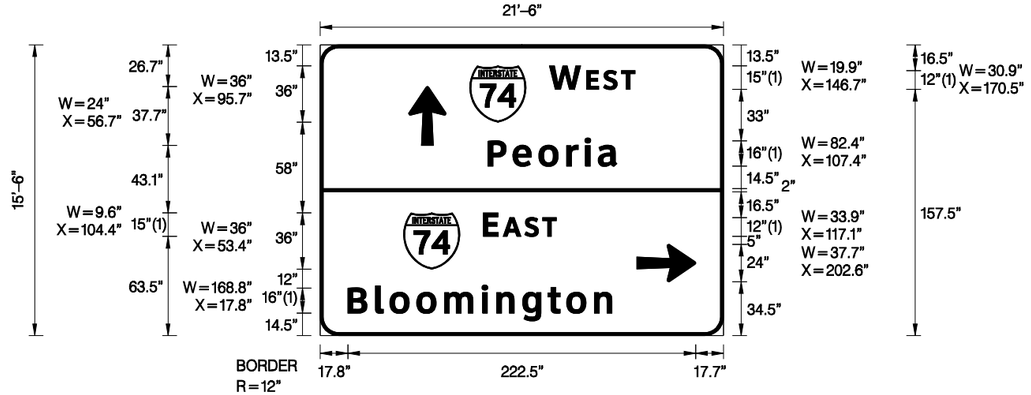

BORDER
R=12"
TH=2"
FONT:
(1) ClearviewHwy–5–W
M.U.T.C.D.: 2009 Edition

Panel Style: guide_fwy_intermediate_clearview.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

SIGN NUMBER	29+00
WIDTH x HGHT.	21'–6" x 15'–6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 24
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 92/Color 92

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	95.7	136.5	36	36
AR_Type A	0	56.7	121.6	24	37.7
M1_1	0	53.4	42.5	36	36
AR_Type A	270	202.6	34.5	24	37.7

LETTER POSITIONS (X)

																																		LENGTH	SERIES/SIZE
W	E	S	T																																ClearviewHwy–5–W
146.7	170.5	181.3	192.7																															54.7	15,12
P	e	o	r	i	a																														ClearviewHwy–5–W
107.4	123.3	139.9	157.7	169.4	177.9																													82.4	1613
E	A	S	T																																ClearviewHwy–5–W
104.4	117.1	130.9	142.4																															46.7	15,12
B	l	o	o	m	i	n	g	t	o	n																									ClearviewHwy–5–W
17.8	35.4	44.7	61.8	79.6	103.5	113	129.5	145.7	157.7	175.5																								168.8	1613

FILE NAME = ...\D468620-sht-signdetail25.dgn	DESIGNED - SMS	REVISED -	Kaskaskia Engineering Group, LLC
USER NAME = IDOT	DRAWN - SMS	REVISED -	
PLOT DATE = 7/16/2012	CHECKED - LDC	REVISED -	
	DATE - JULY 20, 2012	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: | SHEET NO. 25 OF 37 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-(14R;(14HB-4,14,14HVB)BR)	TAZEWELL	2433	1608
		CONTRACT NO. 68620		
	ILLINOIS FED. AID PROJECT			

• 74 & 155