F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1395	09-00109-00-RS	KANE	18	15
CONTRACT NO. 63294				

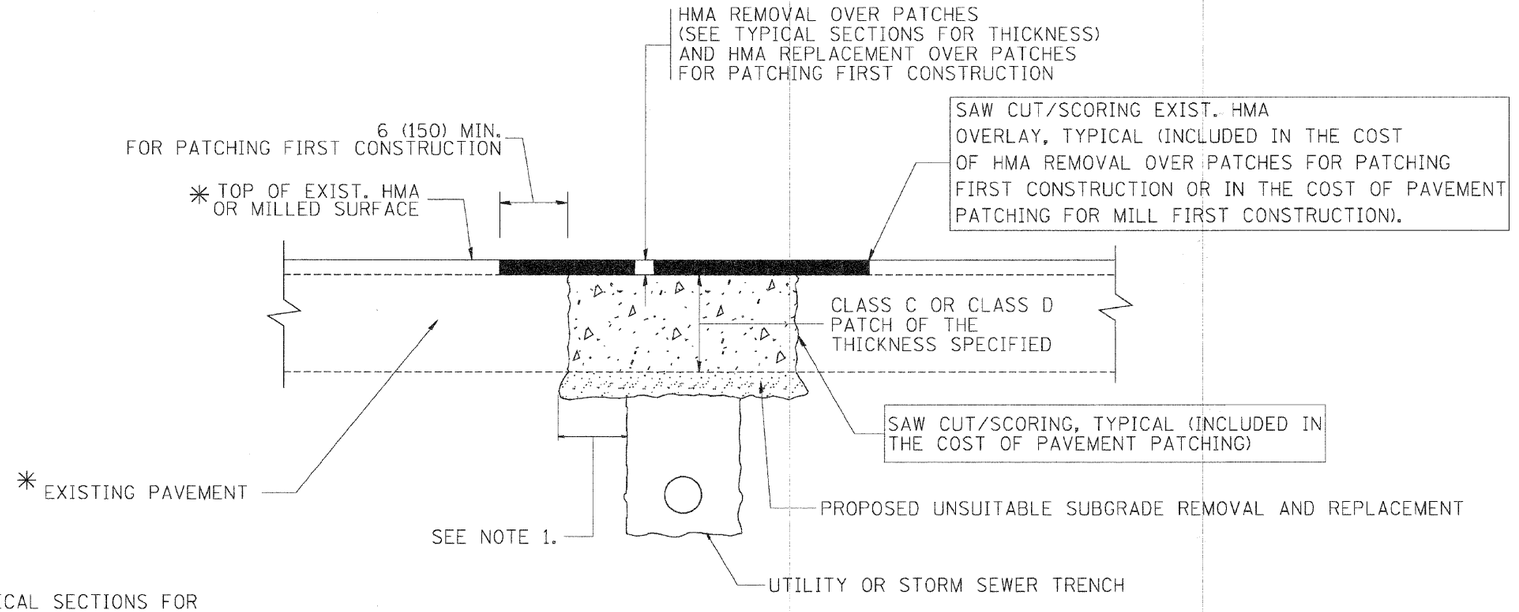

* SEE TYPICAL SECTIONS FOR THICKNESS AND MATERIALS

NOTES:

1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".

SEQUENCE OF CONSTRUCTION (PATCHING FIRST)

1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
2. REMOVE AND REPLACE WITH CLASS C OR D PATCH.
3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

SEQUENCE OF CONSTRUCTION (MILLING FIRST)

1. MILL HMA FIRST IF THERE IS AT LEAST 4½ INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN PLACE AFTER MILLING.
2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = c:\projects\distd22x34\bd22.dgn	USER NAME = bauerdl	DESIGNED - R. SHAH	REVISED - A. ABBAS 04-27-98	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT
		DRAWN -	REVISED - R. BORO 01-01-07		
	PLOT SCALE = 50.800 ' / IN.	CHECKED -	REVISED - R. BORO 09-04-07		SCALE= NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.
	PLOT DATE = 10/27/2008	DATE - 10-25-94	REVISED - K. ENG 10-27-08		

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	BD400-04 (BD-22)	CONTRACT NO.		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

COPYRIGHT © 2009 ENGINEERING ENTERPRISES, INC.

Engineering Enterprises, Inc.
CONSULTING ENGINEERS
52 Wheeler Road
Sugar Grove, Illinois 60554
630.466.6700 / www.eeiweb.com

CITY OF GENEVA
KANE COUNTY, ILLINOIS

NO.	DATE	REVISIONS

KANEVILLE ROAD
LAPP IMPROVEMENTS

PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT
BD-22

DATE: AUGUST 2009
PROJECT NO: GE0901
FILE: GE0901-CVR
SHEET 15 OF 18

Plotted: August 25, 2009 @ 3:15 PM By: Kris Pung - Tab: 15 BD-22 22x34
Path: H:\SDSKPROJ\GE0901\DWG\DWG FINAL ENG\GE0901-CVR