


STAGE I CONSTRUCTION

SEQUENCE OF CONSTRUCTION

STAGE I PRECONSTRUCTION
 CONSTRUCT TEMPORARY HMA SHOULDERS (PAID FOR AS: HOT-MIX ASPHALT SHOULDERS, 8") ADJACENT TO SOUTHBOUND LANE AND TEMPORARY ENTRANCE WIDENING IN NORTHBOUND LANE TO BE USED FOR STAGE I TRAFFIC USING TRAFFIC CONTROL AND PROTECTION STANDARD 701326.

STAGE I CONSTRUCTION
 CONSTRUCT PROPOSED HMA PAVEMENT, PROPOSED GUARDRAIL, AND THE STAGE I PORTION OF THE PROPOSED CULVERT (SEE STRUCTURE PLANS) IN THE NORTHBOUND LANES USING TRAFFIC CONTROL AND PROTECTION STANDARD 701321.

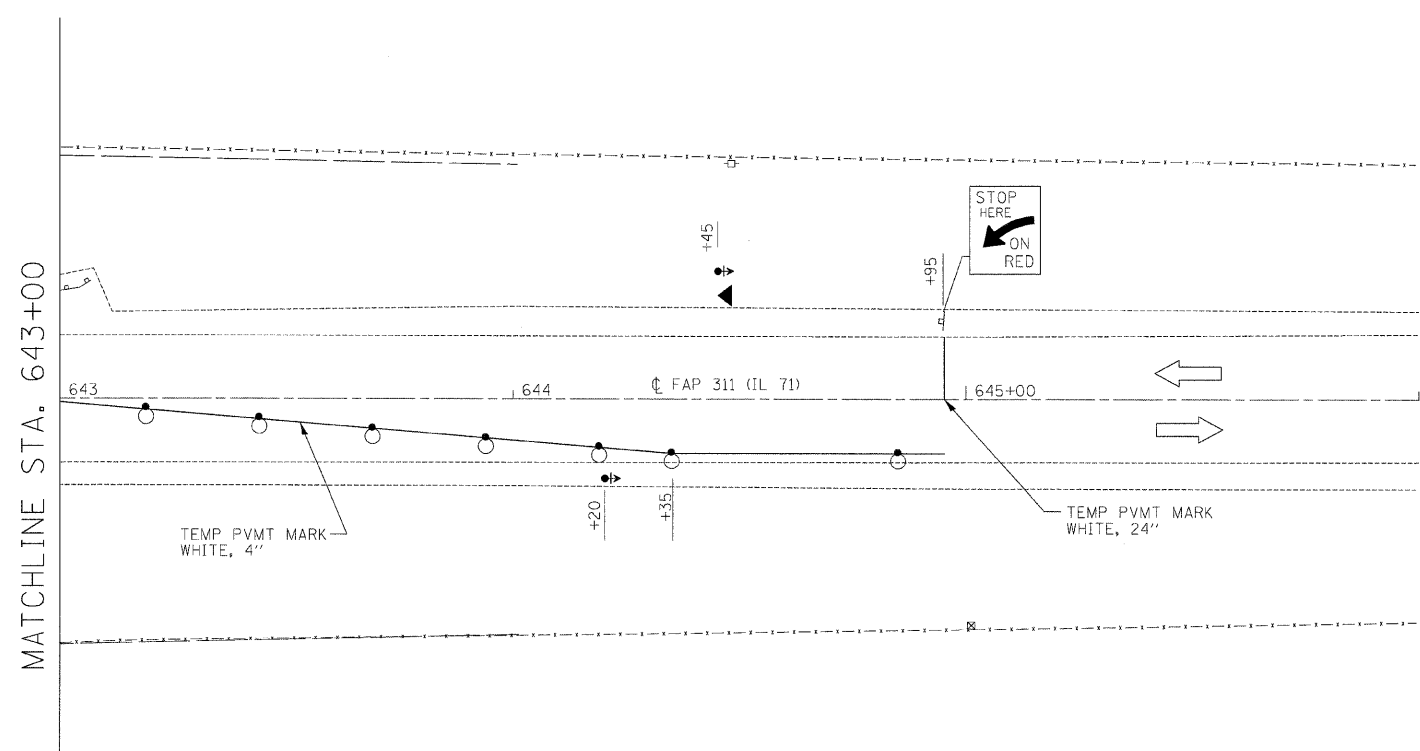

STAGE I CONSTRUCTION

SIGNING SCHEDULE (SIGNS NOT SHOWN)

SIGN	LOCATION	OFF.	SIGN DESCRIPTION
W12-1102(O)-48	IL 71 N. OF I-80	RT	WIDTH RESTRICTION SIGN (SEE DETAILS SHEET)
W12-1101(O)	IL 71 N. OF I-80	RT	7 MILES AHEAD ATTACHED TO WIDTH REST. SIGN
W12-1103(O)-48	617+29	RT	ROAD CONSTRUCTION AHEAD
W12-1102(O)-48	622+29	RT	WIDTH RESTRICTION SIGN (SEE DETAILS SHEET)
W20-4(O)-48	627+29	RT	ONE LANE ROAD AHEAD
W13-1(O)-2424	627+29	RT	SPEED RESTRICT. (45 MPH) ATTACHED TO W13-1(O)-2424
W3-3(O)-48	632+29	RT	TRAFFIC SIGNAL AHEAD
W12-1103(O)-48	664+95	LT	ROAD CONSTRUCTION AHEAD
W12-1102(O)-48	659+95	LT	WIDTH RESTRICTION SIGN (SEE DETAILS SHEET)
W20-4(O)-48	654+95	LT	ONE LANE ROAD AHEAD
W13-1(O)-2424	654+95	LT	SPEED RESTRICT. (45 MPH) ATTACHED TO W13-1(O)-2424
W3-3(O)-48	649+95	LT	TRAFFIC SIGNAL AHEAD

LEGEND

- WORK AREA
- SIGN
- TYPE III BARRICADE
- TRAFFIC SIGNAL WITH BACKPLATE
- MICROWAVE DETECTOR
- IMPACT ATTENUATOR
- DRUM WITH STEADY BURNING LIGHT
- TEMPORARY CONCRETE BARRIER