
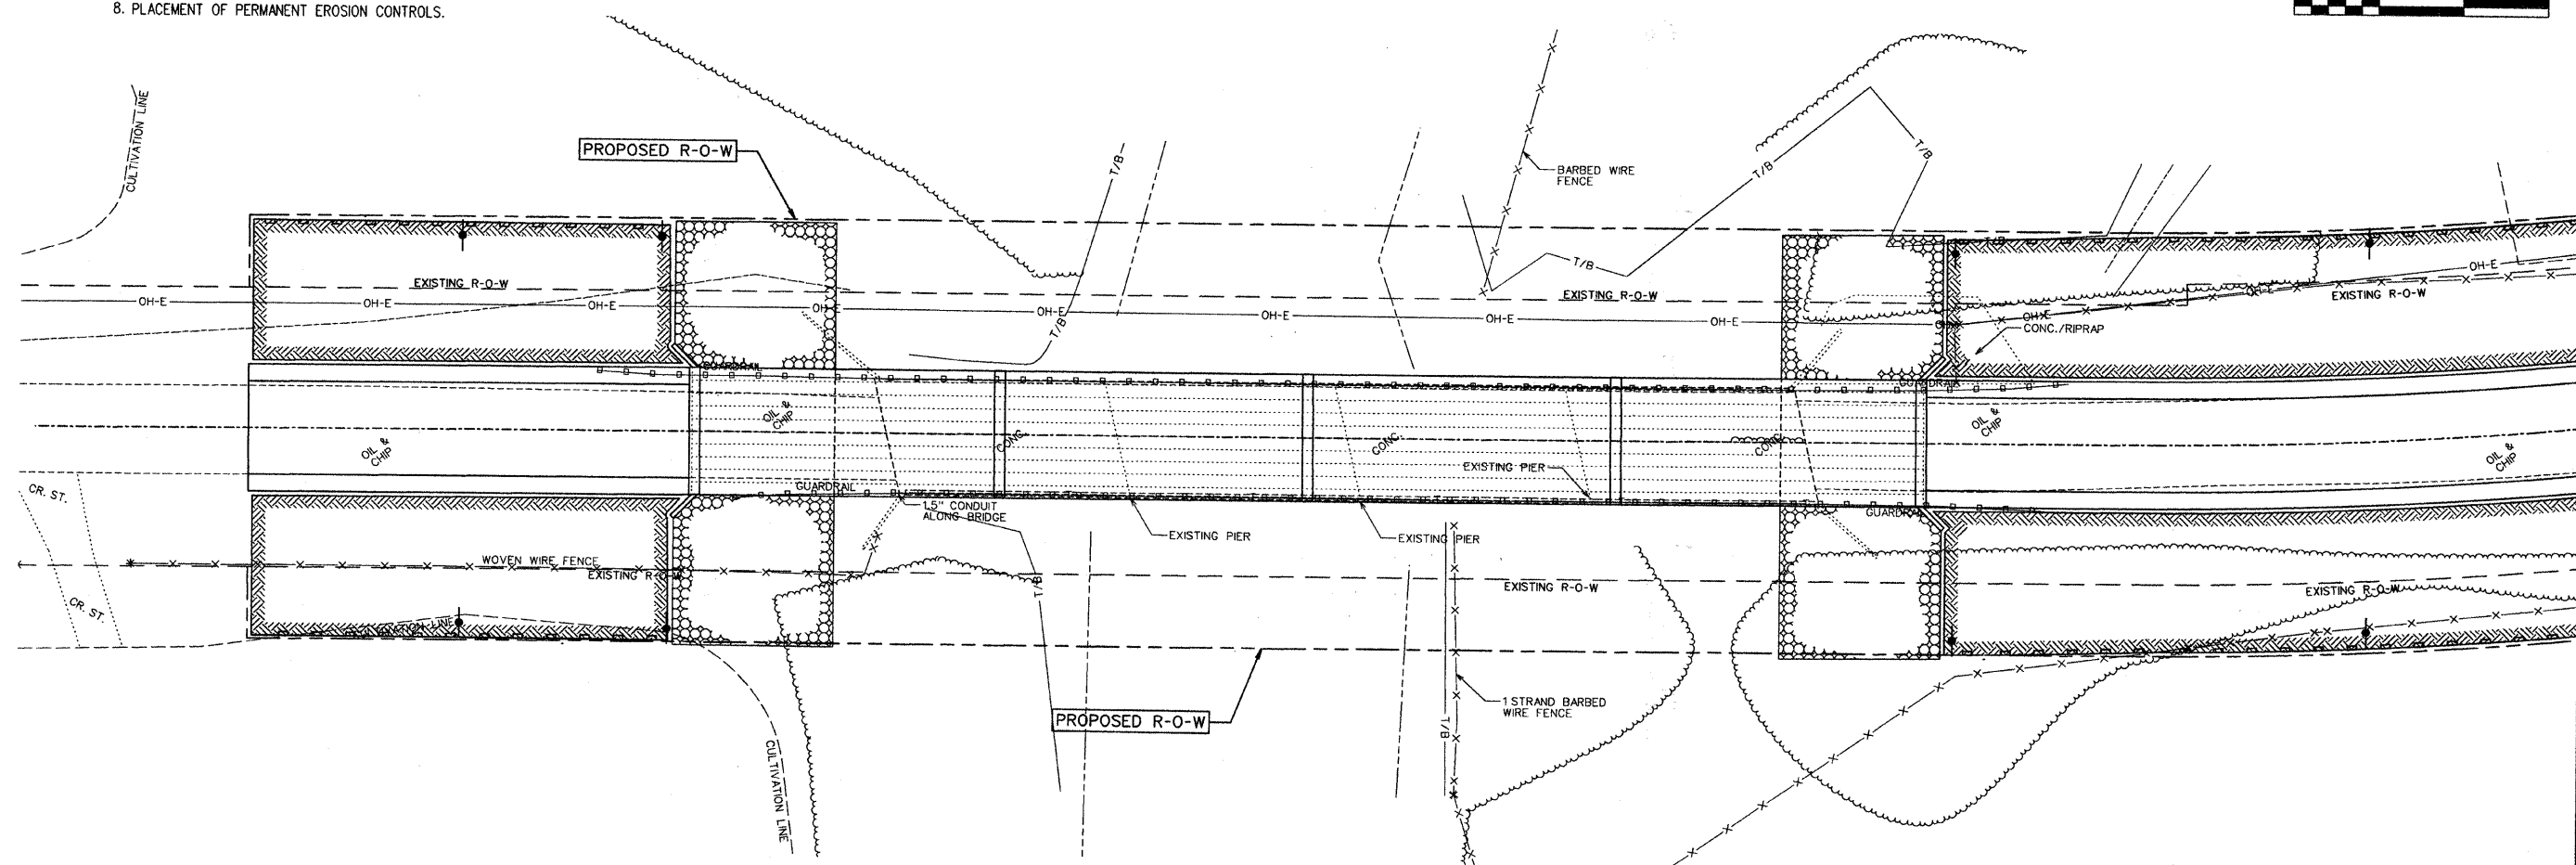


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
C.H. 22	05-00907-00-BR	CHAMPAIGN	36	9
STA.	TO STA.			
F.H.W.A. REG.	ILLINOIS	PROJECT		

INTENDED SEQUENCE

1. PLACEMENT OF PERIMETER EROSION CONTROL BARRIER PRIOR TO COMMENCEMENT OF ANY WORK. SEE STANDARD 28001.
2. REMOVAL OF THE EXISTING STRUCTURE.
3. CONSTRUCTION OF THE NEW SUB STRUCTURE.
4. CONSTRUCTION OF THE NEW SUPERSTRUCTURE.
5. THE PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROLS.
6. FINAL GRADING AND SHAPING INCLUDING PLACEMENT OF AGGREGATE BASE COURSE & BITUMINOUS SURFACE.
7. REMOVAL & PROPER CLEAN UP OF TEMPORARY EROSION CONTROLS.
8. PLACEMENT OF PERMANENT EROSION CONTROLS.



MATCHLINE SEE STA. 13+00 FOR CONTINUATION

PERMANENT EROSION CONTROL

- GROUTED RIPRAP
- SEEDING, CLASS 2

TEMPORARY EROSION CONTROL

- PERIMETER EROSION BARRIER
- TEMPORARY DITCH CHECK

PERIMETER EROSION BARRIER

STA	OFFSET	TO	STA	OFFSET	LENGTH
7+50	50' LT		8+54	50' LT	104 FT
7+50	50' RT		8+54	50' RT	104 FT
11+46	50' LT		14+53	50' LT	307 FT
11+46	50' RT		14+53	50' RT	307 FT
TOTAL					822 FT

TEMPORARY DITCH CHECKS

STA	OFFSET	QUANTITY
8+00	48' RT	1 EACH
8+00	48' LT	1 EACH
8+50	48' RT	1 EACH
8+50	48' LT	1 EACH
11+50	48' RT	1 EACH
11+50	48' LT	1 EACH
12+50	48' RT	1 EACH
12+50	48' LT	1 EACH
13+50	48' RT	1 EACH
13+50	48' LT	1 EACH
TOTAL		10 EACH

TEMPORARY EROSION CONTROL

THE FOLLOWING QUANTITIES ARE ESTIMATES ONLY. ACTUAL QUANTITIES FOR EROSION CONTROL WILL BE DETERMINED BY THE ENGINEER IN THE FIELD, AND THERE WILL BE NO CHANGE IN PRICE DUE TO A CHANGE IN PLAN QUANTITY.

TEMPORARY EROSION CONTROL BILL OF MATERIALS		
ITEM	UNIT	TOTALS
TEMPORARY EROSION CONTROL SEEDING	POUND	600
PERIMETER EROSION BARRIER	FOOT	822
TEMPORARY DITCH CHECKS	EACH	10

EROSION CONTROL PLAN