ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
C.H. 11	06-0002 -00-BR	DEKALB	20	1
		ILLINOIS		

CONTRACT NO. 87366

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PLANS FOR PROPOSED HIGHWAY BRIDGE PROGRAM

SECTION 06–00002–01–BR
DEKALB COUNTY
PROJECT NO. BHM–5076 (006)
F.A.U. 5411 (C.H. 11–SUYDAM ROAD)
C–93–104–08
CONTRACT NO. 87366

SCALES

PLAN — 0' 50' 100'
PROFILE HORIZ. — 0' 50' 100'
PROFILE VERT. — 0' 5' 10'
CROSS SECTIONS — 0' 5' 10'

INDEX OF SHEETS

SHEET NO.	TITLE
1.	COVER SHEET
2.	SUMMARY OF QUANTITIES, GENERAL NOTES & TYPICAL SECTIONS
3.	PLAN AND PROFILE SHEET
4.	GUARDRAIL AND SHOULDER DETAILS
5.–16.	BRIDGE PLANS
17.–20.	STATION CROSS SECTIONS

STANDARDS

280001–04	TEMPORARY EROSION CONTROL SYSTEMS
515001–02	NAME PLATES FOR BRIDGES
630001–07	STEEL PLATE BEAM GUARDRAIL
631032–03	TRAFFIC BARRIER TERMINAL, TYPE 6A
720011	METAL POSTS FOR SIGNS, MARKERS AND DELINEATORS
728001	TELESCOPING STEEL SIGN SUPPORT
729001	APPLICATIONS OF TYPES A AND B METAL POSTS (FOR SIGNS AND MARKERS)
701901	TRAFFIC CONTROL DEVICES
780001–01	TYPICAL PAVEMENT MARKINGS
BLR 21–7	TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS

R. 5 E. OF THE 3RD P.M.

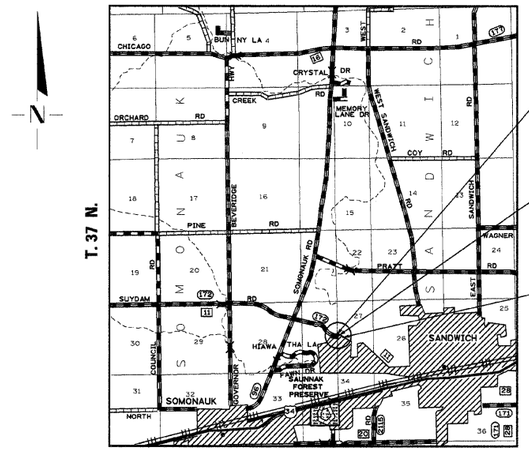

IMPROVEMENT BEGINS
STA. 42+45.64

STA. 43+96 – SPECIAL BRIDGE DESIGN
3–SPAN CONTINUOUS R.C. SLAB BRIDGE ON EXISTING CLOSED R.C. ABUTMENTS AND NEW INDIVIDUALLY ENCASED PILE BENT PIERS.
SPANS @ 30'–9", 38'–6", 30'–9" ALONG TANGENT
104'–1 1/2" BK.–BK. ABUTS. ALONG TANGENT
32'–6" ROADWAY, SKEW 20° RT., S.N. 019–3017

IMPROVEMENT ENDS
STA. 45+47.97

LOCATION PLAN

GROSS LENGTH OF SECTION = 302.33 FEET = 0.057 MILES
NET LENGTH OF SECTION = 302.33 FEET = 0.057 MILES

0 1 2 3 4 5
SCALE IN MILES

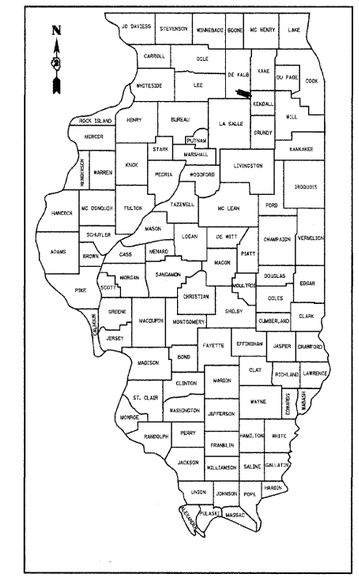

LOCATION OF SECTION INDICATED THUS: ▬

CLASSIFICATION: MINOR ARTERIAL – URBAN
DESIGN VOLUME: TWO–WAY DHV <1250
CURRENT ADT: 2840 (2008)
DESIGN SPEED: 40 M.P.H.

TOLL FREE JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS (J.U.L.I.E.)
TELEPHONE NUMBER 1-800-892-0123

APPROVED 9/2/ 20 08
COUNTY ENGINEER

PASSED 09-03 20 08
DISTRICT THREE ENGINEER OF LOCAL ROADS & STREETS

RELEASED FOR BID BASED ON LIMITED REVIEW 09-03 20 08
DEPUTY DIRECTOR OF HIGHWAYS, REGION TWO ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GARY J. CARTWRIGHT 43408 REGISTERED PROFESSIONAL ENGINEER OF ILLINOIS

Gary J. Cartwright 9-2-08
ILLINOIS PROFESSIONAL NO. 43408
EXPIRES 11-30-09

4440 ASH GROVE
SPRINGFIELD, IL. 62711
(217) 793-8600
www.fehr-graham.com

FEHR-GRAHAM & ASSOCIATES, LLC
ENGINEERING AND SCIENCE CONSULTANTS
FREEPORT, IL ROCKFORD, IL ROCKVILLE, IL MONROE, WI SPRINGFIELD, IL

#47538