SIGN DETAIL

1:76

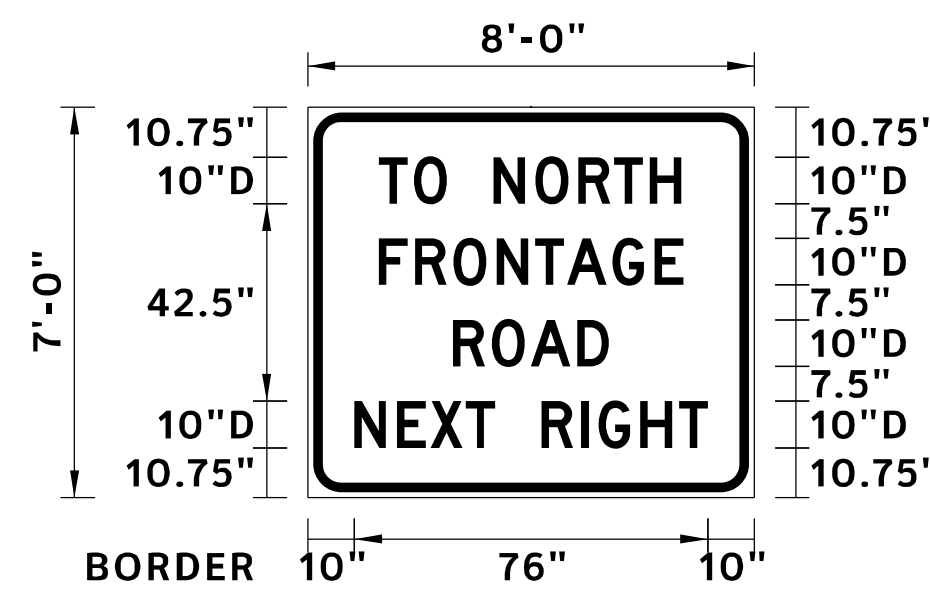

BORDER
R=6"
TH=2"
IN=1.2"

Panel Style: guide_custom.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	JDR–WP–01, JDR–WP–02, JDR–WP–03, JDR–WP–16, JDR–WP–17, JDR–WP–18
WIDTH x HGHT.	8'–0" x 7'–0"
BORDER WIDTH	2"
CORNER RADIUS	6"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: guide_custom.ssi

Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES/SIZE
T	O	N	O	R	T	H				D 2000
15.3	22.8	39.9	48.9	58.2	65.8	73.5			65	10
F	R	O	N	T	A	G	E			D 2000
15.3	23	31.3	40.6	48.9	55.7	65.5	74.5		65.4	10
R	O	A	D							D 2000
31.3	39.6	48	58						33.5	10
N	E	X	T	R	I	G	H	T		D 2000
10	19.2	26.4	34	50.2	58.7	62.5	71.5	79.8	76	10

LIN ENGINEERING,LTD.
Consulting Engineers
Springfield, Illinois

USER NAME = Plotted by Lin21	DESIGNED - RWK	REVISED -	
	DRAWN - RWK	REVISED -	
PLOT SCALE = 6.8784 '/ in.	CHECKED - ST	REVISED -	
PLOT DATE = 3/11/2013	DATE - 3/11/2013	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 3 OF 3 SHEETS | STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
595	(142-1)R-1, 142-1HB	ROCK ISLAND	507	264

CONTRACT NO. 64B84

FED. ROAD DIST. NO. 2 | ILLINOIS | FED. AID PROJECT