SIGN DETAIL

1:100

SIGN PANEL DESIGN SHALL BE COORDINATED WITH
IDOT TRAFFIC OPERATIONS SECTION PRIOR TO MANUFACTURING

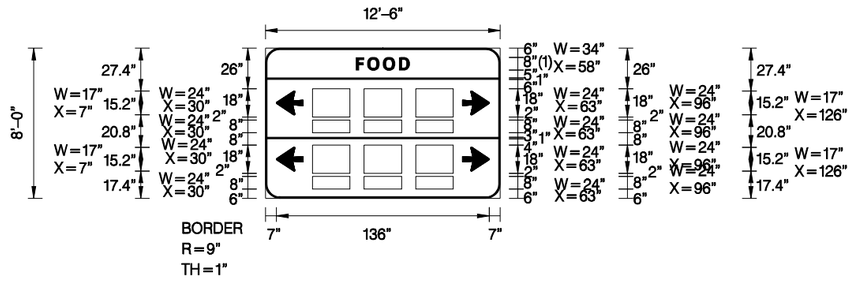

FONT:
(1) ClearviewHwy–5–W
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	1012+00
WIDTH x HGHT.	12'–6" x 8'–0"
BORDER WIDTH	1"
CORNER RADIUS	9"
MOUNTING	Ground
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 47
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 92/Color 92

SYMBOL	ROT	X	Y	WID	HT
logo panel arrow special	90	7	53.4	15.2	17
logo panel arrow special	270	126	53.4	15.2	17
logo panel	0	30	52	24	18
logo panel	0	63	52	24	18
logo panel	0	96	52	24	18
logo panel distance	0	30	42	24	8
logo panel distance	0	63	42	24	8
logo panel distance	0	96	42	24	8
logo panel arrow special	90	7	17.4	15.2	17
logo panel arrow special	270	126	17.4	15.2	17
logo panel	0	30	16	24	18
logo panel	0	63	16	24	18
logo panel	0	96	16	24	18
logo panel distance	0	30	6	24	8
logo panel distance	0	63	6	24	8
logo panel distance	0	96	6	24	8

Panel Style: guide_fwy_next_services_clearview.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

F	O	O	D	LENGTH	SERIES/SIZE
58	65.2	75.2	85.6	34	ClearviewHwy–5–W 8

FILE NAME =	DESIGNED - SMS	REVISED -
...\D468620-sht-signdetail32.dgn	DRAWN - SMS	REVISED -
USER NAME = IDOT	CHECKED - LDC	REVISED -
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -

Kaskaskia Engineering Group, LLC

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: SHEET NO. 32 OF 37 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-[14R;(14HB-4,14,14HVB)BR]	TAZEWELL	2433	1615
		CONTRACT NO. 68620		
	ILLINOIS	FED. AID PROJECT		

• 74 & 155